

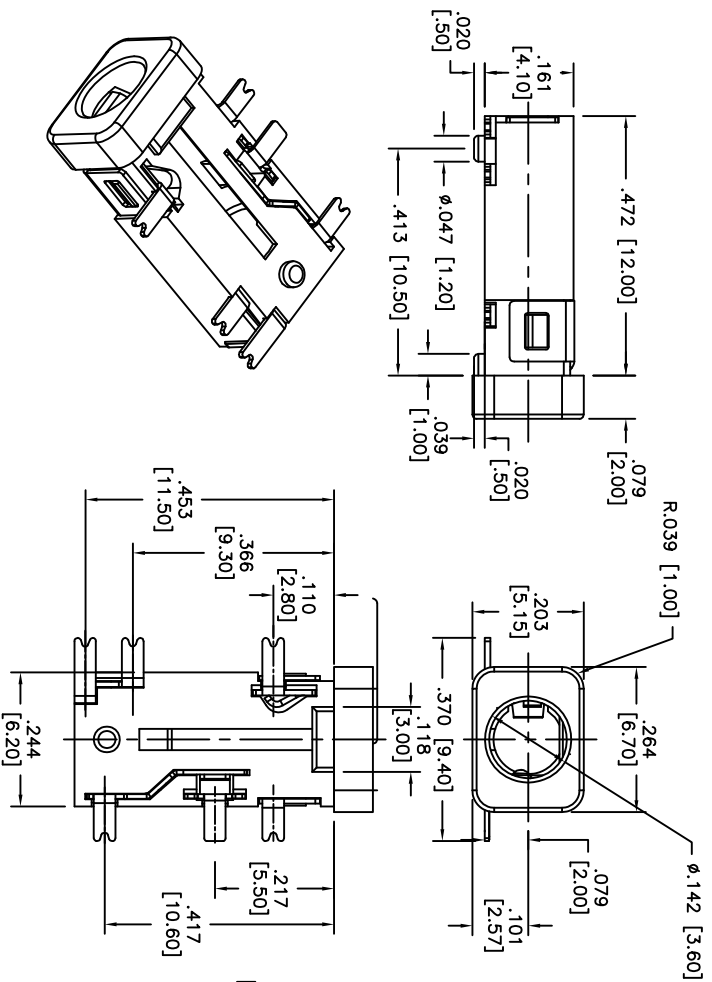


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/13/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

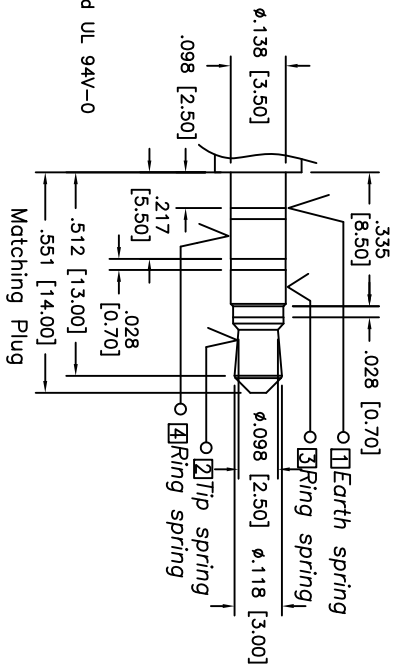

RECOMMENDED PCB LAYOUT  
 (Copper-sided view)

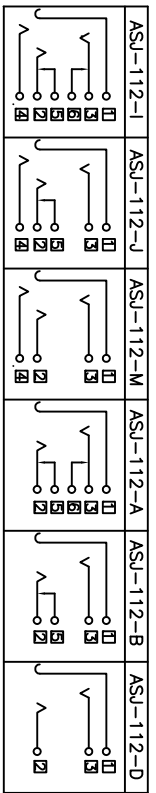

**SPECIFICATIONS:**  
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Copper Alloy  
 Plating: Gold flash over Nickel underplate  
 Electrical: Operating voltage: 30 VDC max.  
 Current rating: 1 Amp max.  
 Contact resistance: 30 mohms max.  
 Insulation resistance: 100 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -25°C to +85°C  
 Environmental: Lead free, RoHS compliant.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

STEREO PHONE JACK, 3.5mm

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED		INCHES		HOLE SIZES		DATE	
.X	± .10	Ø.X	± .10						
.XX	± .020	Ø.XXX	± .015						
.XXX	± .015	Ø.XXX	± .010						
APPROVALS		DATE		TITLE		PART NO.		REV.	
DRAWN	AY	8/13/10		STEREO PHONE JACK, 3.5mm		ASU-112-X		-	
CHECKED	DY	8/13/10				X			
APPROVED						REF: S0002C		SCALE: NTS SHEET 1 OF 1	