


Kinghelm®

KHA(RG1.13)-TX100-IPEX

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN	James		9/26

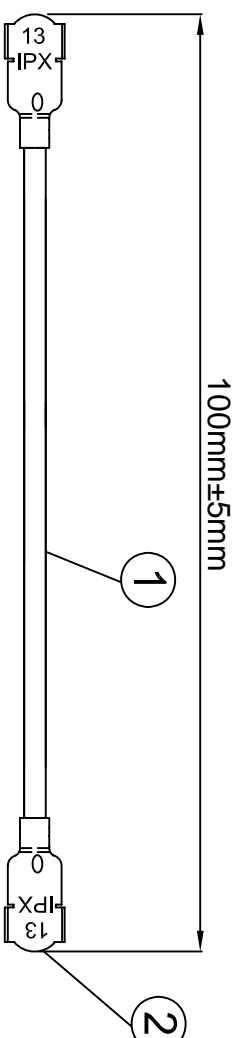

L1	50±1
L2	60±1
L3	120±1

- NOTES:
- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.

- MATERIAL:
 - SEE TABLE
 - ALL COMPONENTS ARE ROHS COMPLIANT.

深圳市金航标电子有限公司

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
②	端子	高仿IPEX 1.13端子, 镀金	1
①	同轴线	RF1.13灰色同轴线, OD:1.13mm	AS

ALL DIMENSION ARE IN MM		DRAWN	DATE	TITLE	
		James	2019-06-01	IPEX TO IPE-X	
COMPUTER GENERATED IN SOLUTIONS DO NOT SCALE THIS DRAWING		CHKD. Frank	2019-06-01	SIZE DWG Number.	
PROJECTION		APPD. Scott	2019-06-01	B	REV
GENERAL TOLERANCE FOR ANGLES XX.XXX XXXX ±1° ±0.3 ±0.25 ±0.150				SCALE:Free	A
				TYPE	SHEET 1 OF 1

CUSTOMER PIN:

4

3

2

1

A

B

C

D

A

B

C

D