


# ATM Equivalent – Low Voltage Miniature Automotive, Fast Acting

## Features

- Miniature Blade Type
- RoHS Compliant



F-05

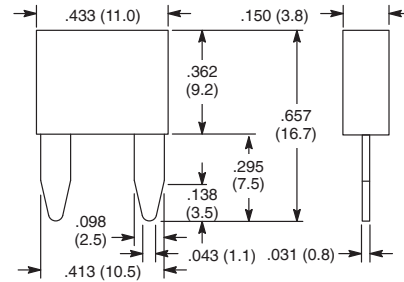

## Specifications

Rated Voltage: 32V

Time Current Characteristics:

| % of Ampere Rating | Opening Time        |
|--------------------|---------------------|
| 110%               | 4 hours min.        |
| 135%               | 0.75 – 1800 seconds |
| 200%               | 0.15 – 5 seconds    |
| 300%               | 0.08 seconds max.   |

Accessories:


| Description                                | NTE Type No. |
|--|--------------|
| In-Line Fuse Holder, up to 15A             | 74-IFHMA15   |
| In-Line Fuse Holder, up to 30A             | 74-IFHMA30   |
| In-Line Fuse Holder w/LED Light, up to 15A | 74-IFHMAL15  |
| In-Line Fuse Holder w/LED Light, up to 30A | 74-IFHMAL30  |

| NTE Type No. | Rated Current | Color Code | Diag No. |
|--------------|---------------|------------|----------|
| 74-MAF2A     | 2A            | Gray       | F-05     |
| 74-MAF3A     | 3A            | Violet     | F-05     |
| 74-MAF4A     | 4A            | Pink       | F-05     |
| 74-MAF5A     | 5A            | Tan        | F-05     |
| 74-MAF7.5A   | 7.5A          | Brown      | F-05     |
| 74-MAF10A    | 10A           | Red        | F-05     |
| 74-MAF15A    | 15A           | Blue       | F-05     |
| 74-MAF20A    | 20A           | Yellow     | F-05     |
| 74-MAF25A    | 25A           | Natural    | F-05     |
| 74-MAF30A    | 30A           | Green      | F-05     |


# ATC Equivalent - Low Voltage Automotive, Fast Acting

## Features

- Fast Acting
- RoHS Compliant

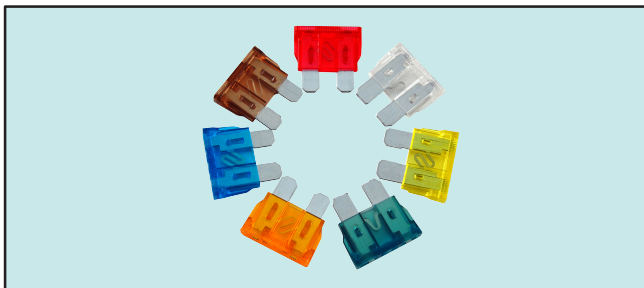

F-06

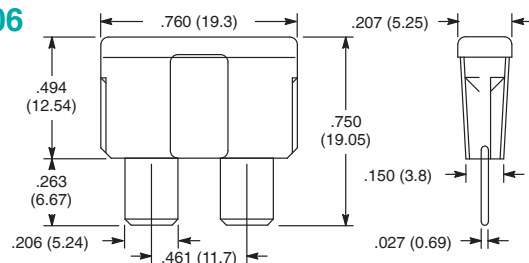

## Specifications

Rated Voltage: 32V

Time Current Characteristics:

| % of Ampere Rating | Opening Time      |
|--------------------|-------------------|
| 110%               | 100 hours min.    |
| 135%               | 1800 seconds max. |
| 200%               | 5 seconds max.    |
| 300%               | 0.08 seconds max. |

Accessories:

| Description                                | NTE Type No. |
|--|--------------|
| In-Line Fuse Holder, up to 15A             | 74-IFHA15    |
| In-Line Fuse Holder, up to 30A             | 74-IFHA30    |
| In-Line Fuse Holder w/LED Light, up to 15A | 74-IFHAL15   |
| In-Line Fuse Holder w/LED Light, up to 30A | 74-IFHAL30   |

| NTE Type No. | Rated Current | Color Code | Diag No. |
|--------------|---------------|------------|----------|
| 74-AF1A      | 1A            | Black      | F-06     |
| 74-AF2A      | 2A            | Gray       | F-06     |
| 74-AF3A      | 3A            | Violet     | F-06     |
| 74-AF4A      | 4A            | Pink       | F-06     |
| 74-AF5A      | 5A            | Tan        | F-06     |
| 74-AF7.5A    | 7.5A          | Brown      | F-06     |
| 74-AF10A     | 10A           | Red        | F-06     |
| 74-AF15A     | 15A           | Blue       | F-06     |
| 74-AF20A     | 20A           | Yellow     | F-06     |
| 74-AF25A     | 25A           | Natural    | F-06     |
| 74-AF30A     | 30A           | Green      | F-06     |