

O/E/N 22 MICRO SWITCH

- 1 Form Z Configuration
- High Switching Reliability
- Suitable for Low Level & Power Level Switching
- Gold Plating Optional

SPECIFICATIONS

Contact Arrangement : 1 Form Z
(SPDT-DB 2 Circuit)

Contact Rating

With 200 ± 20gms

Operating force : 7 Amps (res)
At 28 VDC

1.5 Amps (res)
at 230 VAC

With 325 ± 32gms

Operating force : 10 Amps (res)
at 28 VDC

2 Amps (res)
230 VAC

Maximum Switching Voltage : 220 VDC

Contact Resistance : 100 milli Ohms (Max)

Life Expectancy

Mechanical : 1×10^6 operations

Electrical : 1×10^5 operations at
Rated Load

Dielectric Strength : 150 Vrms.


Insulation Resistance : 100 Meg. Ohms

Ambient Temperature: -25°C to $+55^{\circ}\text{C}$

Pre Travel : $\geq 1.1\text{mm}$

All dimensions are in mm. Specifications subject to change without notice. Tolerance unless otherwise specified is $\pm 10\%$

CIRCUIT DIAGRAMS




All dimensions are in mm. Specifications subject to change without notice.

MATERIALS

- Plunger : Moulded Thermoplastic
- Housing : Moulded Phenolic
- Terminals : Brass Silver Plated
- Contacts : 1. Silver Alloy
2. Silver Alloy
Gold Plated (Optional)

HOW TO ORDER

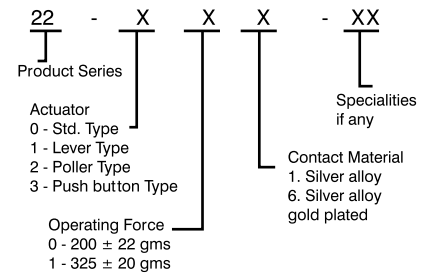

DIMENSIONS

