

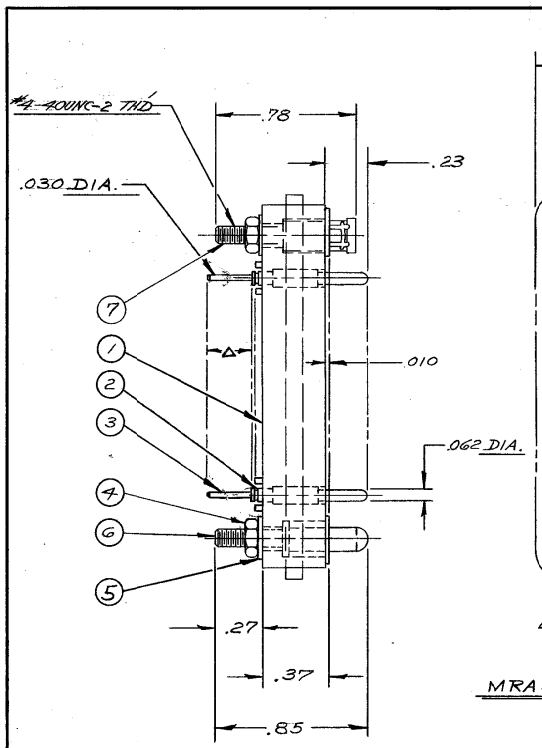


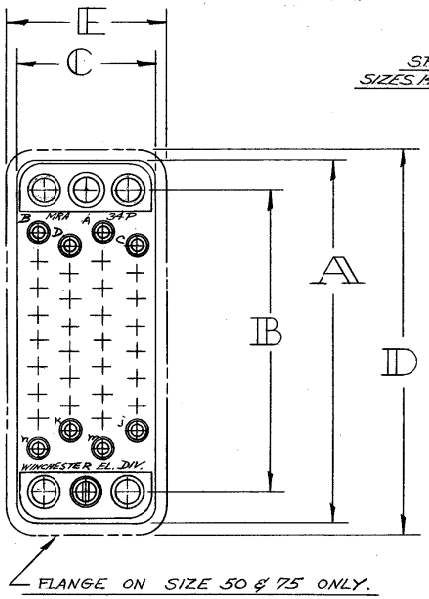

MRA 34 P.D. 8 G SHOWN



CATALOG NO.	A	B	C	D	E		
MRA 9 P.D. △ G	1.31	1.000	.38	—	—		
14	1.25	.937	.44	—	—		
20	1.56	1.250	.44	—	—		
34	2.00	1.688	.75	—	—		
41	2.63	2.312	.44	—	—		
42	2.31	2.000	.75	—	—		
50	2.59	2.282	.75	2.72	.88		
66	2.28	1.969	1.13	—	—		
75	2.59	2.282	1.11	2.72	1.23		
MRA 104 P.D. △ G	2.75	2.375	1.53	—	—		


(A1) 1. MOLDING-MALE — DIALLYL PHTHALATE TYPE MDG, MIL-M-14E, MIL-P-45387 [2]
2. CLIP SPRING-PHOS. BRONZE, QQ-B-750, GOLD OVER COPPER
3. CONTACT PIN-BRASS, QQ-B-626, GOLD OVER COPPER.
4. NUT, HEX-BRASS, QQ-B-626, GOLD OVER COPPER.
5. LOCK WASHER-PHOS. BRONZE, QQ-B-750, GOLD OVER COPPER.
6. GUIDE PIN-BRASS, QQ-B-626, GOLD OVER COPPER.
7. GUIDE SOCKET-PHOS. BRONZE, QQ-B-750, GOLD OVER COPPER.
8. SPACER — ALUMINUM, WW-T-700 ANODIZE & SEAL IN POTASSIUM DICHROMATE.

NOTES:
1. △ NUMBER IN THIS LOCATION OF CATALOG NUMBER INDICATES CONTACT EXTENSION ABOVE REAR MOUNTING FACE IN 32 NDS
(A2) 2. FOR 66 USE DIALLYL PHTHALATE TYPE SDS-F. PER MIL-M-14.

22857 | A

FACES OF THE "MRA" MOLDINGS

MALE CONTACTS NO. 9 THRU 104
(SIZE 50-8 NOT AVAILABLE)

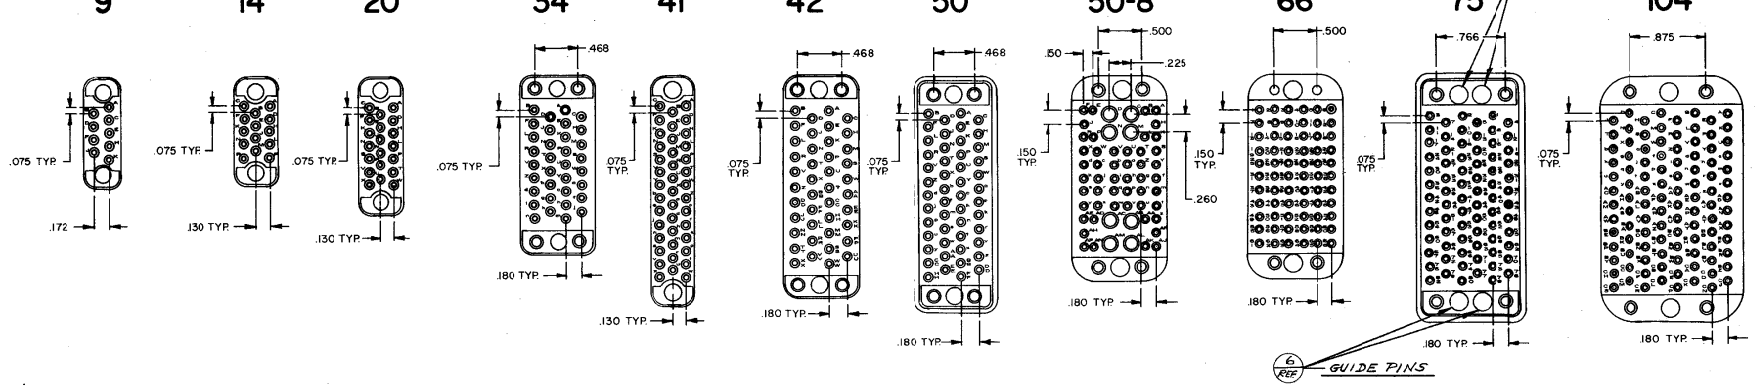

This drawing, the designs and ideas embodied in the device to which it relates, and the methods of producing the device, are the property of Winchester Electronics, and should not be loaned, reproduced, copied, or disclosed to anyone, in any manner, without the consent of Winchester Electronics

REV.	CHANGE	DATE	
A	1) REV. MATL. ITEMS 2) ADDED NOTE 2	4/16/80	EN 15966

TOLERANCE UNLESS OTHERWISE SPECIFIED: .XX = ±.02 .XXX = ±.007 ANGULAR ±

B

EN11806

TITLE
COMPOSITE OUTLINE ASSEMBLY
MRA ** P.D △ G

SCALE	DR. DALEY	CK'D. Vic Ros	AP'D. Eder
2X1	DATE 9-23-68	DATE 9-25-68	DATE 9-25-68

WINCHESTER ELECTRONICS
OAKVILLE, CONN.

DWG SIZE		REV.
C	22857	A

June 2006 - This drawing became the property of Winchester Electronics Corporation, Wallingford, CT.