



SHEET OF

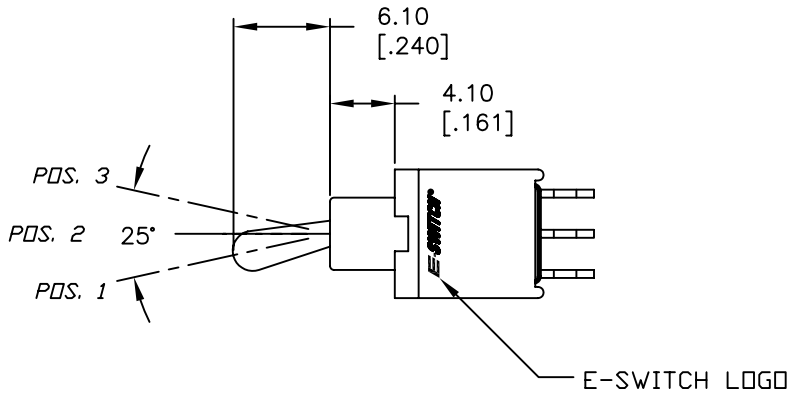


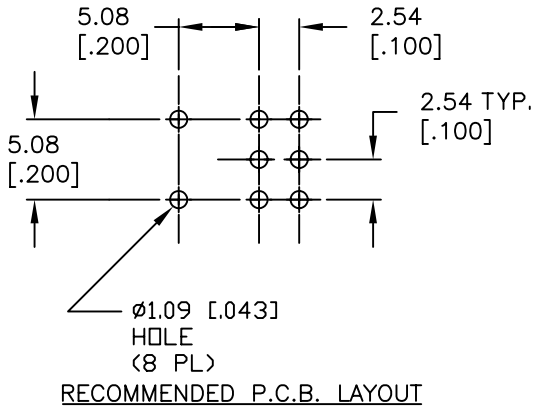


RECOMMENDED P.C.B. LAYOUT

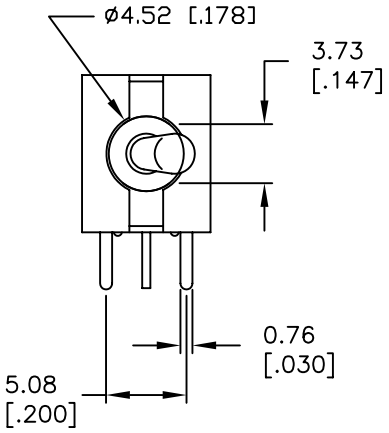

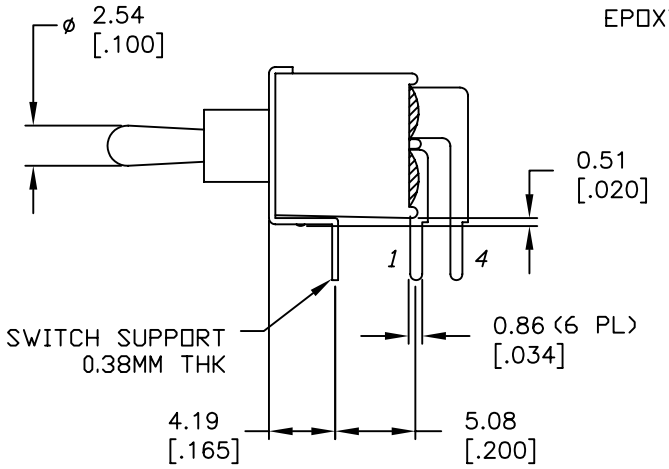

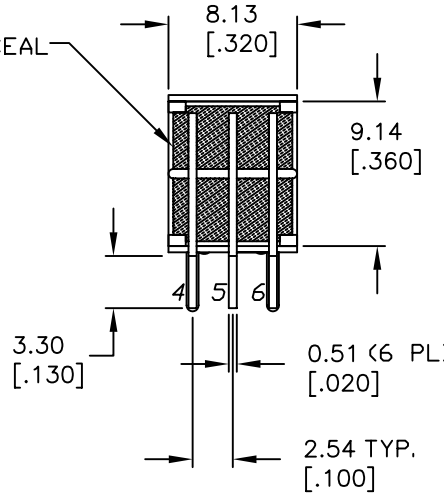



CIRCUIT: 2PDT

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4(VA) max. @20V max. (AC or DC)
5. FIXED TERM. & MOVING CONTACT: Copper alloy w/Gold plate over Nickel plate
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS min. @sea level.
9. OPERATING TEMP.: -30°C to 85°C

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	OFF	ON
2-3,5-6	OPEN	2-1,5-4

REV.	ECN	DESCRIPTION	DATE	CHKD
B	15419	REMOVED FLAT EDGES ON BUSHING	10/20/05	PH
A	11477	RELEASED FOR PRODUCTION	5/16/01	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 200A WMDP-3 T2 A1 M6 R E

SCALE	DATE	DR	DWG	REV
2:1	5/16/01	CJB	T202303	B