


DESCRIPTION: 2MM SINGLE ROW RECEPTACLE

MATERIAL:
HOUSING: NYLON 6T (UL 94V-0) BLACK
CONTACT: PHOSPHOR BRONZE
PLATING: GOLD FLASH ENTIRE CONTACT
RoHS COMPLIANT

ELECTRICAL:
CURRENT RATING: 1 AMP
CONTACT RESISTANCE: 20 mOHM MAX.
INSULATOR RESISTANCE: 5000 MEGOHMS MIN.
DWV: 500V AC
OPERATING TEMP:
-40°C TO +105°C
PROCESS TEMP: 260°C FOR 10 SECONDS

"L" = NO. OF CONTACTS PER ROW X .079

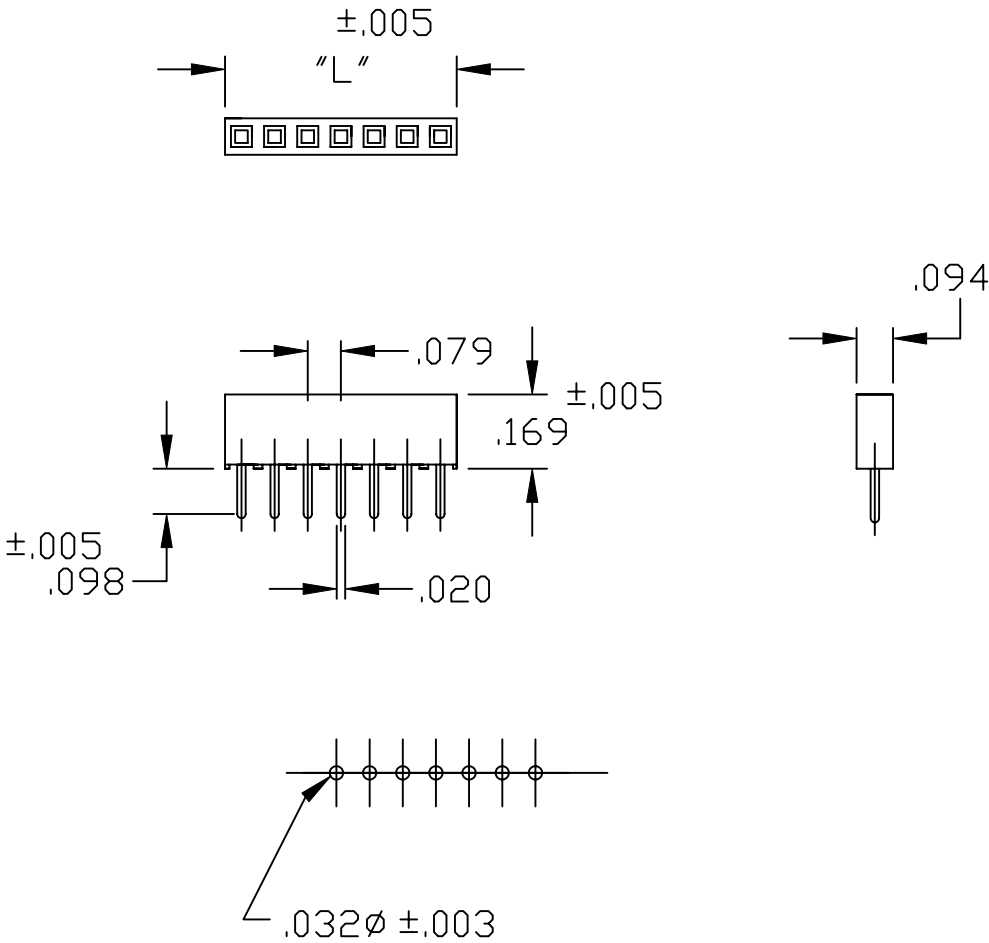

SERIES 2563 YY 01RP2
2563 = SINGLE ROW

POSITIONS SINGLE - INCREMENTS OF 1
(03 TO 40)

TYPE: 01 = STRAIGHT

PLATING: P2 = GOLD FLASH

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 1-30-06	
		CHECKED:		DATE:	
NorComp	SCALE: NTS		SHEET 1 OF 1		REV 1
	DWG NO. 2563YY01RP2				