


C-15/13-F04-P-NLCH-XX

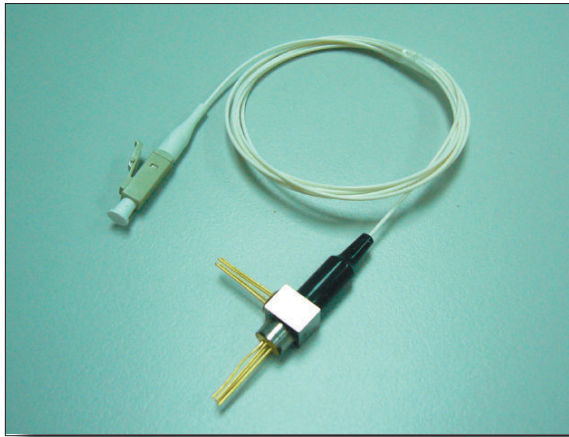

Features

- Multi fiber bi-directional operation
- Laser diode with multi-quantum- well structure
- Low threshold current
- InGaAs/InP PIN Photodiode with trans-impedance amplifier
- High sensitivity with AGC*
- Differential ended output
- Single Supply Voltage +3.3V
- Integrated WDM coupler
- Un-cooled operation from -40°C to +85°C
- Hermetically sealed active component
- Multi mode fiber pigtailed with optional LC connector
- Design for fiber optic networks
- RoHS Compliant available

Absolute Maximum Rating (Tc=25°C)

Parameter	Symbol	Value	Unit
Fiber Output Power H	P_f	2(H)	mW
LD Reverse Voltage	V_{RLD}	2	V
PIN-TIA Voltage	V_{CC}	4	V
Operating Temperature	T_{opr}	-40 to +85	°C
Storage Temperature	T_{stg}	-40 to +85	°C

(All optical data refer to a coupled 62.5/125µm Multimode fiber)

Optical and Electrical Characteristics(Tc=25°C)

Parameter	Symbol	Min	Typical	Max	Unit	Test Condition
Laser Diode						
Optical Output Power H	P_f	1	1.6	-	mW	CW, $I_{th}+ 25mA$, kink free
Peak Wavelength	λ	1530	1550	1570	nm	CW, $P_f=P_f(\text{Min})$
Spectrum Width (RMS)	$\Delta\lambda$	-	-	3	nm	CW, $P_f=P_f(\text{Min})$
Threshold Current	I_{th}	-	10	15	mA	CW
Forward Voltage	V_F	-	1.2	1.5	V	CW, $P_f=P_f(\text{Min})$
Rise/Fall Time	t_r/t_f	-	-	0.3	ns	$I_{bias}=I_{th}$, 10% to 90%
Monitor Diode						
Monitor Current	I_m	100	-	-	µA	CW, $P_f=P_f(\text{Min})$, $V_{RPD}=2V$
Dark Current	I_{DARK}	-	-	0.1	µA	$V_{RPD}=5V$
Capacitance	C_t	-	6	15	pF	$V_{RPD}=5V$, $f=1\text{MHz}$
Module						
Tracking Error	$\Delta P_f/P_f$	-1.5	-	1.5	dB	APC, -40 to +85°C
Optical Crosstalk	CRT	< -45			dB	

Note:

- 1.Pin assignment can be customized.
- 2.Specifications subject to change without notice.

Detector $\lambda=1100-1360\text{nm}$ **DC Electrical Characteristics($T_c=25^\circ\text{C}$)**

Parameter	Symbol	Min	Typical	Max	Unit	Test Condition
Power Supply	V _{cc}	3.0	3.3	3.6	V	
Differential Output Voltage	V _d	-	260	450	mV	
Supply Current (RL=50 Ω)	I _{cc}	-	21	30	mA	

AC/Optical and Electrical Characteristics($T_c=25^\circ\text{C}$)



Parameter	Symbol	Min	Typical	Max	Unit	Test Condition
Detection Range		1100	1310	1360	nm	-
Gain @ 10 Mbps Differential	G	6	7	-	V/mW	Measure differentially,AC coupled,RL=50 Ω
Bandwidth	BW	404	470	-	MHz	-
Saturation Power	Psat	-7	-6	-	dBm	BER<10 ⁻¹⁰ @622Mbps PRBS 2 ²³ -1,Er=10dB
Sensitivity	Sens.	-	-33	-30	dBm	BER<10 ⁻¹⁰ @622Mbps PRBS 2 ²³ -1,Er=10dB
Output Resistance	Rout	48	50	52	ohm	-

C-15/13-F04-P-NLCH-XX

Pin Assignment

A Type


- Pin 1 : Laser Cathode
- Pin 2 : Laser Anode and Case Gnd
- Pin 3 : Monitor Diode Anode
- Pin 4 : Monitor Diode Cathode

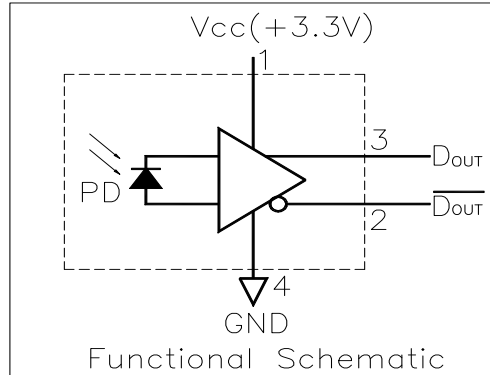

Outline Dimensions

Units in mm.

Part Number: C-15/13-F04-P-NLCH-XX

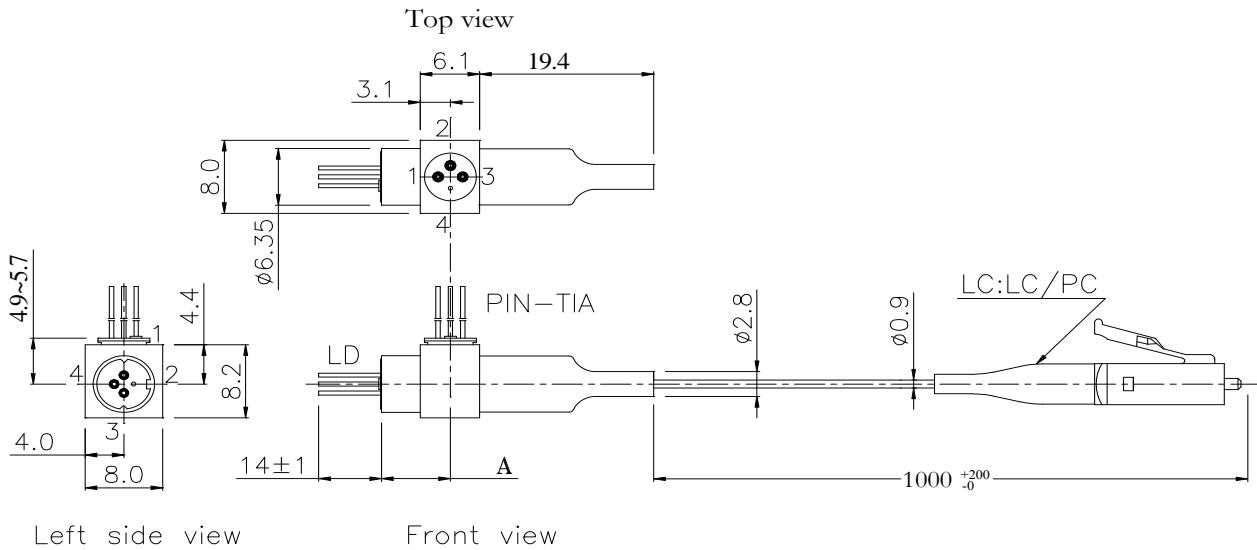

DIMENSION: A:7.0~7.9 mm

Ordering Information

C-15/13-F04-P-NLCH-XX

1550nm Transmitter
1310nm Receiver

04: 622 Mb/s PIN-TIA+3.3V

Package
P=Pigtail

Fiber Application
N=62.5/125μm

RoHS Compliant
-/G5/GR

Blank = RoHS non-compliant product

G5 = RoHS 5/6-compliant product (lead exemption)

GR = Full RoHS compliant product (no exemption)

Connector
LC

Fiber Output Power
H

Warnings

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.
Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Legal Notice

IMPORTANT NOTICE!
All information contained in this document is subject to change without notice, at LuminentOIC's sole and absolute discretion. LuminentOIC warrants performance of its products to current specifications only in accordance with the company's standard one-year warranty; however, specifications designated as "preliminary" are given to describe components only, and LuminentOIC expressly disclaims any and all warranties for said products, including express, implied, and statutory warranties, warranties of merchantability, fitness for a particular purpose, and non-infringement of proprietary rights. Please refer to the company's Terms and Conditions of Sale for further warranty information.

LuminentOIC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents, services, or intellectual property described herein. No license, either express or implied, is granted under any patent right, copyright, or intellectual property right, and LuminentOIC makes no representations or warranties that the product(s) described herein are free from patent, copyright, or intellectual property rights. Products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. LuminentOIC customers using or selling products for use in such applications do so at their own risk and agree to fully defend and indemnify LuminentOIC for any damages resulting from such use or sale.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN "AS IS" BASIS. Customer agrees that LuminentOIC is not liable for any actual, consequential, exemplary, or other damages arising directly or indirectly from any use of the information contained in this document. Customer must contact LuminentOIC to obtain the latest version of this publication to verify, before placing any order, that the information contained herein is current.

© LuminentOIC, Inc. 2006
All rights reserved