

DS7836/DS8836 Quad NOR Unified Bus Receiver


General Description

The DS7836/DS8836 are quad 2-input receivers designed for use in bus organized data transmission systems interconnected by terminated 120Ω impedance lines. The external termination is intended to be 180Ω resistor from the bus to the +5V logic supply together with a 390Ω resistor from the bus to ground. The design employs a built-in input hysteresis providing substantial noise immunity. Low input current allows up to 27 driver/receiver pairs to utilize a common bus. Performance is optimized for systems with bus rise and fall times $\leq 1.0 \mu\text{s}/\text{V}$.

Features


- Low input current with normal V_{CC} or $V_{CC} = 0\text{V}$ (15 μA typ)
- Built-in input hysteresis (1V typ)
- High noise immunity (2V typ)
- Temperature-insensitive input thresholds track bus logic levels
- TTL compatible output
- Matched, optimized noise immunity for "1" and "0" levels
- High speed (18 ns typ)

Typical Application

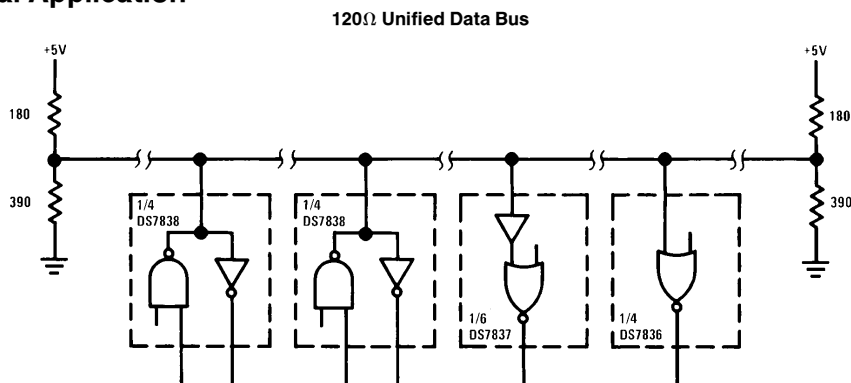

TL/F/5810-1

Connection Diagram

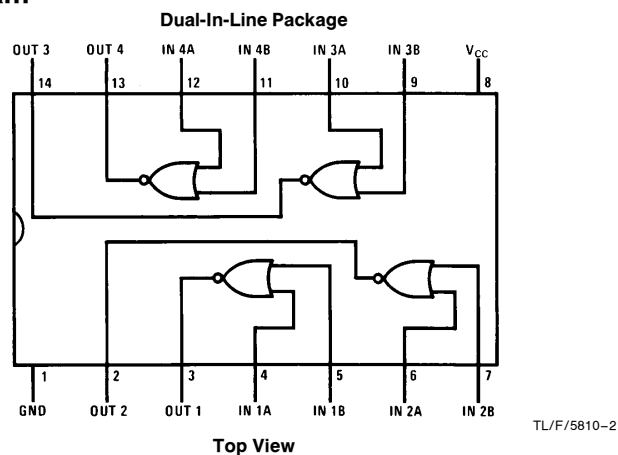

TL/F/5810-2

Order Number DS7836J or DS8836N
See NS Package Number J14A or N14A

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	7.0V
Current Voltage	5.5V
Storage Temperature Range	−65°C to +150°C
Maximum Power Dissipation* at 25°C	
Cavity Package	1308 mW
Molded Package	1207 mW
Lead Temperature (Soldering, 4 seconds)	260 °C

*Derate cavity package 8.7 mW/°C above 25°C; derate molded package 9.7 mW/°C above 25°C.

Operating Conditions

	Min	Max	Units
Supply Voltage (V_{CC})			
DS7836	4.5	5.5	V
DS8836	4.75	5.25	V
Temperature (T_A)			
DS7836	−55	+125	°C
DS8836	0	+70	°C

Electrical Characteristics

The following apply for $V_{MIN} \leq V_{CC} \leq V_{MAX}$, $T_{MIN} \leq T_A \leq T_{MAX}$, unless otherwise specified (Notes 2 and 3)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{TH}	High Level Input Threshold	$V_{CC} = \text{Max}$	DS7836 1.65 DS8836 1.80	2.25	2.65	V
V_{IL}	Low Level Input Threshold	$V_{CC} = \text{Min}$	DS7836 0.97 DS8836 1.05	1.30	1.63	V
I_{IN}	Maximum Input Current	$V_{IN} = 4V$ $V_{CC} = \text{Max}$ $V_{CC} = 0V$		15 1	50 50	μA
V_{OH}	Logical "1" Output Voltage	$V_{IN} = 0.5V$, $I_{OUT} = -400 \mu A$	2.4			V
V_{OL}	Logical "0" Output Voltage	$V_{IN} = 4V$, $I_{OUT} = 16 \text{ mA}$		0.25	0.4	V
I_{SC}	Output Short Circuit Current	$V_{IN} = 0.5V$, $V_{OUT} = 0V$, $V_{CC} = \text{Max}$, (Note 4)	−18		−55	mA
I_{CC}	Power Supply Current	$V_{IN} = 4V$, (Per Package)		25	40	mA
V_{CL}	Input Clamp Diode Voltage	$I_{IN} = -12 \text{ mA}$, $T_A = 25^\circ C$		−1	−1.5	V

Switching Characteristics $V_{CC} = 5V$, $T_A = 25^\circ C$ unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{pd}	Propagation Delays	(Notes 4 and 5) Input to Logical "1" Output Input to Logical "0" Output		20 18	30 30	ns

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.


Note 2: Unless otherwise specified min/max limits apply across the $-55^\circ C$ to $+125^\circ C$ temperature range for the DS7836 and across the $0^\circ C$ to $+70^\circ C$ range for the DS8836. All typical values are for $T_A = 25^\circ C$ and $V_{CC} = 5V$.

Note 3: All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.

Note 4: Fan-out of 10 load, $C_{LOAD} = 15 \text{ pF}$ total, measured from $V_{IN} = 1.3V$ to $V_{OUT} = 1.5V$, $V_{IN} = 0V$ to $3V$ pulse.

Note 5: Fan-out of 10 load, $C_{LOAD} = 15 \text{ pF}$ total, measured from $V_{IN} = 2.3V$ to $V_{OUT} = 1.5V$, $V_{IN} = 0V$ to $3V$ pulse.


Physical Dimensions inches (millimeters)

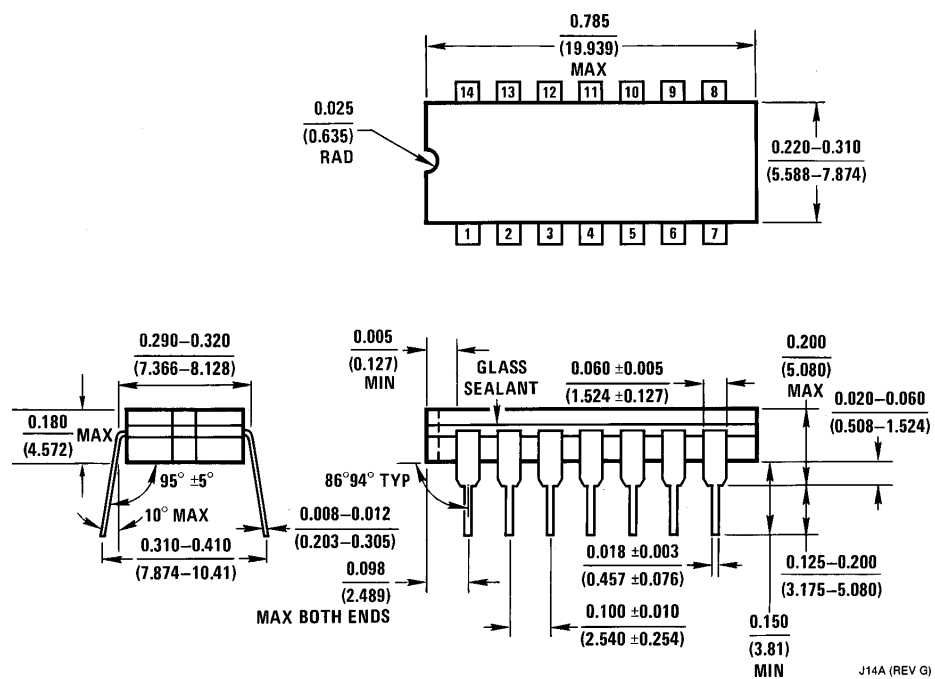

Ceramic Dual-In-Line Package (J)
Order Number DS7836J
NS Package Number J14A

J14A (REV G)

Physical Dimensions inches (millimeters) (Continued)

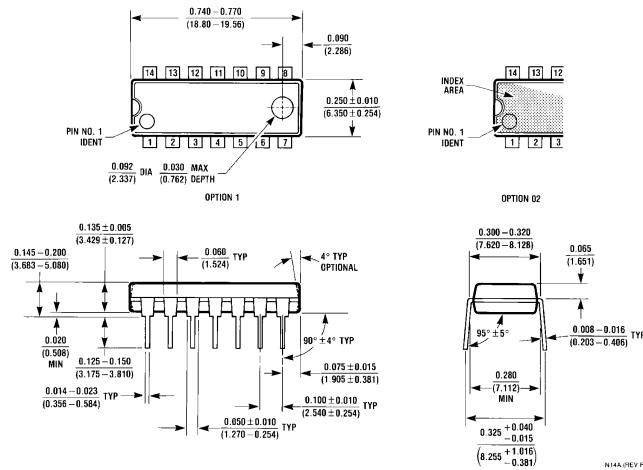

Molded Dual-In-Line Package (N)
Order Number DS8836N
NS Package Number N14A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
 1111 West Bardin Road
 Arlington, TX 76017
 Tel: (800) 272-9959
 Fax: (800) 737-7018

<http://www.national.com>

National Semiconductor Europe

Fax: +49 (0) 180-530 85 86
 Email: europe.support@nsc.com
 Deutsch Tel: +49 (0) 180-530 85 85
 English Tel: +49 (0) 180-532 78 32
 Français Tel: +49 (0) 180-532 93 58
 Italiano Tel: +49 (0) 180-534 16 80

National Semiconductor Hong Kong Ltd.

19th Floor, Straight Block,
 Ocean Centre, 5 Canton Rd.
 Tsimshatsui, Kowloon
 Hong Kong
 Tel: (852) 2737-1600
 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.

Tel: 81-043-299-2308
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.