





深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: TF PUSH 内焊1.28H
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW98-TF08-128B
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-TF18010644
			SHEET NO. 1 OF 1

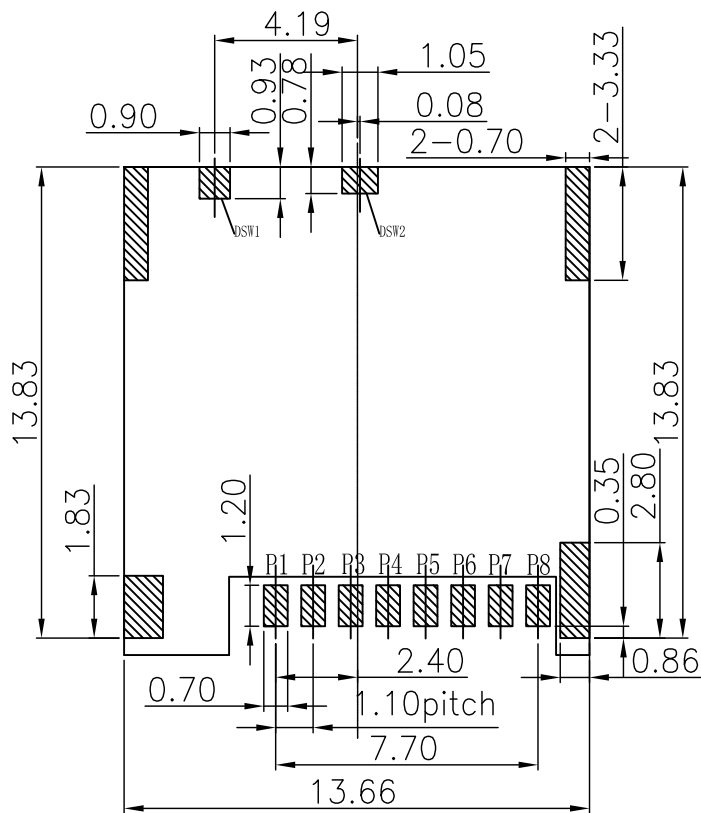

RECOMMEND P.C.B LAYOUT
(General tolerance ± 0.05)

-  PAD AREA
-  KEEP OUT AREA
-  GND PATTERN ONLY

PIN NO.	PIN ASSIGNMENT
P1	DAT2
P2	CD/DAT3
P3	CMD
P4	VDD
P5	CLK
P6	VSS
P7	DAT0
P8	DAT1

Specification

1.MATERIAL:


- 1.1 Insulator: High Temperature Thermoplastic, LCP SZ6505 black 94V-0.
- 1.2 Contact: Beryllium copper(7035-TM06, T=0.15mm)
- 1.3 Shell: SUS301-3/4H T=0.10mm

2.Plating:


- 2.1 Contact: Plated 80u"min Ni Overall
Plated 1u"min Au Selective contact area
Selective 1u"min AU over Ni on solder area
- 2.2 Shell: Solder tail Plated 1u"min AU overll 50u"min Ni

3.Property:

- 3.1 Current Rating :0.5A AC/DC max.
- 3.2 Voltage Rating :12V AC/DC
- 3.3 Ambient Temperature Range : $-20^{\circ}\text{C}\sim+60^{\circ}\text{C}$
- 3.4 Ambient Humidity Range :95% R.H. Max.
- 3.5 Contact Resistance:100m Ω max.
- 3.6 Insulation Resistance:1000M Ω min./500VDC
- 3.7 Durability:5,000 cycles

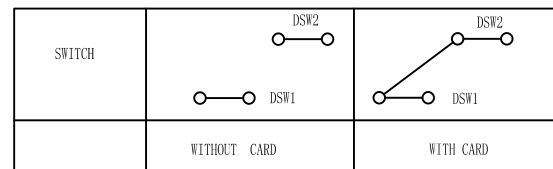

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: TF PUSH 内焊1.28H
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW98-TF08-128B
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-TF18010644
			SHEET NO. 1 OF 1