


Legacy NMA2415-B1T 30 MHz to 3000 MHz

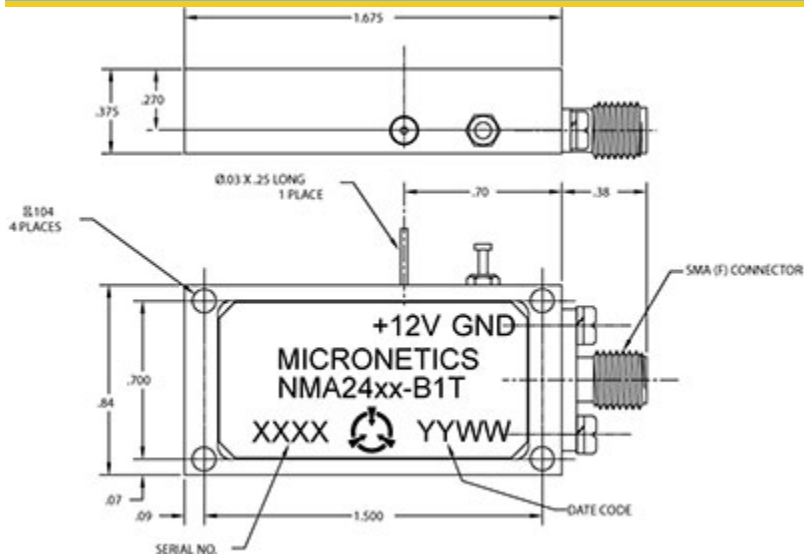

Specifications

RF Frequency	30 MHz to 3000 MHz
Noise Output	78 dB Min ENR
Noise Spectral Density (N_0)	-96 dBm/Hz Min
Flatness	3 dB P-P Max
Peak Factor	5:1
Bias Voltage	12 V
Supply Current	350 mA Max
Impedance	50 ohms

Package and Connectivity

Construction	Coaxial
Package Type	T Package
Connector Type	SMA(f)

Environmental

Operating Temperature	-30 to 85 °C
Storage Temperature	-65 to 125 °C


Notes

Option Standard No TTL

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com

MICRONETICS

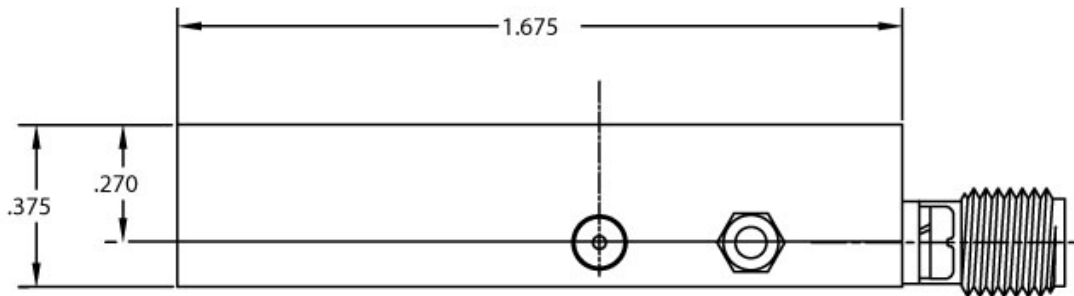

Ø.03 X .25 LONG
1 PLACE

Ø.104
4 PLACES

