



RECOMMENDED P.C.B. LAYOUT





CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	(ON)
2-3	NONE	2-1

( ) = Momentary

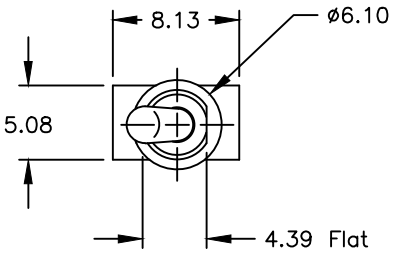

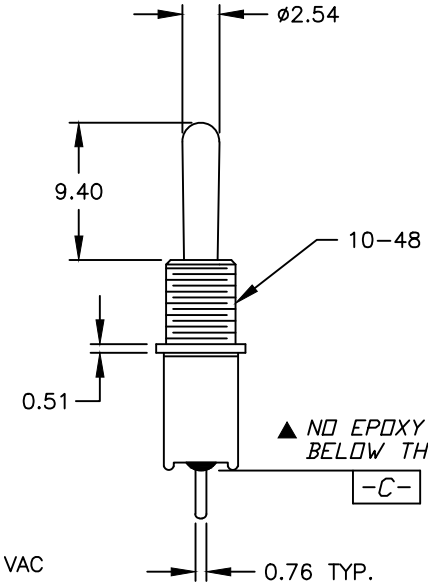

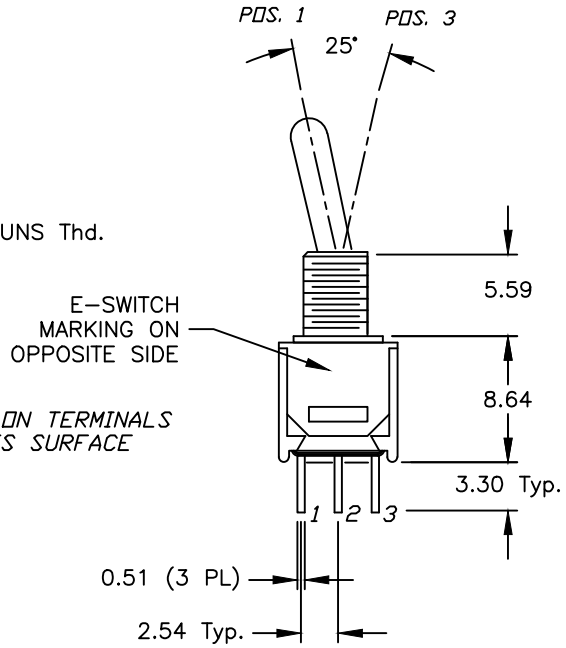

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 3A @ 120 VAC or 28 VDC, 1A @ 250 VAC
▲ 5. CONTACTS: SILVER
6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. HARDWARE TO BE SHIPPED BULK
    T200000-LOCK WASHER-QTY-1
    T200002-LOCK RING-QTY-1
    T200001-HEX NUT-QTY-2

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	21942	INITIAL RELEASE	8/5/15	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E•SWITCH

TITLE				
200MSP2T1B1M2QEH				
SCALE	DATE	DR	DWG	REV
2:1	8/4/2015	MW	ST213005	A