

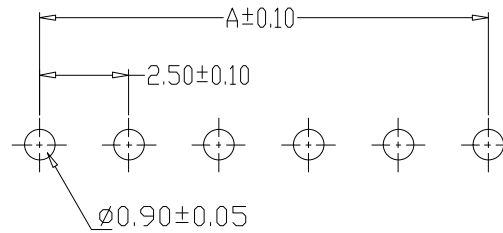


SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

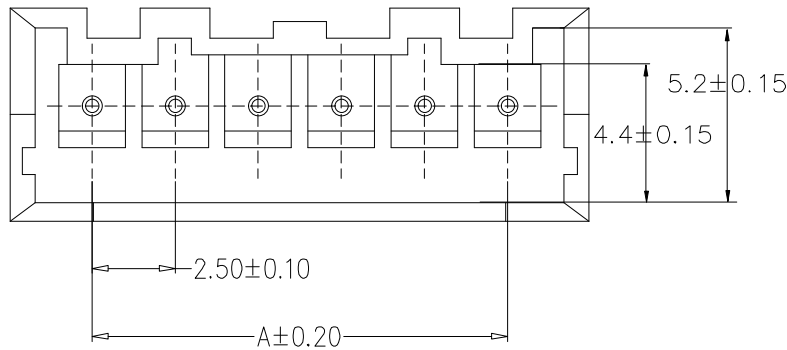

编 号	尺寸 (mm)	
	A	B
HC-XA-2A	2.50	7.50
HC-XA-3A	5.00	10.00
HC-XA-4A	7.50	12.50
HC-XA-5A	10.00	15.00
HC-XA-6A	12.50	17.50
HC-XA-7A	15.00	20.00
HC-XA-8A	17.50	22.50
HC-XA-9A	20.00	25.00
HC-XA-10A	22.50	27.50
HC-XA-11A	25.00	30.00
HC-XA-12A	27.50	32.50
HC-XA-13A	30.00	35.00
HC-XA-14A	32.50	37.50
HC-XA-15A	35.00	40.00
HC-XA-20A	47.50	52.50

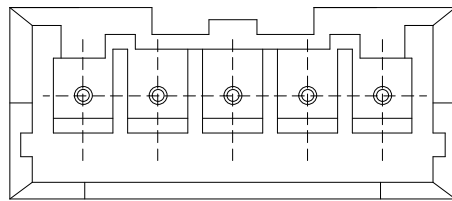

2~5A

PCB LAYOUT

GENERAL TOLERANCE		制 图 DRAWING 2015、07、01	料 号 PART NO.	HC-XA-NA	版 本 REV.	A
X.±0.25	X.'±2'		品 名 TITLE	XA-A	页 次 SHEET	1/1
.X±0.20	.X'±1'		核 准 CHECK	客户料号 CUTL NO.		
.XX±0.15	.XX'±0.5'		核 准 APPROVAL			
.XXX±0.10	.XXX'±0.5'	单 位 UNITS	MM	比 例 SCALE	1:1	深 圳 市 华 灿 天 禄 电 子 有 限 公 司