
2N6660CSM4

MECHANICAL DATA
Dimensions in mm (inches)

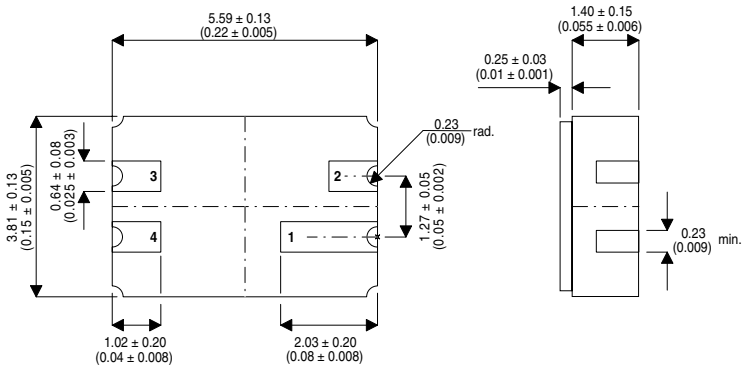

Underside View

LCC3 PACKAGE (MO-041BA)

Pin 1 – Drain	Pin 3 – Source
Pin 2 – N/C	Pin 4 – Gate

N–CHANNEL ENHANCEMENT MODE MOS TRANSISTOR

FEATURES

- **Switching Regulators**
- **Converters**
- **Motor Drivers**
- **JAN Level Screening Options**
- **CECC Screening Options**
- **Space Quality Level Options**

ABSOLUTE MAXIMUM RATINGS (T_{CASE} = 25°C unless otherwise stated)

V_{DS}	Drain – Source Voltage		60V
V_{GS}	Gate – Source Voltage		±40V
I_D	Drain Current	@ T_{CASE} = 25°C	1.1A
I_D	Drain Current	@ T_{CASE} = 100°C	0.8A
I_{DM}	Pulsed Drain Current *		3A
P_D	Power Dissipation	@ T_{CASE} = 25°C	6.25W
P_D	Power Dissipation	@ T_{CASE} = 100°C	2.5W
T_j	Operating Junction Temperature Range		–55 to 150°C
T_{stg}	Storage Temperature Range		–55 to 150°C
T_L	Lead Temperature ($\frac{1}{16}$ " from case for 10 sec.)		300°C

* Pulse Width Limited by Maximum Junction Temperature

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Semelab plc. Telephone +44(0)1455 556565. Fax +44(0)1455 552612.
E-mail: sales@semelab.co.uk Website: http://www.semelab.co.uk

Document Number 7777
Issue 1

SEME LAB

2N6660CSM4

ELECTRICAL CHARACTERISTICS (T_{CASE} = 25°C unless otherwise stated)

	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
	STATIC CHARACTERISTICS						
$V_{(BR)DSS}$	Drain – Source Breakdown Voltage	V_{GS} = 0V	I_D = 10µA	60	100		V
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS} = V_{GS}	I_D = 1.0mA	0.8	1.5	2	
I_{GSS}	Gate – Body Leakage Current	V_{GS} = ±15V				±100	nA
		V_{DS} = 0V	T_{CASE} = 125°C			±500	
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 60V	V_{GS} = 0V			10	µA
		V_{DS} = 48V	V_{GS} = 0V, T_{CASE} = 125°C			500	
$I_{D(on)}$*	On–State Drain Current	V_{DS} =>2V	V_{GS} = 10V	1.5	1.7		A
$R_{DS(on)}$*	Drain – Source On Resistance	V_{GS} = 5V	I_D = 0.3A		4.7	5	Ω
		V_{GS} = 10V			2.7	3	
		I_D = 1.0A	T_{CASE} = 125°C		3.9	4.2	
$V_{DS(on)}$*	Drain – Source On Voltage	V_{GS} = 5V	I_D = 0.3A		1.4	1.5	V
		V_{GS} = 10V	I_D = 1A		2.7	3	
	DYNAMIC CHARACTERISTICS						
g_{FS}*	Forward Transconductance	V_{DS} = 25V	I_D = 0.5A	170	195		ms
C_{iss}	Input Capacitance	V_{DS} = 25V			35	50	pF
C_{oss}	Output Capacitance	V_{GS} = 0V			33	40	
C_{rss}	Reverse Transfer Capacitance	f = 1MHz			2	10	
	SWITCHING CHARACTERISTICS						
t_{ON}	Turn–On Time	V_{DD} = 25V	I_D = 1.0A		8	10	ns
t_{OFF}	Turn–Off Time	R_L = 23Ω	R_G= 25Ω		8	10	
	BODY-DRAIN DIODE CHARACTERISTICS						
I_S	Continuous Source Current (Body Diode)	Modified MOSPOWER Symbol Showing The Integral PN Juncion Rectifier 				-1.1	A
I_{SM}	Source Current[1] (Body Diode)					-3	
V_{SD}	Diode Forward Voltage [1]	I_S = -1.1A	V_{GS} = 0V			-0.9	V
		T_{CASE} = 125°C					

* Pulse Test: $t_p \leq 80$ µs , $\delta \leq 1\%$

	Parameter	Min.	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient			210	°C/W
$R_{\theta JC}$	Thermal Resistance, Junction to Case			20	°C/W

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Semelab plc. Telephone +44(0)1455 556565. Fax +44(0)1455 552612.
E-mail: sales@semelab.co.uk Website: http://www.semelab.co.uk

Document Number 7777
Issue 1