


TOP VIEW

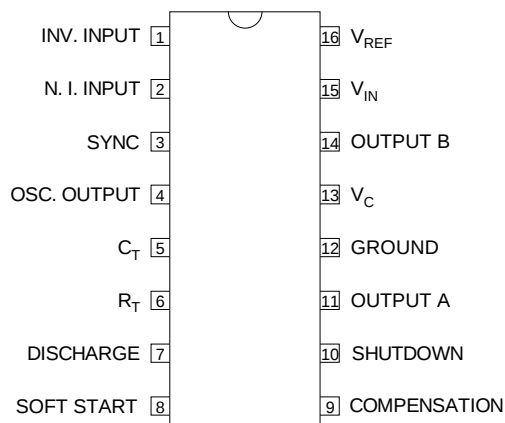

J Package – 16 Pin Ceramic DIP

N Package – 16 Pin Plastic DIP

D Package – 16 Pin Plastic (300) SOIC

REGULATING PULSE WIDTH MODULATORS

FEATURES

- Pin Compatible with 1525A Series
- Low Output Crossover Current
- Fixed 100ns Deadtime
- 100Hz to 500kHz Operating Frequencyrange
- 5.1 volt $\pm$ 1% Reference
- Oscillator Sync. Terminal
- Soft Start
- Undervoltage Lockout
- Latching PWM

Order Information

Part Number	J-Pack 16 Pin	N-Pack 16 Pin	D-16 16 Pin	Temp. Range	Note: To order, add the package identifier to the part number. eg. IP1P125J
IP1P125J	✓			-55 to +125°C	
IP3P125D			✓	0 to + 70°C	
IP3P125J	✓			0 to +70°C	
IP3P125N		✓		0 to +70°C	

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}\text{C}$ unless otherwise stated)

$+V_{IN}$	Input Voltage		+40V
	Collector Voltage		+40V
	Logic Inputs		-0.3 to +5.5V
	Analogue Inputs		-0.3 to $+V_{IN}$
	Output Current, Source or Sink		500mA
	Reference Output Load Current		Internally Limited
	Oscillator Charging Current		5mA
P_D	Power Dissipation	$T_A = 25^{\circ}\text{C}$	1000mW
		Derate @ $T_A > 50^{\circ}\text{C}$	10mW/ $^{\circ}\text{C}$
P_D	Power Dissipation	$T_C = 25^{\circ}\text{C}$	2000W
		Derate @ $T_C > 25^{\circ}\text{C}$	16mW/ $^{\circ}\text{C}$
T_J	Operating Junction Temperature		-55 to +150°C
T_{STG}	Storage Temperature Range		-65 to +150°C
T_L	Lead Temperature	(soldering, 10 seconds)	+300°C

DESCRIPTION

The IP1P125 series of pulse width modulator integrated circuits offers high speed performance optimized for MOSFET drive. Pin compatible with SG1525A, the IP1P125 features low crossover current through the output transistors as well as 95% total usable output pulse width up to 500KHz. High speed latched shutdown is included as well as a precision 5.1 volt reference, error amp, oscillator, latched PWM coparator, totem-pole output drivers, soft-start and undervoltage lockout.

RECOMMENDED OPERATING CONDITIONS

V_{IN}	Input Voltage		+8 to +
	Collector Voltage		+4.5 to +35V
	Sink/Source Load Current (Steady State)		0 to 100mA
	Sink/Source Load Current (Peak)		0 to 400mA
	Reference Load Current		0 to 20mA
	Oscillator Frequency Range		100Hz to 500kHz
R_T	Oscillator Timing Resistor		1.5k Ω to 200k Ω
C_T	Oscillator Timing Capacitor		470pF to 0.1 μ F
	Deadtime Resistor Range		0 to 500 Ω
	Operating Ambient Temperature Range	IP1525A / IP1527A	-55 to +125°C
		IP2525A / IP3527A	-25 to + 85°C
		IP3525A / IP3527A	0 to +70°C

ELECTRICAL CHARACTERISTICS (T_J = Over Operating Temperature Range unless otherwise stated)

Parameter	Test Conditions	IP1P125			IP3P125			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
REFERENCE SECTION								
Output Voltage	T _J = 25°C	5.05	5.10	5.15	5.0	5.1	5.2	V
Line Regulation	V _{IN} = 8 to 35V		1	10		1	15	mV
Load Regulation	I _L = 0 to 20mA		5	15		5	25	
Temperature Stability note5	Over Operating Range		15	50		15	20	mV
Total Output	V _{IN} = 8 to 35V, I _L = 0 to 20mA	5.0		5.2	4.95		5.25	V
Short Circuit Current	V _{REF} = 0	25	70	120	25	70	120	mA
Output Noise Voltage note5	10 Hz ≤ f ≤ 10kHz		40	200		40	200	μVrms
Long Term Stability note5			1	10		1	50	$\frac{\text{mV}}{\text{kHr}}$
OSCILLATOR SECTION ²								
Initial Accuracy		37.6	40	42.4	37.6	40	42.4	kHz
Voltage Stability	V _{IN} = 8 to 35V		0.1	0.5		0.1	2	%
Temperature Stability note5	Over Operating Range		1	4		1	6	
Minimum Frequency	R _T = 200kΩ C _T = 0.1μF		80	120		80	120	Hz
Maximum Frequency	R _T = 2kΩ C _T = 470pF R _D = 0Ω		900			900		kHz
Current Mirror	I _{RT} = 2mA	1.7	2.0	2.2	1.7	2.0	2.2	mA
Clock Amplitude	Output, PIN 4, C _T = 0.1μF	3.0	4.0		3.0	4.0		V
Clock Width	Output, PIN 4, C _T = 0.1μF	0.3	0.5	1.0	0.3	0.5	1.0	μs
Sync Threshold		1.2	2.0	2.8	1.2	2.0	2.8	V
Sync Input Current	Sync Voltage = 3.5V		1.0	2.5		1.0	2.5	mA
ERROR AMPLIFIER SECTION ³								
Input Offset Voltage	V _{cm} = 1.5 to 5.2V		0.1	5		2	10	mV
Input Bias Current	V _{cm} = 1.5 to 2.5V		1	10		1	10	μA
Input Offset Current	V _{cm} = 1.5 to 5.2V		0.1	1		0.1	1	
DC Open Loop Gain	Δ V ₀ = 1 to 3V ,R _L ≥ 10 MΩ	60	80		60	80		dB
Gain Bandwidth Product	note5	1	3.5		1	3.5		MHz

ELECTRICAL CHARACTERISTICS (T_J = Over Operating Temperature Range unless otherwise stated)

Parameter	Test Conditions	IP1P125			IP3P125			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
ERROR AMPLIFIER SECTION (cont.) ³								
Output Low Level			0.2	0.5		0.2	0.5	V
Output High Level		3.8	5.6	7.0	3.8	5.6	7.0	
Common Mode Rejection	V _{CM} = 1.5 to 5.2V	60	90		60	90		dB
Supply Voltage Rejection	V _{IN} = 8 to 35V	50	60		50	60		
PWM COMPARATOR								
Minimum Duty Cycle	V _{PIN1} – V _{PIN2} ≥ 150mV	0			0			%
Maximum Duty Cycle	V _{PIN2} – V _{PIN1} ≥ 150mV	45	49		45	49		
Input Threshold	Zero Duty Cycle	0.6	0.9		0.6	0.9		V
Input Threshold	Max. Duty Cycle		3.3	3.6		3.3	3.6	
Input Bias Current		50			50			μA
SHUTDOWN SECTION								
Soft Start Current	V _{SHUTDOWN} = 0V	25	50	80	25	50	80	μA
Soft Start Low Level	V _{SHUTDOWN} = 2V		0.4	0.6		0.4	0.6	V
Shutdown Threshold	To Outputs	0.6	1.3	2.0	0.6	1.3	2.0	
Shutdown Input Current	V _{SHUTDOWN} = 2.5V		0.1	1.0		0.1	1.0	mA
Shutdown Delay note5	PIN 10 to Output T _J = 25°C		50	300		50	300	ns
OUTPUT DRIVERS (each output) ⁴								
Output Low Level	I _{SINK} = 20mA		0.2	0.4		0.2	0.4	V
	I _{SINK} = 100mA		1.0	2.5		1.0	2.5	
Output High Level	I _{SOURCE} = 20mA	18	19		18	19		V
	I _{SOURCE} = 100mA	17	18		17	18		
Collector Leakage Current	V _C = 35V	200			200			V
Rise Time	C _L = 1nF T _J = 25°C		100	300		100	300	ns
Fall Time	C _L = 1nF T _J = 25°C		50	300		50	300	
Dead Time	C _L = 1nF T _J = 25°C		100			100		

NOTES
note5

These parameters, although guaranteed over the recommended conditions are not 100% tested in production.