



## THA4 Series TCVCXO Oscillator

February 2009

**Lead Free** 

- Pletronics' THA4 Series is a temperature compensated voltage controlled crystal oscillator with a HCMOS output.
- The package is designed for high density surface mount designs.
- Tape and Reel packaging is available.
- 8 to 52 MHz
- Stabilities to less than 0.2ppm available
- 5 x 7 mm LCC Ceramic Package
- Optional Voltage Control Function

**Pletronics Inc. certifies this device is in accordance with the RoHS (2002/95/EC) and WEEE (2002/96/EC) directives.**

Pletronics Inc. guarantees the device does not contain the following:  
Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's  
Weight of the Device: 0.3 grams  
Moisture Sensitivity Level: 1 As defined in J-STD-020C  
Second Level Interconnect code: e4

### Absolute Maximum Ratings:

Parameter	Unit
V <sub>CC</sub> Supply Voltage	-0.5V to +6.5V
V <sub>i</sub> Input Voltage	-0.5V to V <sub>CC</sub> + 0.5V
V <sub>o</sub> Output Voltage	-0.5V to V <sub>CC</sub> + 0.5V

### Thermal Characteristics

The maximum die or junction temperature is 155°C  
The thermal resistance junction to board is 30 to 50°C/Watt depending on the solder pads, ground plane and construction of the PCB.

**Part Number:**

<b>THA4</b>	<b>031</b>	<b>035</b>	<b>G</b>	<b>H</b>	<b>015</b>	<b>008</b>	<b>-40.0M</b>	<b>-XX</b>	
Internal code or blank									
Nominal Frequency in MHZ									
<b>Pullability in ppm (Vcontrol)</b> <b>000</b> = TCXO only <b>008</b> = ± 8 ppm minimum <b>015</b> = ± 15 ppm minimum									
<b>Stability in ppm</b> <b>001</b> = ± 0.1 ppm <b>010</b> = ± 1 ppm <b>002</b> = ± 0.2 ppm <b>015</b> = ± 1.5 ppm <b>005</b> = ± 0.5 ppm <b>025</b> = ± 2.5 ppm <b>007</b> = ± 0.7 ppm									
<b>Highest Specified Operating Temperature</b> <b>A</b> = +40°C <b>E</b> = +60°C <b>J</b> = +80°C <b>B</b> = +45°C <b>F</b> = +65°C <b>K</b> = +85°C <b>C</b> = +50°C <b>G</b> = +70°C <b>D</b> = +55°C <b>H</b> = +75°C									
<b>Lowest Specified Operating Temperature</b> <b>A</b> = +10°C <b>E</b> = -10°C <b>J</b> = -30°C <b>B</b> = +5°C <b>F</b> = -15°C <b>K</b> = -35°C <b>C</b> = +0°C <b>G</b> = -20°C <b>L</b> = -40°C <b>D</b> = -5°C <b>H</b> = -25°C <b>M</b> = -45°C									
<b>Highest Supply Voltage*</b> <b>055</b> = 5.5 volts <b>035</b> = 3.5 volts <b>036</b> = 3.6 volts <b>030</b> = 3.0 volts									
<b>Lowest Supply Voltage *</b> <b>045</b> = 4.5 volts <b>031</b> = 3.1 volts <b>030</b> = 3.0 volts <b>027</b> = 2.7 volts									
<b>Series (Part Type, Logic &amp; Package)</b>									

\* Supply Voltage: Select range between 2.7V and 5.5V with ratio of Highest / Lowest ≤ 1.20  
 For Example: the part number for 3.3V nominal could be TCA4030036.....

**ESD Rating**

Model	Minimum Voltage	Conditions
Human Body Model	1500	MIL-STD-883 Method 3115
Charged Device Model	1000	JESD 22-C101

## Electrical Specification for specified V<sub>CC</sub> over the specified temperature range

Item	Min	Max	Unit	Condition
Frequency Range	10	52	MHZ	
Frequency Accuracy <sup>1</sup>	-2.5 -0.1	+2.8 +0.1	ppm	Vcontrol 1.50 volts if used <sup>2</sup>
Frequency Stability versus Supply	-0.2	+0.2	ppm	Load: 15 pF & V <sub>CC</sub> ± 5%
Output Waveform	CMOS			
Output Level High	90	-	% of V <sub>CC</sub>	Load: 15 pF
Output Level High	-	10		
Output Rise and Fall Time	-	8	nS	10% to 90% of V <sub>CC</sub> Load: 15 pF
Output Duty Cycle	40	60	%	50% of V <sub>CC</sub> Load: 15 pF
Phase Noise	-	-62 -91 -116 -137 -145 -145	dBc/Hz	
				1 Hz 10 Hz 100 Hz 1 KHz 10 KHz >10 KHz
V Supply Range <sup>1</sup> V <sub>CC</sub>	2.7	5.5	Volts	
Supply Current	-	3.2 5.0 9.0	mA	15 pF load I <sub>CC</sub> at 13 MHZ I <sub>CC</sub> at 26 MHZ I <sub>CC</sub> at 52 MHZ
Start-up time	-	10	mS	to be within ±3 ppm of the final frequency
Aging	-1.0 -0.5	+1.0 +0.5	ppm	Per year at 25°C for the first year For any year thereafter
Vcontrol Range	0.5	2.70	Volts	1.35 volts nominal
Vcontrol Input Current	-50	+50	uA	
Frequency Pullability <sup>1</sup>	-15	+15	ppm	
Operating Temperature Range <sup>1</sup>	-45	+85	°C	
Storage Temperature Range	-55	+95	°C	

<sup>1</sup> Specified by part number

<sup>2</sup> For all supply voltages, load changes, aging for 1 year, shock, vibration and temperatures

## Reliability: Environmental Compliance

Parameter	Condition
Mechanical Shock	MIL-STD-883 Method 2002, Condition A
Vibration	MIL-STD-883 Method 2007, Condition A
Solderability	MIL-STD-883 Method 2003
Thermal Shock	MIL-STD-883 Method 1011, Condition A

## Part Marking:

**THymda**  
**fff.fff M**  
**PLHXXX**

Where: *ymd* = Date code  
*fff.fff* = frequency in MHZ  
**P** = Pletronics  
*LH* = Lowest Temp, Highest Temp  
**XXX** = Stability

Due to part size limitations, marking cannot identify complete specifications.

### Codes for Date Code YMD

Code	6	7	8	9	0	1	2
Year	2006	2007	2008	2009	2010	2011	2012

Code	A	B	C	D	E	F	G	H	J	K	L	M
Month	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC

Code	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G
Day	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Code	H	J	K	L	M	N	P	R	T	U	V	W	X	Y	Z	
Day	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	

## Package Labeling


Label is 1" x 2.6" (25.4mm x 66.7mm)  
Font is Courier New  
Bar code is 39-Full ASCII

Label is 1" x 2.6" (25.4mm x 66.7mm)  
Font is Arial

 TCA4027050GH015008-12.75M	
Customer P/N:	 12345678
Qty:	 1000      D/C  TC512SA

<b>Pb Free</b>
2nd LvL Interconnect
Category=e4
Max Safe Temp=260C for 10s 2X Max

## Mechanical:

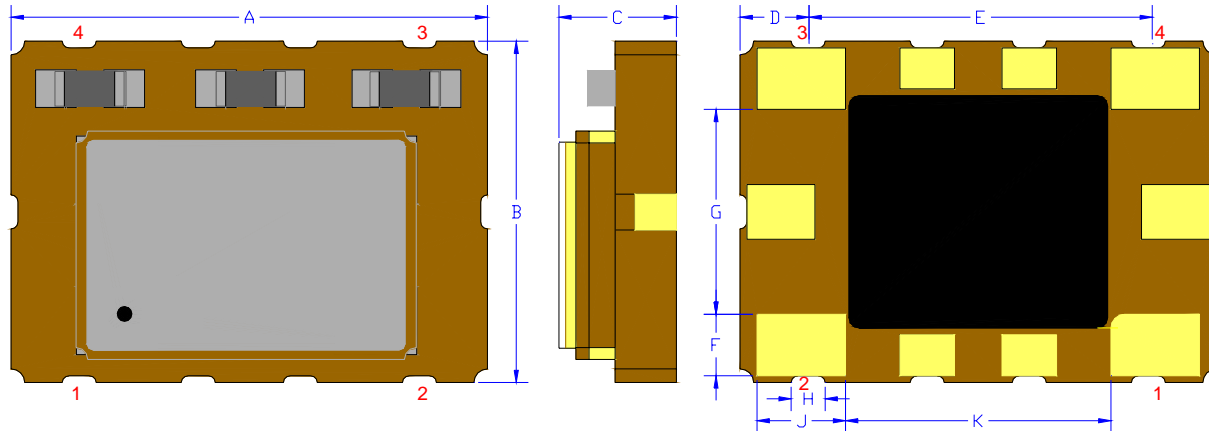

Not to Scale

Pad	Function	Note
1	Vcontrol Input	If this function is not specified, recommend connecting this pad to ground.
2	Ground (GND)	
3	Output	
4	Supply Voltage (V <sub>CC</sub> )	Recommend connecting appropriate power supply bypass capacitors as close as possible.

	Inches	mm
A	0.276 ±0.006	7.00 ±0.15
B	0.197 ±0.006	5.00 ±0.15
C	0.074 ±0.006	1.88 ±0.15
D <sup>1</sup>	0.039	1.00
E <sup>1</sup>	0.197	5.00
F <sup>1</sup>	0.025	0.90
G <sup>1</sup>	0.118	3.00
H <sup>1</sup>	0.020	0.50
J <sup>1</sup>	0.051	1.30
K <sup>1</sup>	0.154	3.90


<sup>1</sup> Typical dimensions

Contacts :

Gold 11.8 pinches 0.3 μm minimum over Nickel 50 to 350 pinches 1.27 to 8.89 μm

There are additional pads on the package bottom, these are **not to be connected to any traces** on the PCB, solder masking on the PCB should be used to make sure no contact is made.

## Reflow Cycle (typical for lead free processing)

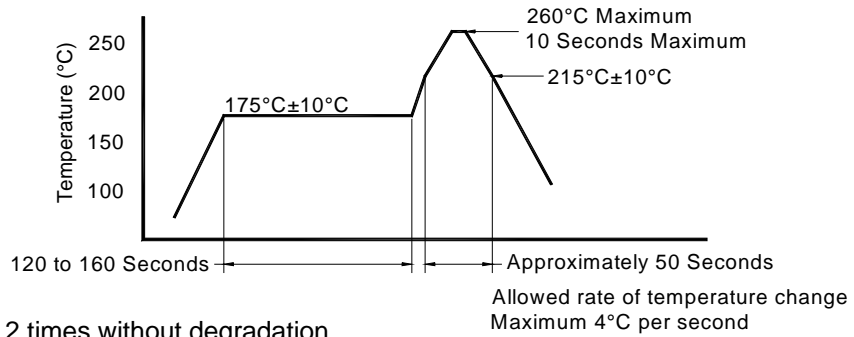



The part may be reflowed 2 times without degradation.

## Tape and Reel: available for quantities of 250 to 1000 per reel

Constant Dimensions Table 1								
Tape Size	D0	D1 Min	E1	P0	P2	S1 Min	T Max	T1 Max
8mm	1.5	1.0	1.75	4.0	2.0 ± 0.05	0.6	0.6	0.1
12mm		1.5			2.0 ± 0.1			
16mm		+0.1 -0.0			± 0.1			
24mm		1.5			± 0.1			

Variable Dimensions Table 2							
Tape Size	B1 Max	E2 Min	F	P1	T2 Max	W Max	Ao, Bo & Ko
16 mm	12.1	14.25	7.5 ± 0.1	8.0 ± 0.1	8.0	16.3	Note 1

Note 1: Embossed cavity to conform to EIA-481-B      Dimensions in mm      Not to scale

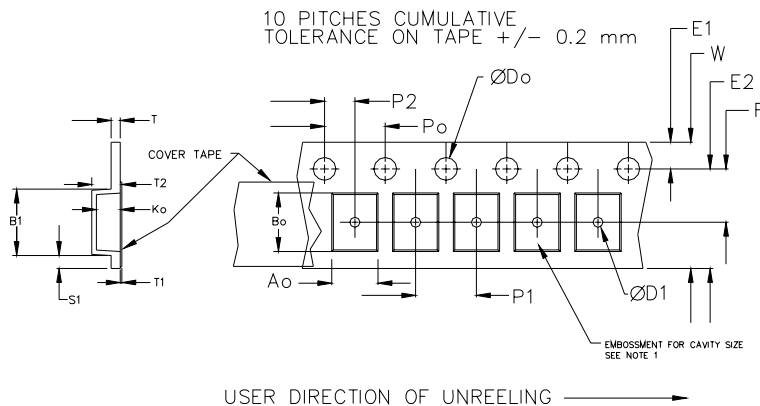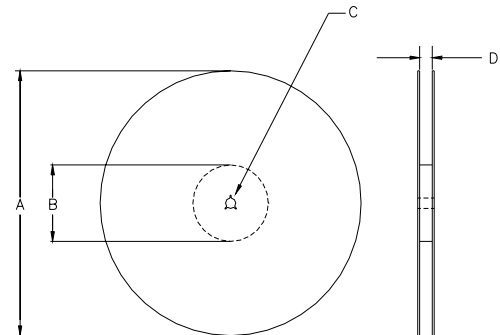

		REEL DIMENSIONS			Tape Width
A	inches	7.0	10.0	13.0	
	mm	177.8	254.0	330.2	
B	inches	2.50	4.00	3.75	
	mm	63.5	101.6	95.3	
C	mm	13.0 +0.5 / -0.2			
D	mm	16.4 +2.0 -0.0	16.4 +2.0 -0.0	16.4 +2.0 -0.0	16.0
	mm	---	---	24.4 +2.0 -0.0	24.0
	mm	---	---	32.4 +2.0 -0.0	32.0

Reel dimensions may vary

from the above

## IMPORTANT NOTICE

Pletronics Incorporated (PLE) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. PLE reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to PLE's terms and conditions of sale supplied at the time of order acknowledgment.

PLE warrants performance of this product to the specifications applicable at the time of sale in accordance with PLE's limited warranty. Testing and other quality control techniques are used to the extent PLE deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

PLE assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using PLE components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

PLE products are not designed, intended, authorized or warranted to be suitable for use in life support applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of PLE products in such applications is understood to be fully at the risk of the customer. Use of PLE products in such applications requires the written approval of an appropriate PLE officer. Questions concerning potential risk applications should be directed to PLE.

PLE does not warrant or represent that any license, either express or implied, is granted under any PLE patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which PLE product or services are used. Information published by PLE regarding third-party products or services does not constitute a license from PLE to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from PLE under the patents or other intellectual property of PLE.

Reproduction of information in PLE data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. PLE is not responsible or liable for such altered documents.

Resale of PLE products or services with statements different from or beyond the parameters stated by PLE for that product or service voids all express and implied warranties for the associated PLE product or service and is an unfair or deceptive business practice. PLE is not responsible for any such statements.

### Contacting Pletronics Inc.

Pletronics Inc.  
19013 36<sup>th</sup> Ave. W, Suite H  
Lynnwood, WA 98036-5761 USA

Tel: 425-776-1880  
Fax: 425-776-2760  
E-mail: [ple-sales@pletronics.com](mailto:ple-sales@pletronics.com)  
URL: [www.pletronics.com](http://www.pletronics.com)

Copyright © 2008, 2009 Pletronics Inc.