



1. Mechanical Dimensions:

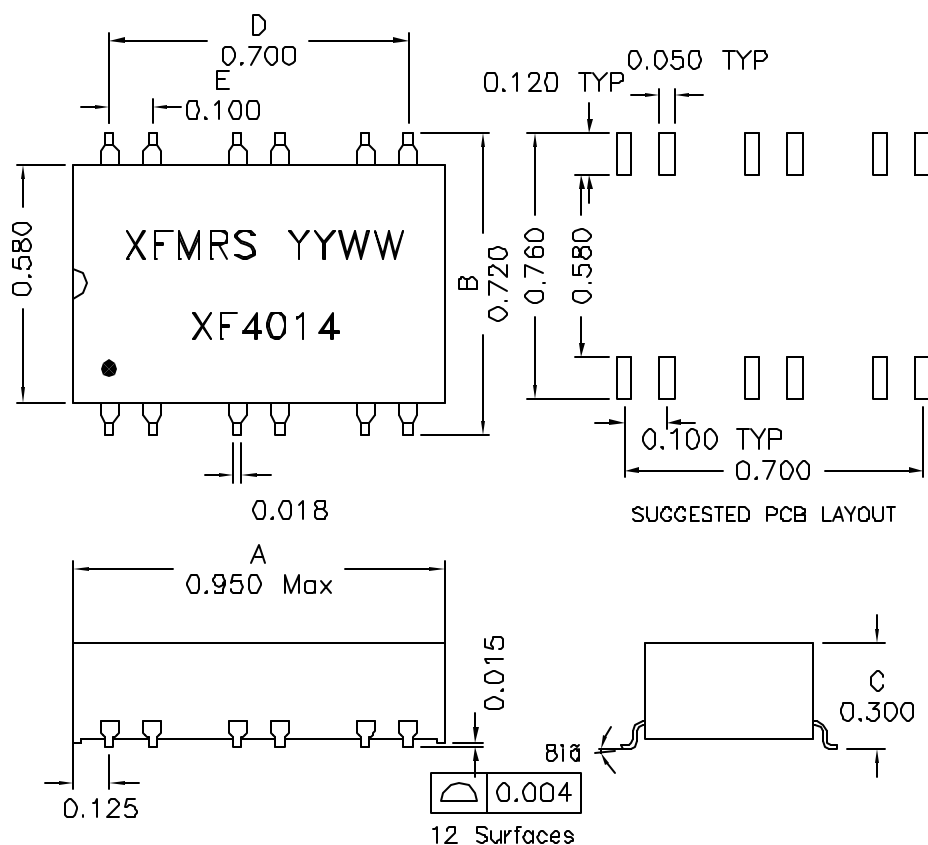

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: $\pm 0.004^{\circ}$ (0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

2. Schematic:

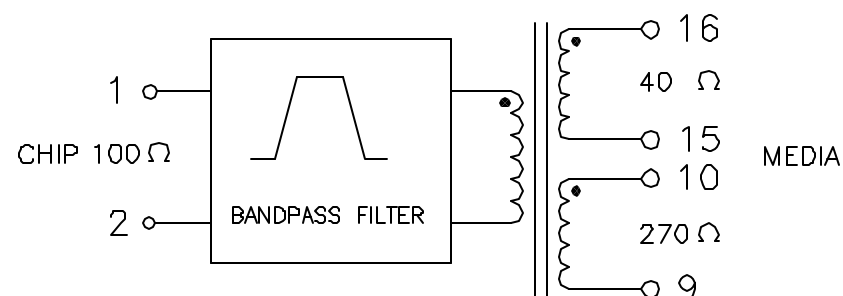

3. Electrical Specifications: @25°C

Hipot: 1500Vrms
 Passband: @900KHz-7.9MHz
 Insertion Loss: 0.5dB Max @900KHz-7.9MHz
 Attenuation: 15dB Min @18MHz & 40MHz
 Return Loss: 12dB Min @900KHz-4MHz
 Stopband: 20-150KHz
 Attenuation @60dB Min

XFMRS INC.
 www.XFMRS.com

Title:
 BANDPASS FILTER

UNLESS OTHERWISE SPECIFIED
 TOLERANCES:
 .xxx ± 0.010
 Dimensions in Inch
 SHT 1 OF 1

P/N:	XF4014	REV. A
DWN.	廖玉坤	Oct-12-06
CHK.	李清儿	Oct-12-06
APP.	MS	Oct-12-06

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

DOC. REV: A/7