


Brass housing
Black chrome finish

Stainless steel mesh

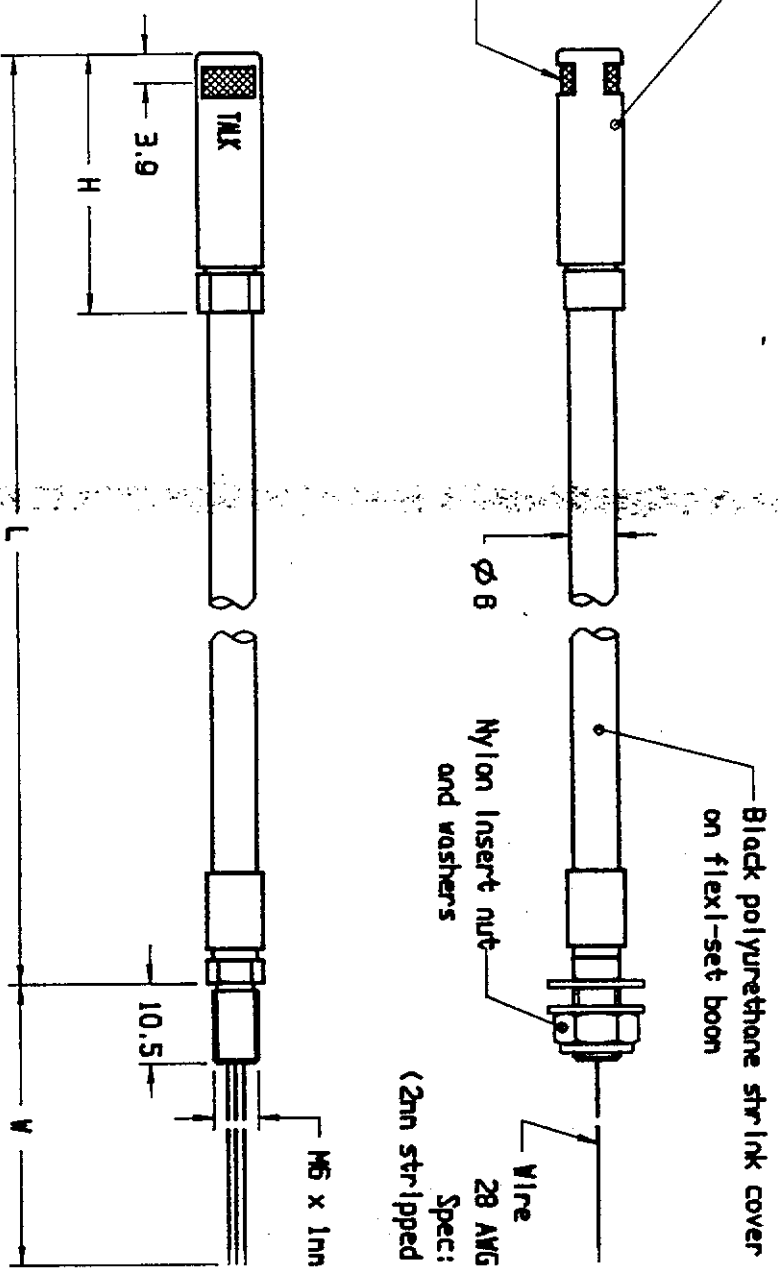

Model	Dimension			Wire colour			Weight grams
	L	H	V	+ve	output	-ve	
3225	164	19.7	150	Red	Red	Black	Green
3524	185	34.1	150	White	White	White	Green
3525	193	19.7	150	Red	Black	Black	Green
3529	150	19.7	150	Red	Black	Black	Green
3531	193	19.7	150	Red	Black	Black	Green

DIMENSIONS IN MILLIMETERS

KNOWLES ELECTRONICS

KNOWLES ELECTRONICS, INC., ITASCA, ILLINOIS U.S.A.
KNOWLES ELECTRONICS, CO., BURGESS HILL, SUSSEX, ENGLAND

FB-00
SHT 1.1

ISSUE
B

SCALE: 1 : 1


DO NOT SCALE DRAWING

TITLE: **Boon microphone**
Outline drawing

FB-00
SHT 1.1

DR. BY	DATE
DMP	1-Dec-94
CR. BY	DATE
SPK	1.7.94
APP. BY	DATE
R. J. W.	1.7.94

SENSITIVITY IN dB RELATIVE TO 1.0 VOLT/0.1 Pa (N/M)²
FOR CONDITIONS NOTED BELOW.

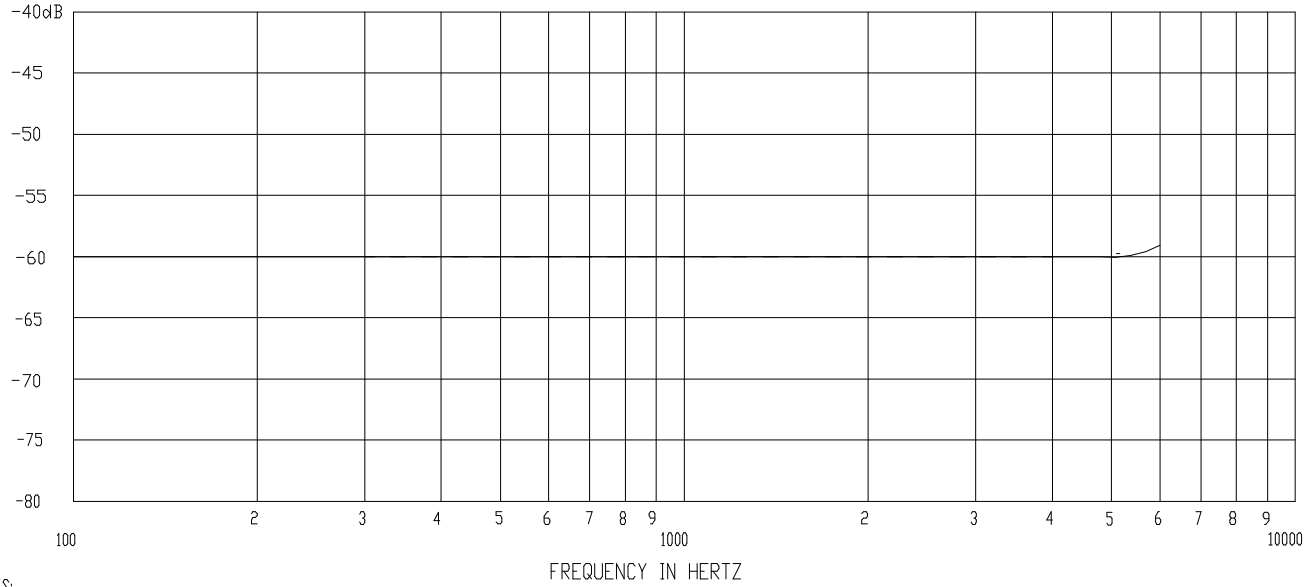


NOTES:

1. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
2. SENSITIVITY VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.


SENSITIVITY

FREQUENCY	MIN.	NOM.	MAX.
300	-64.0	-60.0	-56.0
1000	-63.0	-60.0	-57.0
4000	-64.0	-60.0	-56.0

4. TEST CONDITIONS:
HEAD OF BOOM EXPOSED TO 94 dB SPL SWEPT SOUND FIELD AT 6mm FROM VOICE APERTURE.
ARTIFICIAL VOICE:
B & K 4227 MOUTH SIMULATOR.



5. FOR MICROPHONE CAPSULE SPEC. SEE DRG. NR-PC Sht 2.1

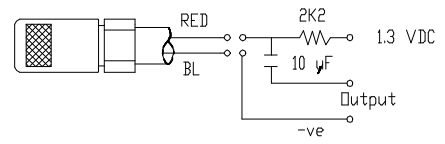

Lead identification
& test circuit

Model No.
FB-3225
FB-3531
FB-3533
FB-3534
FB-8515
FB-5522

ISSUE

B

KNOWLES ELECTRONICS

KNOWLES ELECTRONICS, INC., ITASCA, ILLINOIS U.S.A.

KNOWLES ELECTRONICS, CO., BURGESS HILL, SUSSEX, ENGLAND

When test limits are used to establish incoming inspection acceptance/rejection criteria, correlation of test equipment with Knowles is also required for elimination of equipment and test method variations.

C

TITLE: BOOM MICROPHONE
PERFORMANCE SPECIFICATION

FB-PC
SHT 2.1

DR. BY	DATE
RW	2-Nov-95
CK. BY	DATE
SRK	1-Jul-96
APP. BY	DATE
RJW	1-Jul-96