

Addendum

HC908JB16AD/D
Rev. 1, 8/2002

Addendum to
MC68HC908JB16
Technical Data

This addendum provides update and additional information to the
MC68HC908JB16 Technical Data, Rev. 1
(Motorola document number MC68HC908JB16/D),

pertaining to the following:

- MC68HC908JB16
 - Update to V_{REG} LVI trip point
 - 20-pin SOIC package
- MC68HC908JB12
- MC68HC08JB16

MC68HC908JB16

This section updates data sheet information and introduces the 20-pin SOIC package for the MC68HC908JB16.

V_{REG} LVI Trip Point Page 318, entry for minimum V_{REG} LVI trip point voltage has been updated.

From:

Characteristic	Symbol	Min	Typ	Max	Unit
V_{REG} LVI trip point voltage	V_{LVR}	2.0	2.2	2.6	V


To:

V_{REG} LVI trip point voltage	V_{LVR}	1.9	2.2	2.6	V
----------------------------------	-----------	-----	-----	-----	---



20-Pin SOIC

Order Number: **MC68HC908JB16JDW**

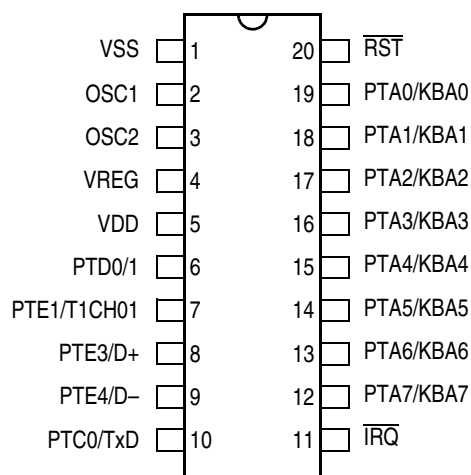


Pins not available on 20-pin package:		
PTC1/RxD	PTE0/TCLK	PTD2
	PTE2/T2CH01	PTD3
CGMXFC1	CGMXFC2	PTD4
CGMOUT1	CGMOUT2	PTD5
VREGA0	VREGA1	
VSSA0	VSSA1	VDDA

Internal pads are unconnected.

PTD0/1 pin: PTD0 and PTD1 internal pads are bonded together to PTD0/1 pin, and has 50 mA sink capability when configured as an output. Pin direction must be configured such that DDRD0 = DDRD1.

Figure 1. 20-Pin SOIC Pin Assignment

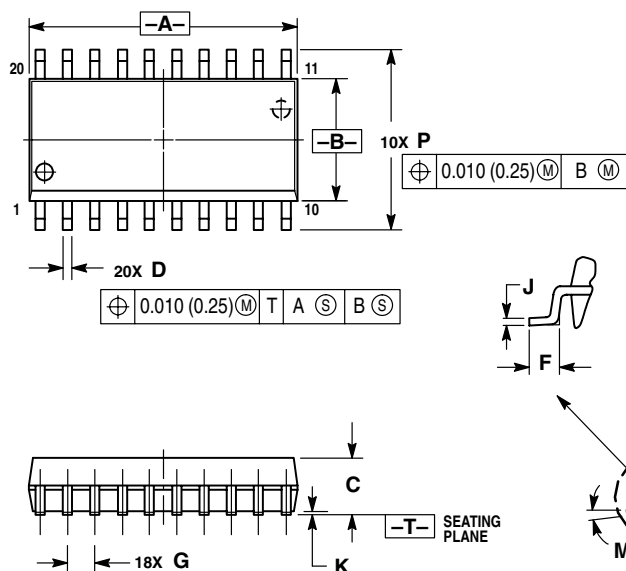

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETER.
 3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
 4. MAXIMUM MOLD PROTRUSION 0.150 (0.006) PER SIDE.
 5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	12.65	12.95	0.499	0.510
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.50	0.90	0.020	0.035
G	1.27 BSC		0.050 BSC	
J	0.25	0.32	0.010	0.012
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	10.05	10.55	0.395	0.415
R	0.25	0.75	0.010	0.029

Figure 2. 20-Pin SOIC Mechanical Dimensions (Case No. 751D)

MC68HC908JB12

This section introduces the MC68HC908JB12, a derivative of the MC68HC908JB16. The entire MC68HC908JB16 data book, including the updates in this addendum, applies to this device, with exceptions outlined below.

Table 1. Summary of MC68HC908JB12 and MC68HC908JB16 Differences

	MC68HC908JB12	MC68HC908JB16
FLASH Memory	12,288 bytes (\$CA00–\$F9FF)	16,384 bytes (\$BA00–\$F9FF)
Dual Clock Generator Module	Not implemented. \$0051–\$0059 unimplemented.	Available in 32-pin LQFP only.
Available Packages⁽¹⁾	— 28-pin SOIC 20-pin SOIC	32-pin LQFP 28-pin SOIC 20-pin SOIC


Notes:

1. The pin assignments are identical for both devices; see data sheet.

MCU Block Diagram **Figure 3** shows the structure of the MC68HC908JB12.

Memory Map **Figure 4** shows the memory map of the MC68HC908JB12.

Dual Clock Generator Module The dual 27-MHz clock generator module on the MC68HC908JB16 is not designed in the MC68HC908JB12, hence, register locations from \$0051 to \$0059 are unimplemented. Information in the data book relating to the CGM do not apply to the MC68HC908JB12.

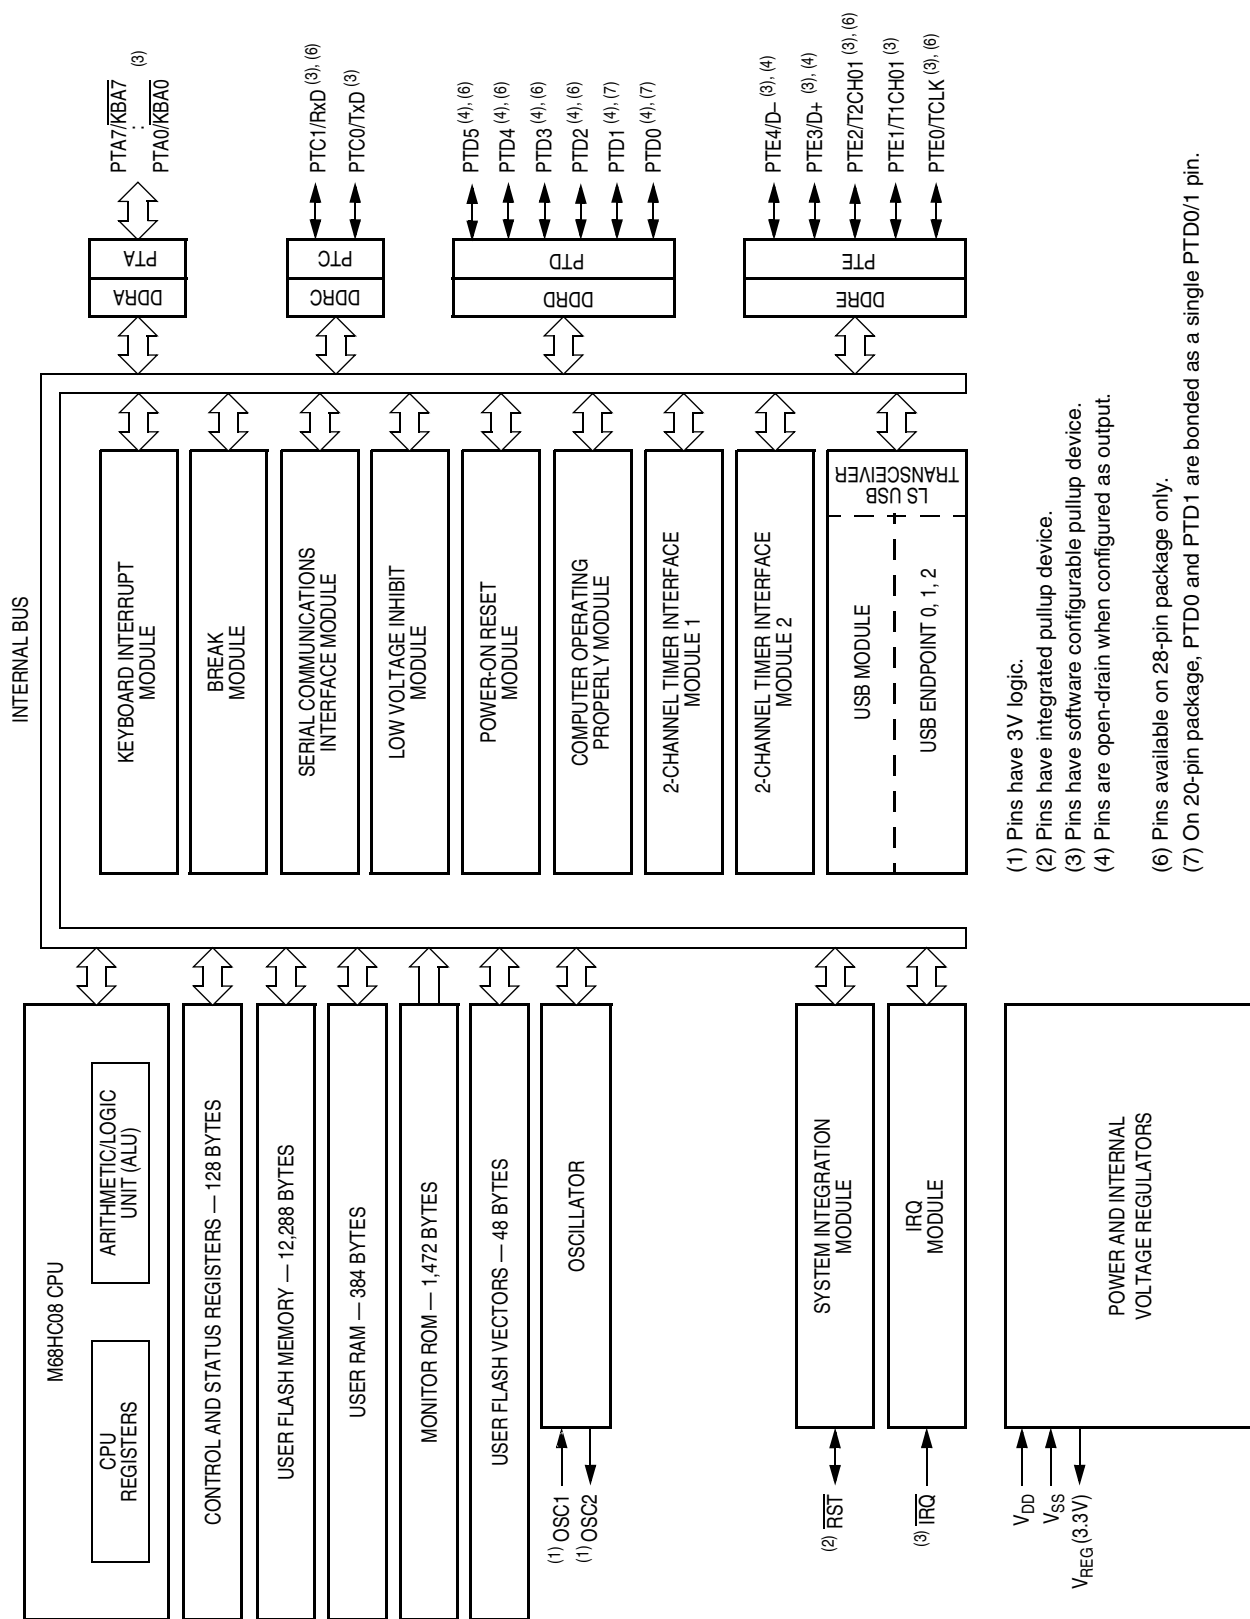

- (1) Pins have 3V logic.
- (2) Pins have integrated pullup device.
- (3) Pins have software configurable pullup device.
- (4) Pins are open-drain when configured as output.
- (6) Pins available on 28-pin package only.
- (7) On 20-pin package, PTD0 and PTD1 are bonded as a single PTD0/1 pin.

Figure 3. MC68HC908JB12 Block Diagram

\$0000 ↓ \$007F	I/O Registers 128 Bytes
\$0080 ↓ \$01FF	RAM 384 Bytes
\$0200 ↓ \$C9FF	Unimplemented 51,200 Bytes
\$CA00 ↓ \$F9FF	FLASH Memory 12,288 Bytes
\$FA00 ↓ \$FDFF	Monitor ROM 1 1,024 Bytes
\$FE00	SIM Break Status Register (SBSR)
\$FE01	SIM Reset Status Register (SRSR)
\$FE02	Reserved
\$FE03	SIM Break Flag Control Register (SBFCR)
\$FE04	Interrupt Status Register 1 (INT1)
\$FE05	Interrupt Status Register 2 (INT2)
\$FE06	Reserved
\$FE07	Reserved
\$FE08	FLASH Control Register (FLCR)
\$FE09	FLASH Block Protect Register (FLBPR)
\$FE0A	Reserved
\$FE0B	Reserved
\$FE0C	Break Address Register High (BRKH)
\$FE0D	Break Address Register Low (BRKL)
\$FE0E	Break Status and Control Register (BRKSCR)
\$FE0F	Reserved
\$FE10 ↓ \$FFCF	Monitor ROM 2 448 Bytes
\$FFD0 ↓ \$FFFF	FLASH Vectors 48 Bytes

Figure 4. MC68HC908JB12 Memory Map

Pullup on PTE3/D+ and PTE4/D– Pins

On the MC68HC908JB12, control over the pullup devices on PTE3/D+ and PTE4/D– pins are shown in [Table 2](#).

Table 2. Pullup Control on PTE3/D+ and PTE4/D– Pins

PULLEN (\$001A)	USBEN (\$0038)	PTExP (\$001D)	PTE4IE (\$001C)	PTE3/D+ pin	PTE4/D– pin
0	0	0	0	—	—
0	0	1	0	5kΩ pullup to V _{DD}	5kΩ pullup to V _{DD}
0	0	0	1	—	5kΩ pullup to V _{DD} ⁽¹⁾
0	0	1	1	5kΩ pullup to V _{DD}	5kΩ pullup to V _{DD} ⁽¹⁾
0	1	X	X	—	—
1	1	X	X	—	1.5kΩ pullup to V _{REG}
1	0	X	0	—	1.5kΩ pullup to V _{REG}
1	0	X	1	Do not set this configuration.	

Notes:

1. External interrupt function is also enabled on PTE4/D– pin.

Electrical Specifications

Electrical specifications for the MC68HC908JB16 apply to the MC68HC908JB12, except for the USB reset timing:

Bus State	Signaling Levels	
	Transmit	Receive
Reset	NA	D+ and D– < V _{IL} (max) for ≥ 8μs (MC68HC908JB16) D+ and D– < V _{IL} (max) for ≥ 125μs (MC68HC908JB12)

Order Numbers

These are MC order numbers for MC68HC908JB12.

Table 3. MC68HC908JB12 Order Numbers

MC Order Number	Package	Operating Temperature Range
MC68HC908JB12JDW	20-pin SOIC	0 °C to +70 °C
MC68HC908JB12DW	28-pin SOIC	0 °C to +70 °C

MC68HC08JB16

This section introduces the MC68HC08JB16, the ROM part equivalent to the MC68HC908JB16. The entire MC68HC908JB16 data book applies to this ROM device, with exceptions outlined below.

Table 4. Summary of MC68HC08JB16 and MC68HC908JB16 Differences

	MC68HC08JB16	MC68HC908JB16
Memory (\$BA00–\$F9FF)	16,384 bytes ROM	16,384 bytes FLASH
User vectors (\$FFD0–\$FFFF)	48 bytes ROM	48 bytes FLASH
Registers at \$FE08 and \$FE09	Not used; locations are reserved	FLASH related registers. \$FE08 — FLCR \$FE09 — FLBPR
Monitor ROM 1 (\$FA00–\$FDFF)	Unimplemented	Used for testing and FLASH programming/erasing.
Monitor ROM 2 (\$FE10–\$FFCF)	Used for testing purposes only.	
Dual Clock Generator Module	Currently not available.	Available in 32-pin LQFP only.
Available Packages⁽¹⁾	32-pin LQFP currently not available. 28-pin SOIC 20-pin SOIC	32-pin LQFP 28-pin SOIC 20-pin SOIC

Notes:

1. The pin assignments are identical for both devices; see data sheet.

MCU Block Diagram **Figure 5** shows the block diagram of the MC68HC08JB16.

Memory Map **Figure 6** shows the memory map of the MC68HC08JB16.

Reserved Registers The two registers at \$FE08 and \$FF09 are reserved locations on the MC68HC08JB16.

On the MC68HC908JB16, these two locations are the FLASH control register and the FLASH block protect register respectively.

Monitor ROM The monitor program (monitor ROM, \$FE10–\$FFCF) on the MC68HC08JB16 is for device testing only.

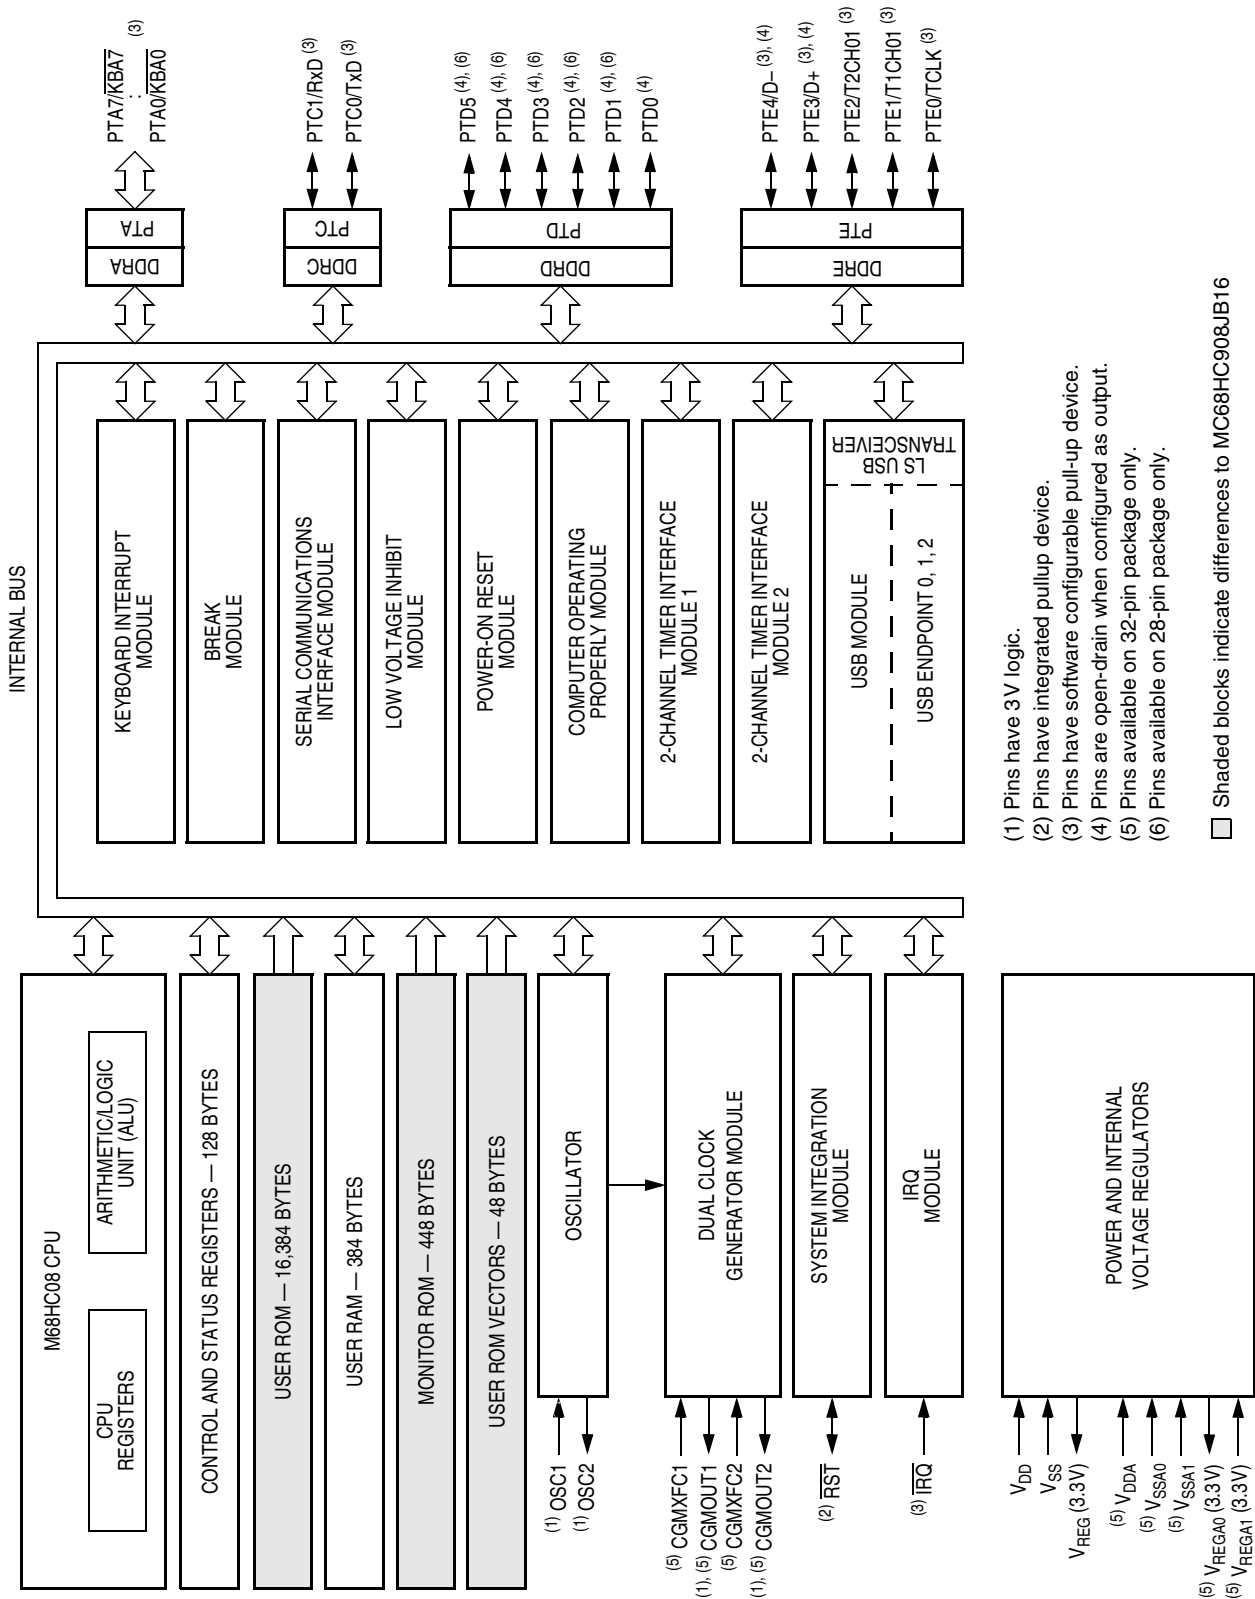


Figure 5. MC68HC908JB16 Block Diagram

\$0000 ↓ \$007F	I/O Registers 128 Bytes
\$0080 ↓ \$01FF	RAM 384 Bytes
\$0200 ↓ \$B9FF	Unimplemented 47,104 Bytes
\$BA00 ↓ \$F9FF	ROM 16,384 Bytes
\$FA00 ↓ \$FDFF	Unimplemented 1,024 Bytes
\$FE00	SIM Break Status Register (SBSR)
\$FE01	SIM Reset Status Register (SRSR)
\$FE02	Reserved
\$FE03	SIM Break Flag Control Register (SBFCR)
\$FE04	Interrupt Status Register 1 (INT1)
\$FE05	Interrupt Status Register 2 (INT2)
\$FE06	Reserved
\$FE07	Reserved
\$FE08	Reserved
\$FE09	Reserved
\$FE0A	Reserved
\$FE0B	Reserved
\$FE0C	Break Address Register High (BRKH)
\$FE0D	Break Address Register Low (BRKL)
\$FE0E	Break Status and Control Register (BRKSCR)
\$FE0F	Reserved
\$FE10 ↓ \$FFCF	Monitor ROM 448 Bytes
\$FFD0 ↓ \$FFFF	ROM Vectors 48 Bytes

Figure 6. MC68HC08JB16 Memory Map

**Electrical
Specifications**

Electrical specifications for the MC68HC908JB16 apply to the MC68HC08JB16, except for the following:

*FLASH Memory
Characteristics*

The FLASH memory electrical characteristics do not apply to the MC68HC08JB16 ROM device.

**ROM MC Order
Numbers**

These part numbers are generic numbers only. To place an order, ROM code must be submitted to the ROM Processing Center (RPC).

Table 5. ROM MC Order Numbers

MC Order Number	Package	Operating Temperature Range
MC68HC08JB16JDW	20-pin SOIC	0 °C to +70 °C
MC68HC08JB16DW	28-pin SOIC	0 °C to +70 °C

NOTES

Home Page:

www.freescal.com

email:

support@freescal.com

USA/Europe or Locations Not Listed:

Freescal Semiconductor
Technical Information Center, CH370
1300 N. Alma School Road
Chandler, Arizona 85224
(800) 521-6274
480-768-2130
support@freescal.com

Europe, Middle East, and Africa:

Freescal Halbleiter Deutschland GmbH
Technical Information Center
Schatzbogen 7
81829 Muenchen, Germany
+44 1296 380 456 (English)
+46 8 52200080 (English)
+49 89 92103 559 (German)
+33 1 69 35 48 48 (French)
support@freescal.com

Japan:

Freescal Semiconductor Japan Ltd.
Headquarters
ARCO Tower 15F
1-8-1, Shimo-Meguro, Meguro-ku
Tokyo 153-0064, Japan
0120 191014
+81 2666 8080
support.japan@freescal.com

Asia/Pacific:

Freescal Semiconductor Hong Kong Ltd.
Technical Information Center
2 Dai King Street
Tai Po Industrial Estate,
Tai Po, N.T., Hong Kong
+800 2666 8080
support.asia@freescal.com

For Literature Requests Only:

Freescal Semiconductor
Literature Distribution Center
P.O. Box 5405
Denver, Colorado 80217
(800) 441-2447
303-675-2140
Fax: 303-675-2150
LDCForFreescalSemiconductor@hibbertgroup.com

RoHS-compliant and/or Pb- free versions of Freescal products have the functionality and electrical characteristics of their non-RoHS-compliant and/or non-Pb- free counterparts. For further information, see <http://www.freescal.com> or contact your Freescal sales representative.

For information on Freescal.s Environmental Products program, go to <http://www.freescal.com/epp>.

Information in this document is provided solely to enable system and software implementers to use Freescal Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document. Freescal Semiconductor reserves the right to make changes without further notice to any products herein. Freescal Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescal Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Freescal Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Freescal Semiconductor does not convey any license under its patent rights nor the rights of others. Freescal Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescal Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescal Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescal Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescal Semiconductor was negligent regarding the design or manufacture of the part.



HC908JB16AD/D
Rev. 1
8/2003

**For More Information On This Product,
Go to: www.freescal.com**