




SPECIFICATIONS

SWITCH TYPE: TRANSFER
 CONNECTOR TYPE: SMA
 FREQUENCY RANGE: DC TO 18 GHz
 FEATURE: FAILSAFE
 VOLTAGE RANGE: 24-32 Vdc
 AVERAGE POWER: 35 WATTS, MAXIMUM
 ACTUATING CURRENT (mA MAXIMUM): 227 @ 28 Vdc & 25°C
 VSWR: 1.50:1, MAXIMUM
 INSERTION LOSS: .50 dB, MAXIMUM
 ISOLATION: 60 dB, MINIMUM
 NOMINAL IMPEDANCE: 50 OHM
 OPERATING TEMPERATURE: -40°C +85°C

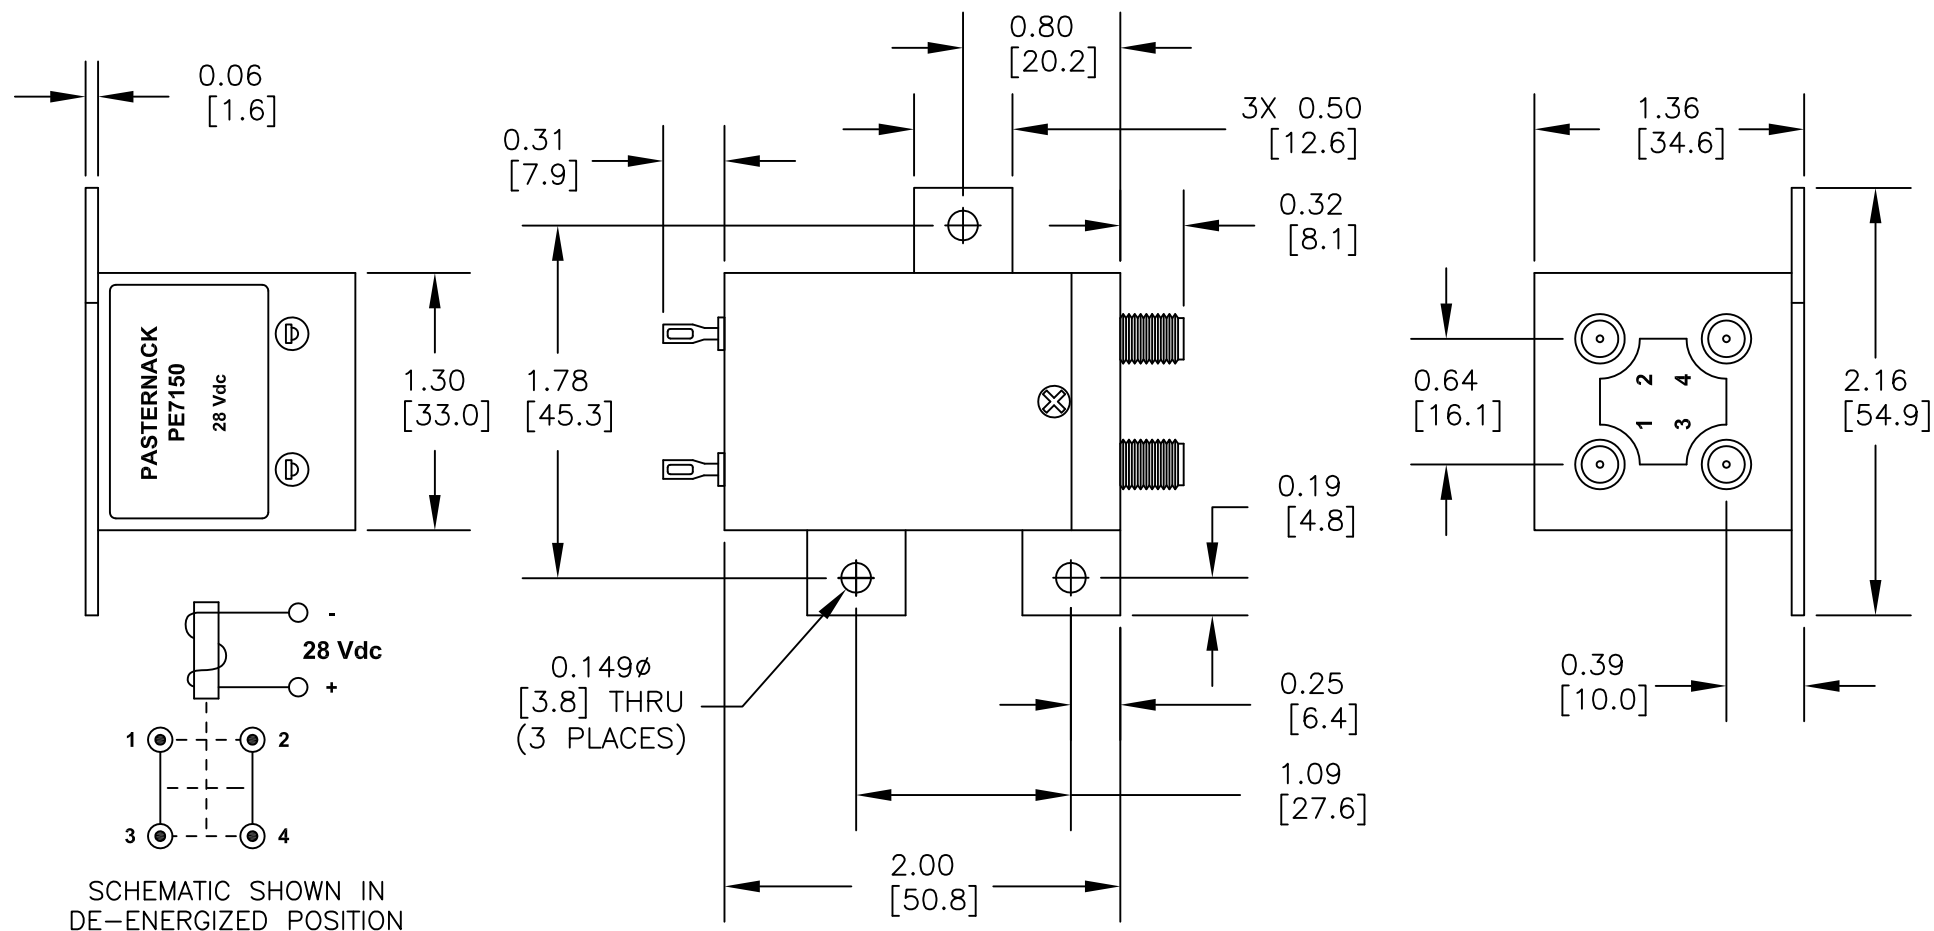

PASTERNACK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE

PE7150

DES. SMA TRANSFER RELAY SWITCH, FAILSAFE

REV. B

FSCM NO. 53919

CAD FILE 042412

SCALE N/A

SIZE A

2231

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].