




Price\*\* : 1,548.00 USD

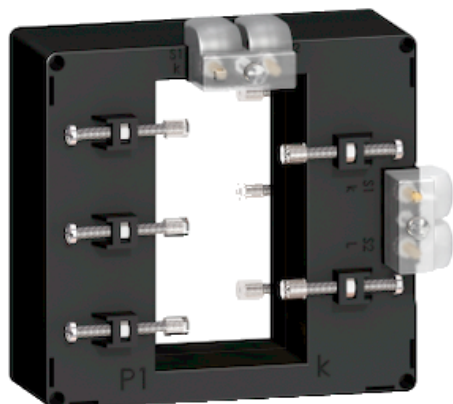

### Main

|                           |                                  |
|---------------------------|----------------------------------|
| Range                     | PowerLogic                       |
| Product name              | CT                               |
| Product or component type | Current transformer              |
| Secondary current         | 5 A                              |
| Accuracy class            | Class 0.5 15 VA<br>Class 1 20 VA |
| Line Rated Current        | 1250 A                           |

### Complementary

|                                             |                                                    |
|---------------------------------------------|----------------------------------------------------|
| Current transformer type                    | Tropicalised for busbar                            |
| Current transformer ratio                   | 1250/5                                             |
| [Ith] conventional free air thermal current | 60 kA                                              |
| Dynamic withstand current                   | 2.5 Ith                                            |
| Maximum safety factor                       | 5                                                  |
| [Ue] rated operational voltage              | < 720 V AC 50/60 Hz                                |
| [Ui] rated insulation voltage               | 3 kV                                               |
| Mounting mode                               | Insulated locking screw                            |
| Mounting support                            | Busbar                                             |
| Width                                       | Inner 2.17 in (55 mm)<br>Outside 5.31 in (135 mm)  |
| Height                                      | Outside 5.08 in (129 mm)<br>Inner 4.06 in (103 mm) |
| Depth                                       | Frame 1.97 in (50 mm)<br>Total 3.35 in (85 mm)     |
| Net weight                                  | 1.46 lb(US) (0.662 kg)                             |
| [Uimp] rated impulse withstand voltage      | 3 kV                                               |

|                             |          |
|-----------------------------|----------|
| Electrical insulation class | Class B  |
| Opening of bars             | 102 x 54 |
| Sealing                     | With     |

## Environment

|                                       |                            |
|---------------------------------------|----------------------------|
| Standards                             | IEC 61869-2<br>VDE 0414    |
| Product certifications                | CE                         |
| IP degree of protection               | IP20                       |
| Relative humidity                     | 0...95 %                   |
| Ambient air temperature for operation | -13...122 °F (-25...50 °C) |

## Ordering and shipping details

|                   |                                |
|-------------------|--------------------------------|
| Category          | 01290 - MASTERPACT ACCESSORIES |
| Discount Schedule | DE2F                           |
| GTIN              | 03606480618949                 |
| Returnability     | No                             |
| Country of origin | TN                             |

## Offer Sustainability

|                          |                                                                                                                              |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status | Green Premium product                                                                                                        |
| REACH free of SVHC       | Yes                                                                                                                          |
| EU RoHS Directive        | Compliant<br><a href="#">EU RoHS Declaration</a>                                                                             |
| China RoHS Regulation    | <a href="#">China RoHS declaration</a><br>Product out of China RoHS scope. Substance declaration for your information.       |
| Environmental Disclosure | <a href="#">Product Environmental Profile</a>                                                                                |
| Circularity Profile      | <a href="#">End of Life Information</a>                                                                                      |
| WEEE                     | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |