
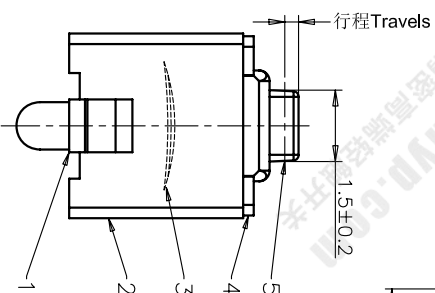


RECOMMENDED P.C.B. LAYOUT

安装尺寸图

规格 Specifications

额定负荷 Rating	DC 12V/50mA	
接触电阻 Contact Resistance	100mΩ max.	
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.	
抗电强度 Dielectric strength	AC250V(50-60HZ) 60S min.	
操作力 Operation force	≤180±30gf	≤300±50gf
寿命试验 Operating Life	50,000 cycles	30,000 cycles
行程 Travels	0.25±0.1mm	

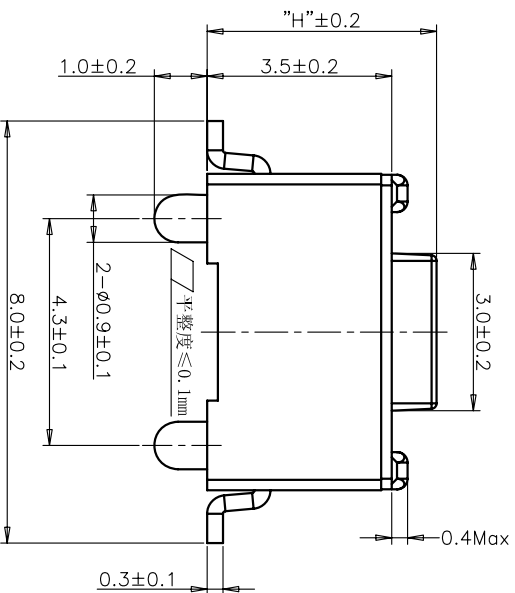

PRODUCT NO.: 1TS002\*\*\*\*\*-CT

轻触开关  
3X6系列  
外形:  
A=插脚  
B=贴片  
C=贴片带柱  
E=贴片2.5高  
K=贴片带柱8.8  
L=贴片10.2

按钮颜色:  
底座颜色:  
盖板颜色:

操作力度:

手感:

产品高度(H):

材料:

编织带  
非编织带, 不启用

初始颜色  
则不启用

130=130±20gf  
160=160±30gf  
180=180±30gf  
220=220±40gf  
250=250±50gf  
300=300±50gf

0=常规  
1=大手感  
2=小手感  
3=特殊手感

430=4.3mm  
500=5.0mm

0=PA66  
1=LCP+PPA  
2=LCP  
3=PA66+PPA  
4=新增材质  
依次增加

5 ACTUATOR PA66 WHITE

4 COVER STAINLESS STEEL NATURAL

3 DOME STAINLESS STEEL Ag-PLATED

2 HOUSING PA66 WHITE

1 TERMINAL BRASS Ag-PLATED/0.2µm

ITEM PART NAME QUANTITY MATERIAL FINISH

NAME(INTENDED USE)  
3X6 SMT SERIES(POST)  
TACT SWITCH

HON YUAN  
HON YUAN PRECISION IND. CO.,LTD.  
SHENZHEN, CHINA.

TITLE:  
PRODUCT DRAWING

APPD: ZO 2015/11/12  
CHKD: M.H.LI 2015/11/12  
DR: WP.LU 2015/11/11

DWG NO.: 1TS002C

SCALE 10/1

SHEET 1/4

REV. D

X. ± 0.3	X' ± 3'	UNITS	MM
.X ± 0.2	X' ± 2'	MATL	
.XX ± 0.1	.XX' ± 1'	FINISH	
.XXX ± 0.05	.XXX' ± 0.5'	Q'TY	

THESE DIMENSIONS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT PERMISSION FROM HON YUAN PRECISION IND. CO., LTD.