




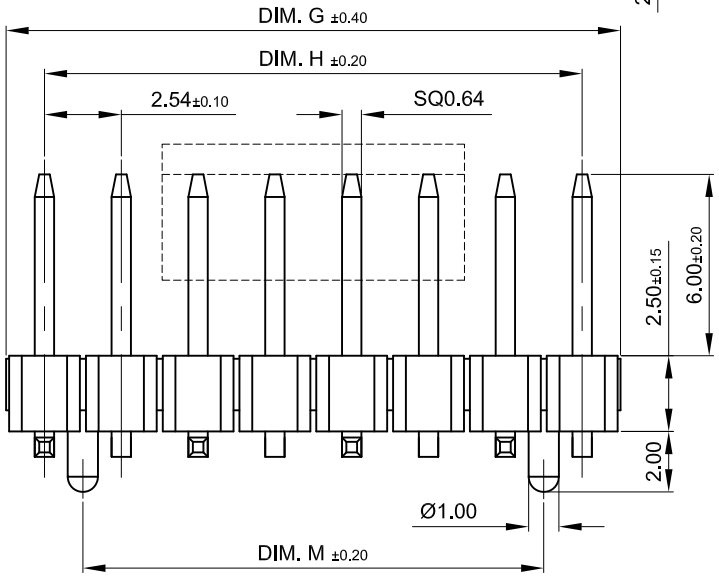


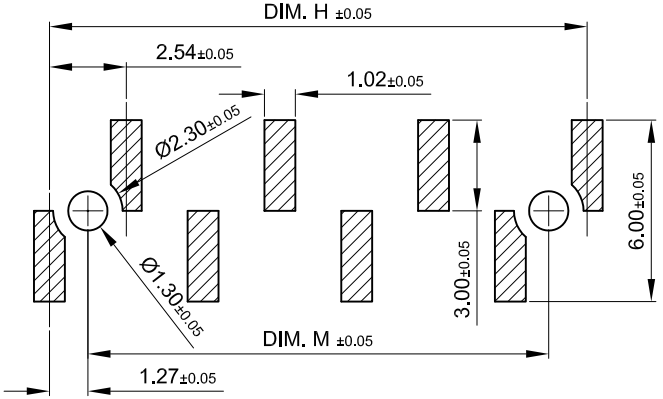

PCB Layout

Tape & Reel packaging (with Pick and Place Cap) 300pcs per reel

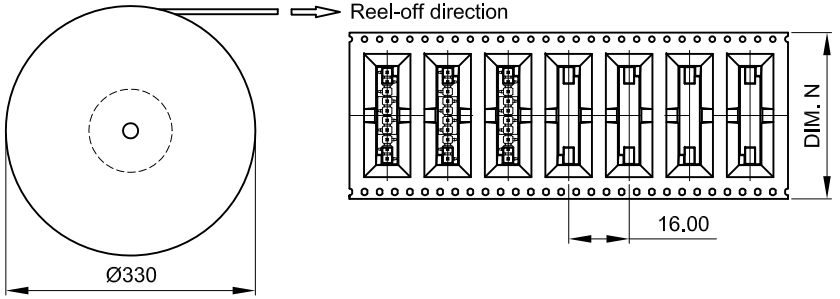

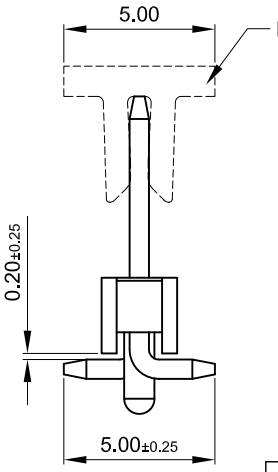

Pick and Place Cap for tape and reel packaging

Notes:

Material and finish:
Contact: Brass
Gold over 30~80u" nickel plating
Insulation: PA9T UL94-V0, color black

Specifications:
Current rating: 3.0A
Contact resistance: 20mΩ Max.
Withstanding Voltage: 1000V AC/DC
Insulation resistance: 1000MΩ Min.
Operating temperature: -40°C to +105°C

Tube Packaging Q'ty

No. of positions	Q'ty per tube
14	16
12	19
10	22
8	28
6	38
4	57
2	114

Id-Nr. Tape&Reel 10u" gold plating	Id-Nr. Tube 10u" gold plating	Id-Nr. Tape&Reel 0.8u" gold plating	Id-Nr. Tube 0.8u" gold plating	No of Pos.	DIM. G	DIM. H	DIM. M	DIM. N	DIM. P
129160	129153	129146	129139	14	35.56	33.02	30.48	56	10.00
129159	129152	129145	129138	12	30.48	27.94	25.40	56	10.00
129158	129151	129144	129137	10	25.40	22.86	20.32	44	10.00
129157	129150	129143	129136	8	20.32	17.78	15.24	44	10.00
129156	129149	129142	129135	6	15.24	12.70	10.16	44	10.00
129155	129148	129141	129134	4	10.16	7.62	5.08	32	10.00
129154	129147	129140	129133	2	5.08	2.54	0.00	24	7.00

Information:

Tolerances
X. ±0.50 X°. ±10°
X.X ±0.40 X.X° ±5°
X.XX ±0.25 X.XX° ±3°

All Dimensions in mm

Scale 4:1

For further information about I. D. number see manufacturing document

All rights reserved. Only for information. To insure that this is the latest version of this drawing, contact one of the ERNI companies before using

Subject to modification without prior notice. Drawing will not be updated.

Designation
2.54mm Vertical Single Row Header SMT with Locating Pegs

ERNI Asia Holding
www.erni.com

129132

Rev.	Date	
A	13-08-2013	129132.DWG