

1. Mechanical Dimensions:

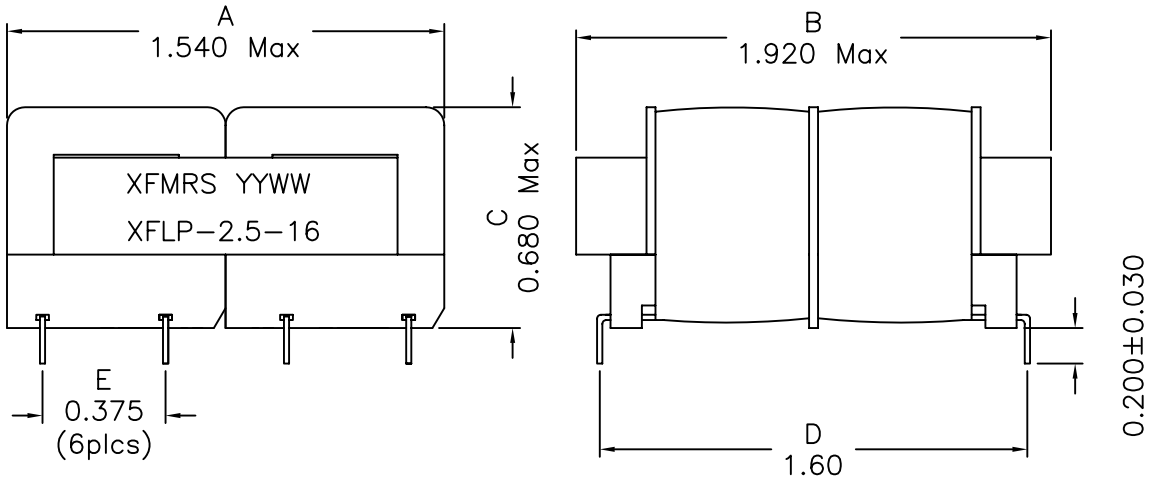

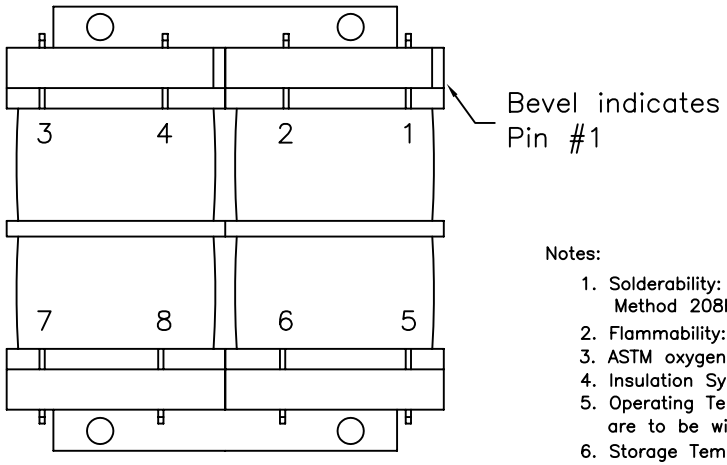

(BOTTOM VIEW)


*Pin Numbers are shown for ref only.

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/1

2. Schematic:

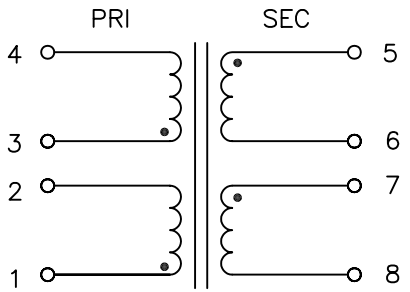

3. Electrical Specifications:

Primary: Pins 1-2/3-4 115/230V 50/60Hz
Ouput: 16V @ 0.15A Series
Output: 8V @ 0.3A Parallel
DCR: Pins 1-2 756 Ohms ±15%
DCR: Pins 3-4 756 Ohms ±15%
DCR: Pins 5-6 6.56 Ohms ±15%
DCR: Pins 7-8 6.56 Ohms ±15%
HIPOT: 2000Vrms, PRI to SEC, All Wdgs to Core

XFMRS Inc	Title: 2.5VA TRANSFORMER		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx±0.010 Dimensions in Inches	P/N: XFLP-2.5-16		REV. A
	DWN.	Juan Mao	Feb-02-09
	CHK.	YK Liao	Feb-02-09
SHT 1 OF 1	APP.	BW	Feb-02-09

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.