
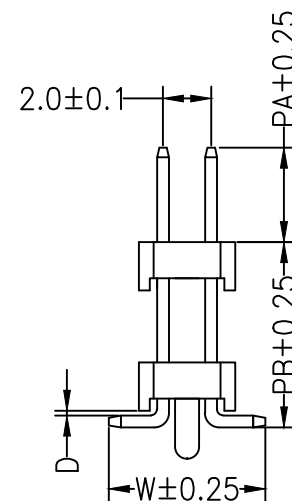
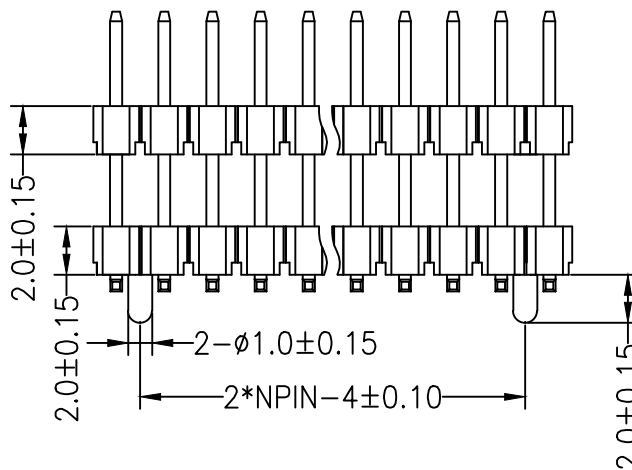
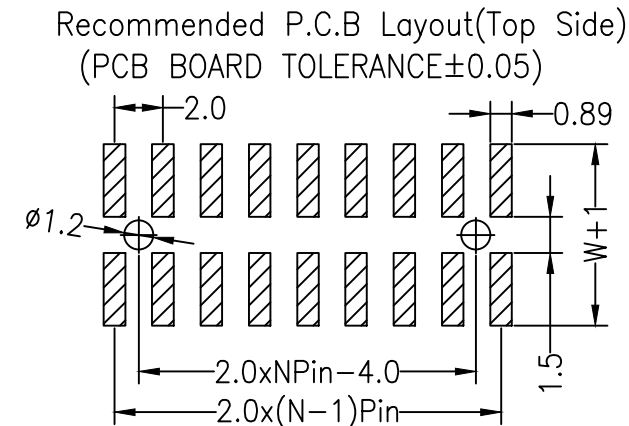


RoHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

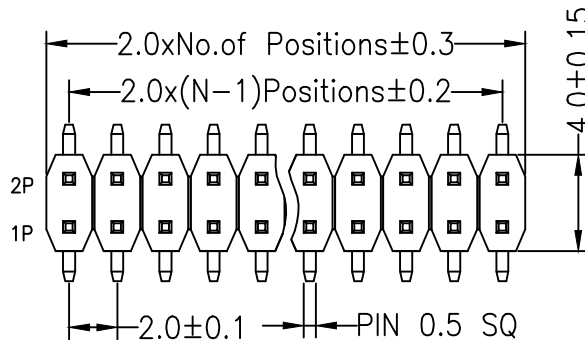

W= With Post

Dimension antitheses list					
ITEM	PA	D	PB	W	L
Alternate	5.30	0.00	11.20	6.50	18.20
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	SCALE	FIT
				DIM	TOL			
A0	2012.04.11	NEW DRAWING		X.X	±0.30	CHECK	UNIT	mm
				X.XX	±0.20			SIZE
				X.XXX	±0.10	APPROVE	SHEET	1/1
				Angle	±3°			PROJ.

深圳市连盛精密连接器有限公司

PART NO.	PH-00994
TITLE:	2.0PH 双塑 2x11pin SMT 带柱