

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Potential distributors, with option to supply up to 6 mm², nom. voltage: 250 V, nominal current: 17.5 A, connection method: Push-in connection, Rated cross section: 1.5 mm², cross section: 0.14 mm² - 2.5 mm², Feed-in stage, Rated cross section: 4 mm², cross section: 0.2 mm² - 6 mm², mounting: NS 35/7,5, NS 35/15, color: gray, color of connection elements: blue

Your advantages

- High contact quality thanks to push-in technology as a replacement for Wire-Wrap®, TERMI-POINT®, etc.
- Bridgeable potential distributor with option to supply up to 6 mm²
- Tool-free wiring in a confined space thanks to compact size
- Distributor terminal block in blue for 24 V DC power supplies

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

Commercial Data

Item number	3270225
Packing unit	1 pc
Minimum order quantity	10 pc
Sales Key	B02
Product Key	BE6211
Catalog Page	Page 52 (C-1-2019)
GTIN	4055626239767
Weight per Piece (including packing)	46.77 g
Weight per Piece (excluding packing)	46.77 g
Customs tariff number	85369010
Country of origin	PL

Technical Data

Product properties

Product type	Potential distributor
Number of positions	2
Number of connections	29
Number of rows	8
Potentials	1

Insulation characteristics

Overvoltage category	III
----------------------	-----

Electrical properties

Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	0.56 W

Connection data

Service Entrance	yes
Number of connections per level	4
Nominal cross section	1.5 mm ²

Level 1+2+3+4+5+6 above 1

Stripping length	8 mm ... 10 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section solid	0.14 mm ² ... 2.5 mm ²
Cross section AWG	26 ... 14
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section, flexible [AWG]	26 ... 14
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.14 mm ² ... 1.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 1.5 mm ²
Nominal current	17.5 A (with 1.5 mm ² conductor cross section)
Maximum load current	24 A (per chamber with 2.5 mm ² conductor cross section)
Maximum total current	37 A (per potential distributor)
Nominal voltage	250 V
Nominal cross section	1.5 mm ²

Feed-in stage

Note	Only the "CRIMPFOX 6" crimping pliers may be used for crimping with 6 mm ² stranded and ferrule.
Stripping length	10 mm ... 12 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section solid	0.2 mm ² ... 6 mm ²
Cross section AWG	24 ... 10
Conductor cross section flexible	0.2 mm ² ... 6 mm ²

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

Conductor cross section, flexible [AWG]	24 ... 10
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.2 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.2 mm ² ... 6 mm ²
Nominal current	32 A (Supply, for 4 mm ² conductor cross section)
Maximum load current	37 A (Service Entrance)
Nominal voltage	250 V
Nominal cross section	4 mm ²

Level 1+2+3+4+5+6 above 1 Connection cross sections directly pluggable

Conductor cross section solid	0.34 mm ² ... 2.5 mm ²
Conductor cross section, solid [AWG]	20 ... 14
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.34 mm ² ... 1.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.34 mm ² ... 1.5 mm ²

Feed-in stage Connection cross sections directly pluggable

Conductor cross section solid	0.34 mm ² ... 6 mm ²
Conductor cross section, solid [AWG]	24 ... 10
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.34 mm ² ... 6 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.34 mm ² ... 6 mm ²

Dimensions

Width	8.3 mm
Height NS 35/15	95 mm
Height NS 35/7,5	87.5 mm
Length	100 mm

Material specifications

Color	gray
Color of connection elements	blue
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed

3270225

<https://www.phoenixcontact.com/us/products/3270225>

Smoke gas toxicity NFPA 130 (SMP 800C)	passed
--	--------

Electrical tests

Surge voltage test

Test voltage setpoint	4.8 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 1.5 mm ²	0.18 kA
Short-time withstand current 2.5 mm ²	0.3 kA
Short-time withstand current 4 mm ²	0.48 kA
Short-time withstand current 6 mm ²	0.72 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.5 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 35
Test force setpoint	1 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.14 mm ² / 0.2 kg
	1.5 mm ² / 0.4 kg
	2.5 mm ² / 0.7 kg
Result	Test passed

Environmental and real-life conditions

Aging

Temperature cycles	192
--------------------	-----

Result	Test passed
--------	-------------

Needle-flame test

Time of exposure	30 s
Result	Test passed

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	$6.12 \text{ (m/s}^2\text{)}^2\text{/Hz}$
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
	IEC 60947-7-1

Mounting

Mounting type	NS 35/7,5
	NS 35/15

Potential distributors - PTRVB 8-FI /BU




3270225

<https://www.phoenixcontact.com/us/products/3270225>

Drawings

Circuit diagram

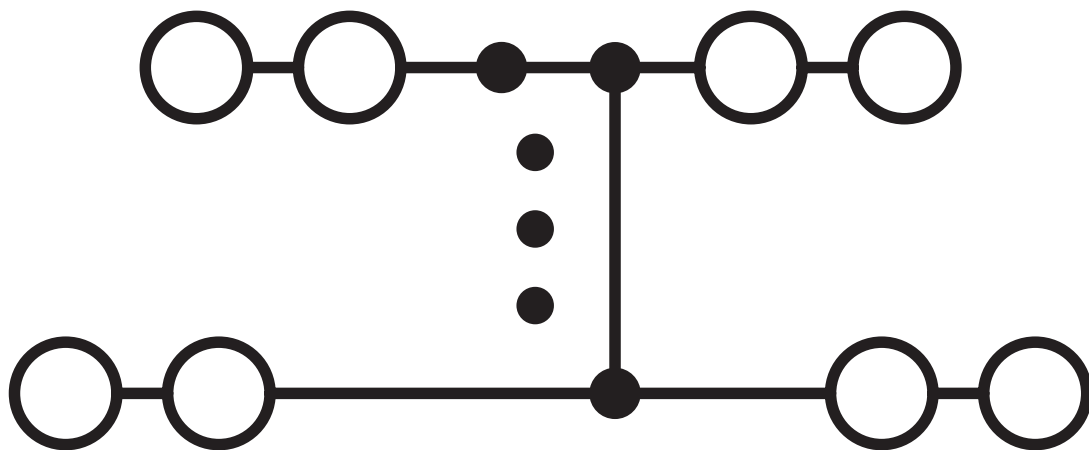

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

Approvals

DNV

Approval ID: TAE000016Y



CSA

Approval ID: 13631



IECEE CB Scheme

Approval ID: NL-58817

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	250 V	17.5 A	-	-



EAC

Approval ID: RU C-DE.AI30.B.01102



cULus Recognized

Approval ID: E60425



KEMA-KEUR

Approval ID: 71-102890

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Only flexible conductors	250 V	17.5 A	-	0.14 - 1.5
Only rigid conductors	250 V	17.5 A	-	0.14 - 2.5



EAC

Approval ID: RU C-DE.BL08.B.00682



EAC

Approval ID: B.01687

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

Classifications

ECLASS

ECLASS-9.0	27141120
ECLASS-10.0.1	27141120
ECLASS-11.0	27141120

ETIM

ETIM 8.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	
-------------	--

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

3270225

<https://www.phoenixcontact.com/us/products/3270225>

Accessories

 Note: Applying some accessories below might limit this product.

Reducing plug

Reducing plug - RPS - 0201647

<https://www.phoenixcontact.com/us/products/0201647>



Reducing plug, color: gray

Spacer plate

Spacer plate - DP-PTRV 8 - 3270166

<https://www.phoenixcontact.com/us/products/3270166>



Spacer plate, length: 100 mm, width: 8.3 mm, height: 86 mm, color: gray

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

Mounting material

Mounting material - PT-IL - 3208090

<https://www.phoenixcontact.com/us/products/3208090>

Operating decal for the push-in Technology



DIN rail perforated

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail perforated

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)


3270225

<https://www.phoenixcontact.com/us/products/3270225>

Zack marker strip

Zack marker strip - ZB 8,3:UNBEDRUCKT - 0803444

<https://www.phoenixcontact.com/us/products/0803444>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap in, for terminal block width: 8.3 mm, lettering field size: 10.5 x 8.3 mm

Zack marker strip

Zack marker strip - ZB 8,3,LGS:FORTL.ZAHLEN - 0803480

<https://www.phoenixcontact.com/us/products/0803480>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 8.3 mm, lettering field size: 10.5 x 8.3 mm

3270225

<https://www.phoenixcontact.com/us/products/3270225>

Zack marker strip

Zack marker strip - ZB 8,3,QR:FORTL.ZAHLEN - 0803479

<https://www.phoenixcontact.com/us/products/0803479>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 8.3 mm, lettering field size: 10.5 x 8.3 mm

Zack marker strip

Zack marker strip - ZB 8,3 CUS - 8191573

<https://www.phoenixcontact.com/us/products/8191573>



Zack marker strip, Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.3 mm, lettering field size: 10.5 x 8.3 mm

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

Actuation tool

Actuation tool - ST-BW 0 - 1200135

<https://www.phoenixcontact.com/us/products/1200135>

Actuation tool, for all 1.5 mm² spring cages from PT 1,5/S and FT 1,5/S



End clamp

End clamp - CLIPFIX 35 - 3022218

<https://www.phoenixcontact.com/us/products/3022218>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

End clamp

End clamp - CLIPFIX 35-5 - 3022276

<https://www.phoenixcontact.com/us/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

End clamp

End clamp - E/NS 35 N - 0800886

<https://www.phoenixcontact.com/us/products/0800886>



End clamp, width: 9.5 mm, color: gray

Potential distributors - PTRVB 8-FI /BU

3270225


<https://www.phoenixcontact.com/us/products/3270225>

End clamp

End clamp - E/UK - 1201442

<https://www.phoenixcontact.com/us/products/1201442>

End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35



End clamp

End clamp - E/UK 1 - 1201413

<https://www.phoenixcontact.com/us/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

End cover

End cover - D-PTRV 8 WH - 3270154

<https://www.phoenixcontact.com/us/products/3270154>



End cover, length: 100 mm, width: 3.8 mm, height: 80.8 mm, color: white

End cover

End cover - D-PTRV 8 WH 1-8 - 3270155

<https://www.phoenixcontact.com/us/products/3270155>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

End cover

End cover - D-PTRV 8 WH 1-8 LGS - 3270240

<https://www.phoenixcontact.com/us/products/3270240>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

End cover

End cover - D-PTRV 8 WH 8-1 - 3270242

<https://www.phoenixcontact.com/us/products/3270242>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

End cover

End cover - D-PTRV 8 WH 8-1 LGS - 3270244

<https://www.phoenixcontact.com/us/products/3270244>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

End cover

End cover - D-PTRV 8 WH 1-16 - 3270228

<https://www.phoenixcontact.com/us/products/3270228>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

End cover

End cover - D-PTRV 8 WH 1-16 LGS - 3270229

<https://www.phoenixcontact.com/us/products/3270229>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

End cover

End cover - D-PTRV 8 WH 9-16 - 3270211

<https://www.phoenixcontact.com/us/products/3270211>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

End cover

End cover - D-PTRV 8 WH 9-16 LGS - 3270212

<https://www.phoenixcontact.com/us/products/3270212>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

End cover

End cover - D-PTRV 8 WH 17-24 - 3270213

<https://www.phoenixcontact.com/us/products/3270213>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

End cover

End cover - D-PTRV 8 WH 17-24 LGS - 3270214

<https://www.phoenixcontact.com/us/products/3270214>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

End cover

End cover - D-PTRV 8 WH 25-32 - 3270215

<https://www.phoenixcontact.com/us/products/3270215>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

End cover

End cover - D-PTRV 8 WH 25-32 LGS - 3270216

<https://www.phoenixcontact.com/us/products/3270216>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

End cover

End cover - D-PTRV 8 WH A-H - 3270156

<https://www.phoenixcontact.com/us/products/3270156>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

End cover

End cover - D-PTRV 8 WH A-H LGS - 3270241

<https://www.phoenixcontact.com/us/products/3270241>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

End cover

End cover - D-PTRV 8 WH H-A - 3270243

<https://www.phoenixcontact.com/us/products/3270243>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

End cover

End cover - D-PTRV 8 WH H-A LGS - 3270245

<https://www.phoenixcontact.com/us/products/3270245>



End cover, length: 100 mm, width: 2.2 mm, height: 80.8 mm, color: white

Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663

<https://www.phoenixcontact.com/us/products/0201663>



Insulating sleeve, color: white

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

Insulating sleeve

Insulating sleeve - MPS-IH RD - 0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red




Insulating sleeve

Insulating sleeve - MPS-IH BU - 0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

Insulating sleeve

Insulating sleeve - MPS-IH YE - 0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow



Insulating sleeve

Insulating sleeve - MPS-IH GN - 0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

Insulating sleeve

Insulating sleeve - MPS-IH GY - 0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray



Insulating sleeve

Insulating sleeve - MPS-IH BK - 0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

End cap

End cap - NS 35/ 7,5 CAP - 1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - 1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - 0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>


Continuous plug-in bridge

Continuous plug-in bridge - FBST 500-PLC RD - 2966786

<https://www.phoenixcontact.com/us/products/2966786>



Continuous plug-in bridge, color: red

 Max. current carrying capacity: 32 A


Continuous plug-in bridge

Continuous plug-in bridge - FBST 500-PLC GY - 2966838

<https://www.phoenixcontact.com/us/products/2966838>



Continuous plug-in bridge, color: gray

 Max. current carrying capacity: 32 A

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>


Continuous plug-in bridge

Continuous plug-in bridge - FBST 500-PLC BN - 2967976

<https://www.phoenixcontact.com/us/products/2967976>




Continuous plug-in bridge, color: brown

 Max. current carrying capacity: 32 A


Continuous plug-in bridge

Continuous plug-in bridge - FBST 500-PLC BU - 2966692

<https://www.phoenixcontact.com/us/products/2966692>



Continuous plug-in bridge, color: blue

 Max. current carrying capacity: 32 A

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

Plug-in bridge

Plug-in bridge - FBST 50-PLC RD - 1081050

<https://www.phoenixcontact.com/us/products/1081050>



Plug-in bridge, color: red

Plug-in bridge

Plug-in bridge - FBST 50-PLC BU - 1081051

<https://www.phoenixcontact.com/us/products/1081051>



Plug-in bridge, color: blue

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

Plug-in bridge

Plug-in bridge - FBST 50-PLC GY - 1081053

<https://www.phoenixcontact.com/us/products/1081053>



Plug-in bridge, color: gray

Test plugs

Test plugs - MPS-MT - 0201744

<https://www.phoenixcontact.com/us/products/0201744>



Test plugs, with solder connection up to 1 mm² conductor cross section, color: gray

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

Marker for terminal blocks

Marker for terminal blocks - TM-PTRV 8,QR:1-8 - 0803468

<https://www.phoenixcontact.com/us/products/0803468>



Marker for terminal blocks, white, labeled, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 2.4 x 9.2 mm, Number of individual labels: 2

Marker for terminal blocks

Marker for terminal blocks - TM-PTRV 8,QR:8-1 - 0803470

<https://www.phoenixcontact.com/us/products/0803470>



Marker for terminal blocks, white, labeled, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 2.4 x 9.2 mm

Potential distributors - PTRVB 8-FI /BU

3270225

<https://www.phoenixcontact.com/us/products/3270225>

Marker for terminal blocks

Marker for terminal blocks - TM-PTRV 8,QR:A-H - 0803471

<https://www.phoenixcontact.com/us/products/0803471>



Marker for terminal blocks, white, labeled, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 2.4 x 9.2 mm

Marker for terminal blocks

Marker for terminal blocks - TM-PTRV 8,QR:H-A - 0803473

<https://www.phoenixcontact.com/us/products/0803473>



Marker for terminal blocks, white, labeled, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 2.4 x 9.2 mm, Number of individual labels: 8

Potential distributors - PTRVB 8-FI /BU



3270225

<https://www.phoenixcontact.com/us/products/3270225>

Retaining bracket

Retaining bracket - CDC-PTRV - 3270167

<https://www.phoenixcontact.com/us/products/3270167>



Retaining bracket, via four PTRV single modules, pitch: 8.3 mm, width: 35.6 mm, height: 71.5 mm, color: gray

Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com