

# PPC

## PPC-7525/7527

### Low Power Consumption 15"/ 17" Panel PC

#### Features and Benefits:

- Supports Intel® Pentium® M / Celeron® M CPU up to 1.8 GHz
- Intel® 910GMLE Chipset
- Low power consumption and economical solution
- Compact size with high performance
- High speed Gigabit LAN
- On-board IDE interface, Type II compact Flash slot
- Optional slim CD-ROM drive
- High precision touchscreen
- Optional PCI Expansion slot (1 or 3 slots)



No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan  
Tel: +886-2-8751-1111  
Fax: +886-2-8751-1199  
Email: sales@protech.com.tw  
<http://www.protech.com.tw>




ISO CERTIFIED  
9001 14001


# PPC-7525/7527

Ruggedized and Low Power  
15"/17" Panel PC


Front View

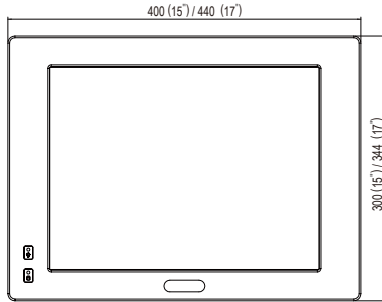

Rear View

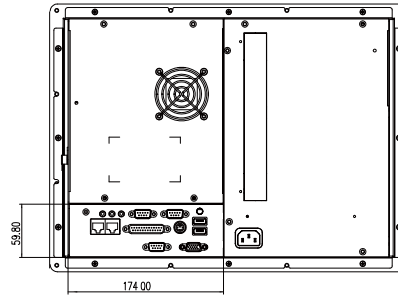

Side View



Unit: mm

## Specification

### Systems

<b>CPU Support</b>	Intel® Pentium® M / Celeron® M up to 1.8 GHz CPU
<b>Chipset</b>	Intel® 910GML E + ICH6M
<b>Memory Support</b>	1 x 200-pin DDR2 SO-DIMM, 512MB DDR2 SO-DIMM (up to 2GB)
<b>Front Bezel</b>	Aluminum
<b>Power Supply</b>	AC 110W power supply
<b>Drive Bay</b>	1 x 2.5" SATA HDD, 1 x IDE CF slot on board, 1 x slim CD-ROM
<b>O.S. Support</b>	Windows XP/XPE/CE.net, Linux Redhat 8.0/9.0
<b>Dimension (WxHxD)</b>	PPC-7525: 400 x 300 x 109.9mm (15.75" x 11.81" x 4.33") PPC-7527: 440 x 344 x 117.3mm (17.32" x 13.54" x 4.60")
<b>System Weight</b>	PPC-7525: 9Kg PPC-7527: 10.5Kg
<b>VESA Mounting Support</b>	75mm /100mm VESA bracket (optional)
<b>Certificate</b>	CE / FCC

### I/O Ports

<b>USB</b>	2 x USB2.0
<b>KB / Mouse</b>	1 x PS/2 port ( KB/MS for Y-cable)
<b>Audio</b>	1 x Line-in, 1 x Line-out, 1 x Mic-in
<b>Serial Port</b>	3 x COM port (COM 1 & COM 3 for RS-232, COM 2 for RS232/RS422/RS485 selectable, All COM port support +5V/+12V selectable)
<b>Parallel Port</b>	1 x parallel port (SPP/EPP/ECP, share with Digital I/O )

<b>Digital I/O</b>	4 in / 4 out (share with parallel port)
<b>LAN</b>	2 x LAN (1 x 10/100, 1 x 10/100/1000)
<b>VGA</b>	1 x DB-15 VGA Interface
<b>Brightness Control</b>	VR on rear panel
<b>Expansion Slots</b>	1 x PCI or 3 x PCI slot (optionl)

### Display

<b>LCD</b>	15" / 17" TFT LCD
<b>Max. Resolution</b>	1024 x 768 (15") / 1280 x 1024 (17")
<b>Brightness</b>	350 cd/m <sup>2</sup> (15") / 300 cd/m <sup>2</sup> (17")
<b>Touch Screen</b>	7W Analog resistive (USB interface)

### Environment

<b>Operating Temp.</b>	0° ~ 40°C
<b>Storage Temp.</b>	-20° ~ 60°C
<b>Humidity</b>	20% ~ 90%

### Ordering Information

<b>PPC-7525</b>	Panel PC with 15" LCD, S478 Pentium® M CPU board, resistive touchscreen, 110W AC power supply
<b>PPC-7527</b>	Panel PC with 17" LCD, S478 Pentium® M CPU board, resistive touchscreen, 110W AC power supply
<b>PPC-7500-1P</b>	1 x PCI riser card for PPC7525 / 7527
<b>PPC-7500-3P</b>	3 x PCI riser card for PPC7525 / 7527
<b>PPC-VESAKIT</b>	VESA bracket

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in May 2009.