| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 11/16/10 | |

APPROVED: _____

DATE: _____ TITLE: _____

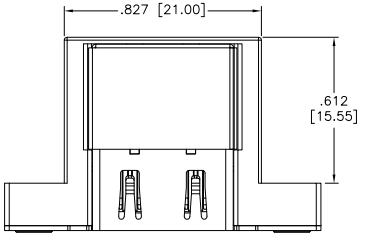


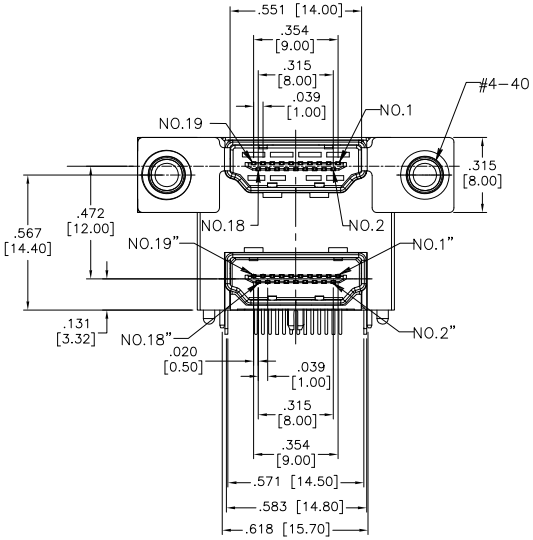








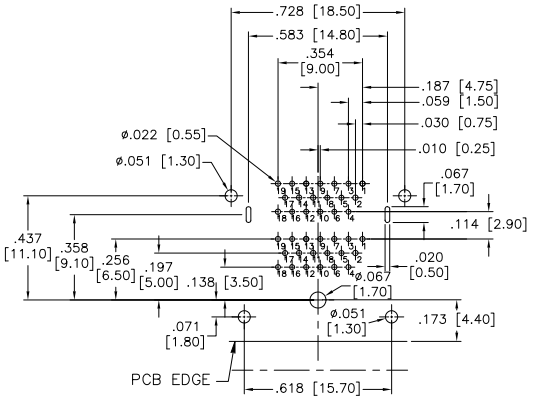


RECOMMENDED PCB LAYOUT

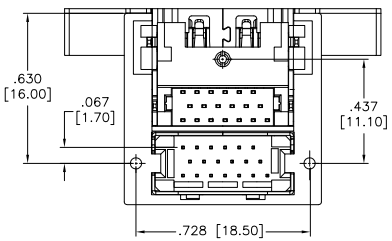


SPECIFICATIONS:
Material:
Housing: Hi-temp thermoplastic, UL 94V-0
Housing color: Black
Contact: Copper Alloy
Shield: Copper Alloy, Tin plated over Nickel
Plating:
Gold Flash over Nickel underplate on contact area,
Tin over Copper underplate on tails.
Electrical:
Current rating: 0.5A
Dielectric strength: 500VAC for 1 minute min.
Insulation resistance: 100 Megohm min @ 500V DC
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS Compliant
Recommended soldering temp: 260°C for 5 seconds.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | DY | 11/16/10 |
| CHECKED | | |
| APPROVED | | |


**ADAM TECH**
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710


TITLE: DUAL HDMI STACKED CONNECTOR THROUGH HOLE TYPE

| SIZE | PART NO. | REV. |
|---|---|---|
| X | HDMI-D-RA-1-MF | - |

| REF: | SCALE: | SHEET |
|---|---|---|
| S000176T | NTS | 1 OF 1 |