

DESCRIPTION


MBB51XA-EJ series are high brightness InGaN/GaN blue LED lamps with 5mm diameter epoxy package .

MBB51CA-EJ is blue chip with blue transparent lens.

MBB51DA-EJ is blue chip with blue diffused

MBB51TA-EJ is blue chip with clear transparent lens.

MBB51WA-EJ is blue chip with white diffused lens.

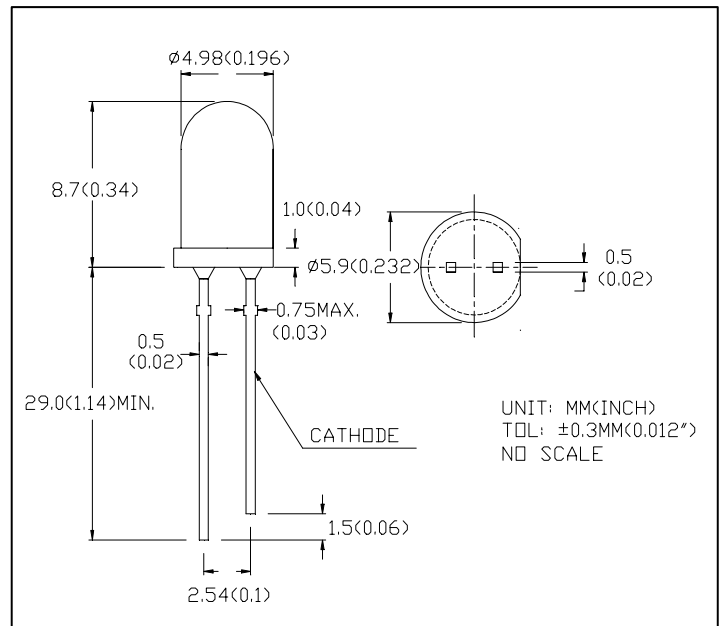

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @ Ta=25°C	125mW
Forward Current, DC (IF)	30mA
Reverse Voltage	5V
Operating Temperature Range	-20 to +80°C
Storage Temperature Range	-30 to +100°C
Lead Soldering Temperature (1/16" from body)	260°C for 5 sec.

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	VF		3.5	4.5	V	IF=20mA
Reverse Breakdown Voltage	BVR	5			V	IR=100μA
Dominant Wavelength	λ_d	465	468	470	nm	IF=20mA
Spectral Line Half Width	$\Delta\lambda$		30		nm	IF=20mA
Luminous Intensity	IV	100	180		mcd	IF=20mA
	IV	2500	3500		mcd	IF=20mA
Viewing Angle	2θ	1/2	40		degree	IF=20mA
	2θ	1/2	20		degree	IF=20mA

CAUTION

Static electricity and surge damages the LED ,It is recommended to use a wrist band or anti-eletrostatic glove when handling the LED . All devices,equipment and machinery must be properly grounded.

REV : A

12/12/02



MICRO ELECTRONICS LTD.

G/F, 38 Hung To Road, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. BOX 69477, Hong Kong. TEL: (852) 23430181 FAX: (852) 23410321

HOME PAGE: <http://www.microelectr.com.hk> E-MAIL ADDRESS: common@microelectr.com.hk

MBB51DA-EJ
MBB51WA-EJ

