



Rating: 0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

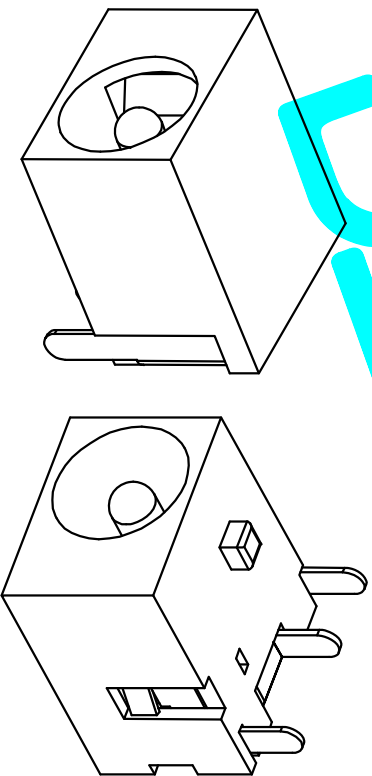

PIN	Ø165	Ø200	Ø250
APPD.			



SCHEMATIC

ITEM	PART NAME	QTY.	MATERIAL	FINISHING
①	HOUSING	1	PBT	
②	SPRING PIECE	1	SUS301	Ag-Plating
③	CURVER PIECE	1	BRASS	Ag-Plating
④	CONTACT FOOT	1	H59 BRASS	Ni-Plating

APPROVALS		DATE
DRAWN	G.M.Chen	2018/3/15
CHECKED		
APPROVALS		

TITLE: DC JACK
 PART NO. DC-DD044-XXXX
 SCALE: 1:1
 SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	30°±0.1°	±0.30	±0.20	±0.15	ANGLE	±2°	DRAWING NO.	PROJ.
	A		NEW				10~30	5~10	±0.10						