


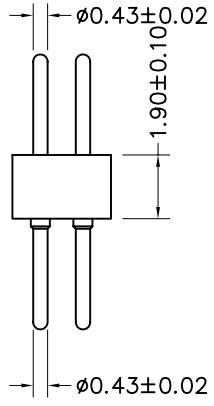


环保物料

TEL:0769-82001899



P. C. B LAYOUT

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2µm/80µ"NI, 5µm/200µ"Sn

Gold Plated:2µm"/80µ"Ni, 0.8µ" gold

Insuiator:PPS UL94V-0

Mating pinØ:0.43mm

Electrical:

Current rating:1Amps/contact max.

Contact resistance:≤4mΩ/contact

Insuiation resistance:≥1000MΩ at V=100V

Operaing voltage:60VAC/DC

Mechanical:

Mechanical lige:min 500 cycle

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN 兴飞连接器有限公司 XFCN CONNECTORS CO.,LTD.	SHEET	1/1	
				X.	±0.30	X°	±5°		CHKD	DATE	2020.04.12
				.X	±0.20	.X°	±2°		APPD	UNITS	mm
				.XX	±0.08	.XX°	±1°		VIEW	SCALE	1:1
				.XXX	±0.03	.XXX°	±0.5°		PRODUCT NAME	1.27mm Machined Pin Header	
AO	MODIFICATION	DRAW	DATE			PART. NO.	MH127V-12-04-0820		DWG. NO.	009	