

WFD79C0925FG


For Short-range Wireless

■ Features

- SAW filter for Smart Meter.
- Ultra compact and light. (1.4×1.1mm)

Pb
Free


RoHS Compliant
Directive 2011/65/EU

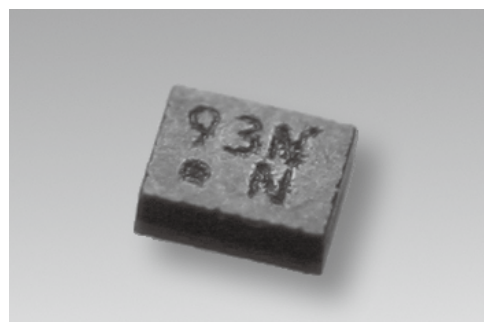

■ Specifications

Model		WFD79C0925FG		
Item		min.	typ.	max.
Nominal frequency (MHz)		–	925.8	–
Maximum insertion loss (dB) (923.5 to 928.1MHz)		–	2.1	3.0
Ripple (923.5 to 928.1MHz)		–	0.4	1.8
Guaranteed attenuation (dB)	815MHz to 845MHz	40	55	–
	860MHz to 890MHz	40	50	–
	900MHz to 915MHz	15	25	–
	945MHz to 960MHz	15	30	–
Operating temperature range (°C)		-25 to +75		
Impedance (Ω)		50		

■ Dimensions

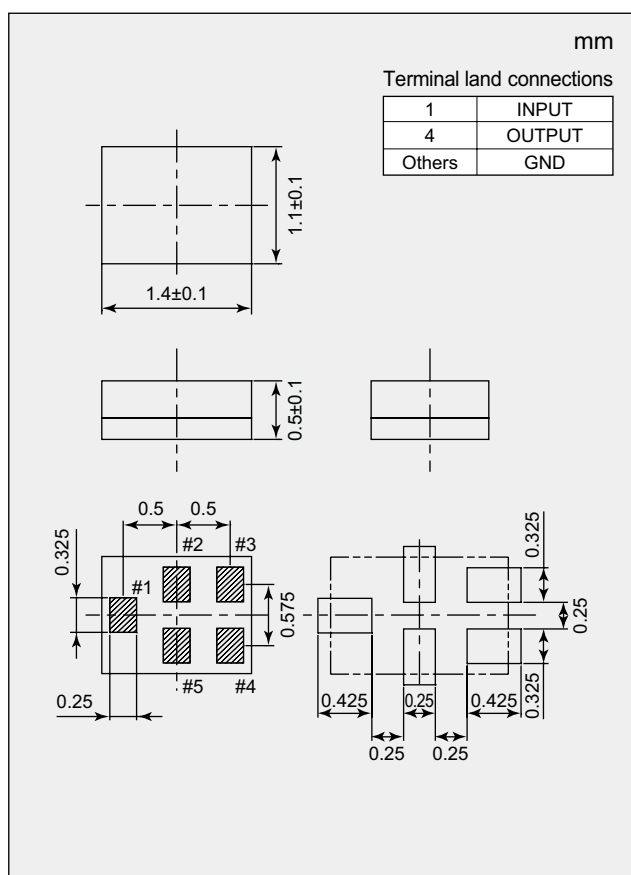

■ Characteristics

