


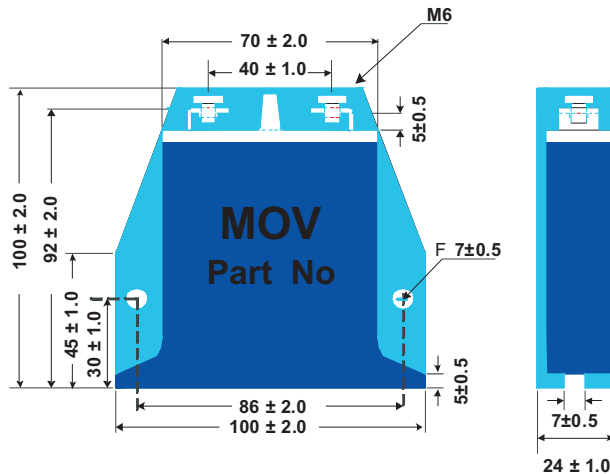
METAL OXIDE VARISTOR

Housing Type 70KA


Part Number	Maximum Allowable Voltage		Varistor Voltage		Maximum Clamping Voltage At 150A (V)	Withstanding Surge Current 8/20 S (A)	Rated Wattage (W)	Energy 10/1000 s (J)	UL 
	ACrms (V)	DC (V)	DC (V)	Tolerance Range					
MOV-201KD53H	130	170	200	185-225	330	70,000	1.6	490	✓
MOV-221KD53H	140	180	220	198-242	360	70,000	1.6	530	✓
MOV-241KD53H	150	200	240	216-264	395	70,000	1.6	570	✓
MOV-271KD53H	175	225	270	243-297	455	70,000	1.6	630	✓
MOV-301KD53H	190	250	300	270-330	505	70,000	1.6	660	✓
MOV-331KD53H	210	275	330	297-363	550	70,000	1.6	695	✓
MOV-361KD53H	230	300	360	324-396	595	70,000	1.6	730	✓
MOV-391KD53H	250	320	390	351-429	650	70,000	1.6	880	✓
MOV-431KD53H	275	350	430	387-473	710	70,000	1.6	950	✓
MOV-471KD53H	300	386	470	423-517	775	70,000	1.6	1000	✓
MOV-511KD53H	320	415	510	459-561	845	70,000	1.6	1100	✓
MOV-561KD53H	350	460	560	504-616	920	70,000	1.6	1100	✓
MOV-621KD53H	385	505	620	558-682	1025	70,000	1.6	1225	✓
MOV-681KD53H	420	560	680	612-748	1120	70,000	1.6	1530	✓
MOV-751KD53H	480	640	750	675-825	1240	70,000	1.6	1630	✓
MOV-821KD53H	510	675	820	738-902	1355	70,000	1.6	1835	✓
MOV-911KD53H	575	745	910	819-1001	1500	70,000	1.6	2040	✓
MOV-102KD53H	660	850	1000	945-1155	1650	70,000	1.6	2245	✓
MOV-112KD53H	680	895	1100	990-1210	1815	70,000	1.6	2550	✓
MOV-122KD53H	750	970	1200	1080-1320	1925	70,000	1.6	2650	✓

* Add suffix - L for RoHS Compliant

■ Dimensions



■ PULSE RATING CURVES

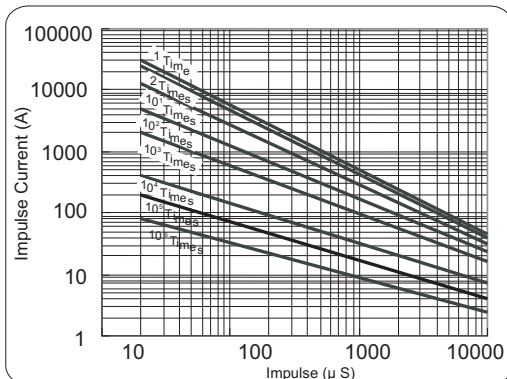

■ V-I CHARACTERISTIC CURVES

