
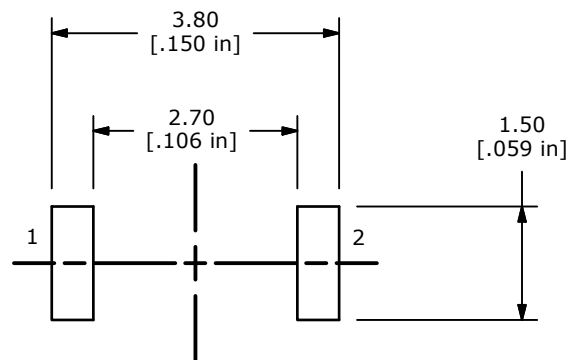








PCB LAYOUT

▲ CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
 $x.x = +/-0.4$
 $x.xx = +/-0.25$
2. TERMINAL NUMBERS FOR REF. ONLY
3. CONTACT MATERIAL: SILVER
4. CONTACT RATING: 20 mA; 15 VDC
5. TRAVEL: $0.13 \pm 0.05\text{mm}$
- ▲ 6. OPERATING FORCE: 330 ± 70 GRAMS
7. ELECTRICAL LIFE: 300,000 CYCLES
8. CONTACT RESISTANCE: 500m Ω MAX.
9. DENOTES CRITICAL PARAMETER
10. BOUNCE: 10m SECONDS MAX
11. INSULATION RESISTANCE: 50M Ω MIN @ 100VDC.
12. DIELECTRIC STRENGTH: 250VAC FOR 1 MINUTE WITH NO BREAK DOWN
13. OPERATING TEMPERATURE: -40C to +85C
14. 2002/95/EC (ROHS) COMPLIANT; HALOGEN FREE

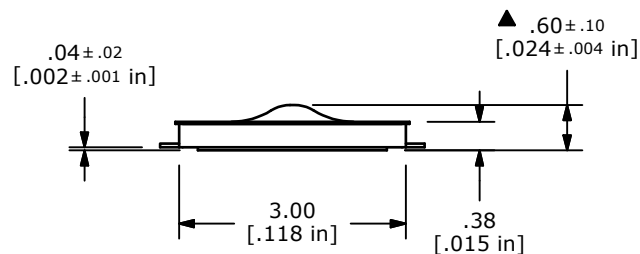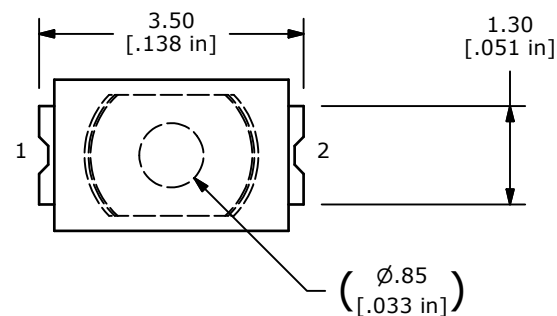

TITLE TL3380AF330QG

A	22197	New Release	3/14/16	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE
10:1DATE
3/14/2016DR
rcDWG
P003021REV
A