

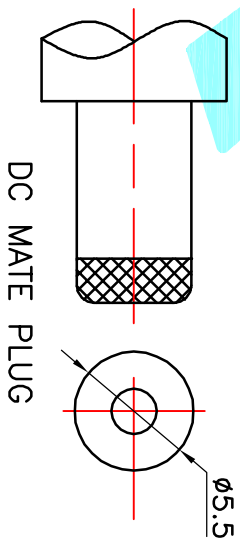


P.C.B LAYOUT(Copper-side view)

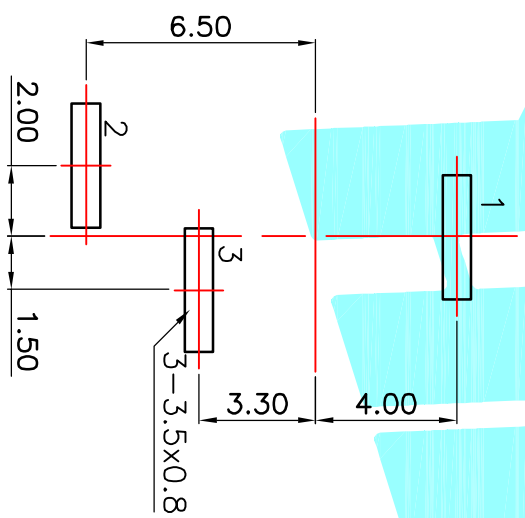

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3~20N  
 Operating Life:5,000cycles

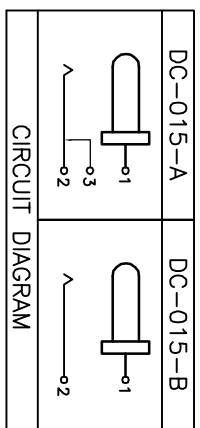

Model No.	1	2
PIN	$\phi 2.0$	$\phi 2.5$

② Terminal	3	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM PART NAME	TERN.O.	QTY.	MATERIAL FINISHING
APPROVALS		DATE	REMARK
DRAWN	J.X.Zhang	2013/11/11	
ELECTRONICS CO.,LTD			
PHONE JACKES			
DC-015			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE						
	30 <sup>±0.15</sup>	±0.30	ANGLE			
	10 <sup>±0.30</sup>	±0.20	UNIT: mm			
	5 <sup>±0.10</sup>	±0.15	SCALE: 1:1			
	~ 5	±0.10	DRAWING NO.			
			PROJ.			
			SHEET 1 OF 1			