
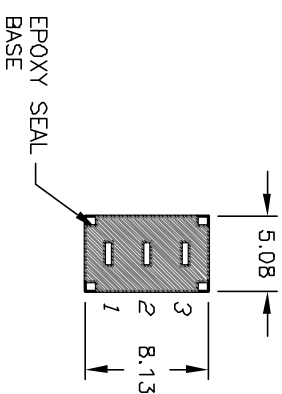


CIRCUIT: SPDT
CONTACT CONFIGURATION


SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	OFF	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NDS. FOR REF. ONLY
4. RATING: 3A @120VAC or 28VDC.
1A @250VAC.
5. FIXED TERM/MOVING CONTACT
COPPER ALLOY W/SILVER PLATING
6. ELECTRICAL LIFE: 30,000 MAKE-AND-BREAK
CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1000M OHM TYPICAL
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
9. OPERATING TEMP.: -30°C to $+85^{\circ}\text{C}$
10. ACTUATOR: NYLON BLACK (UL94-HB)

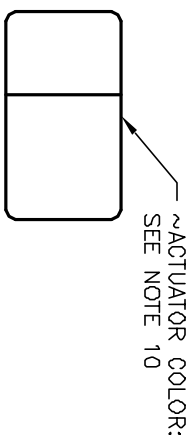

BOTTOM VIEW

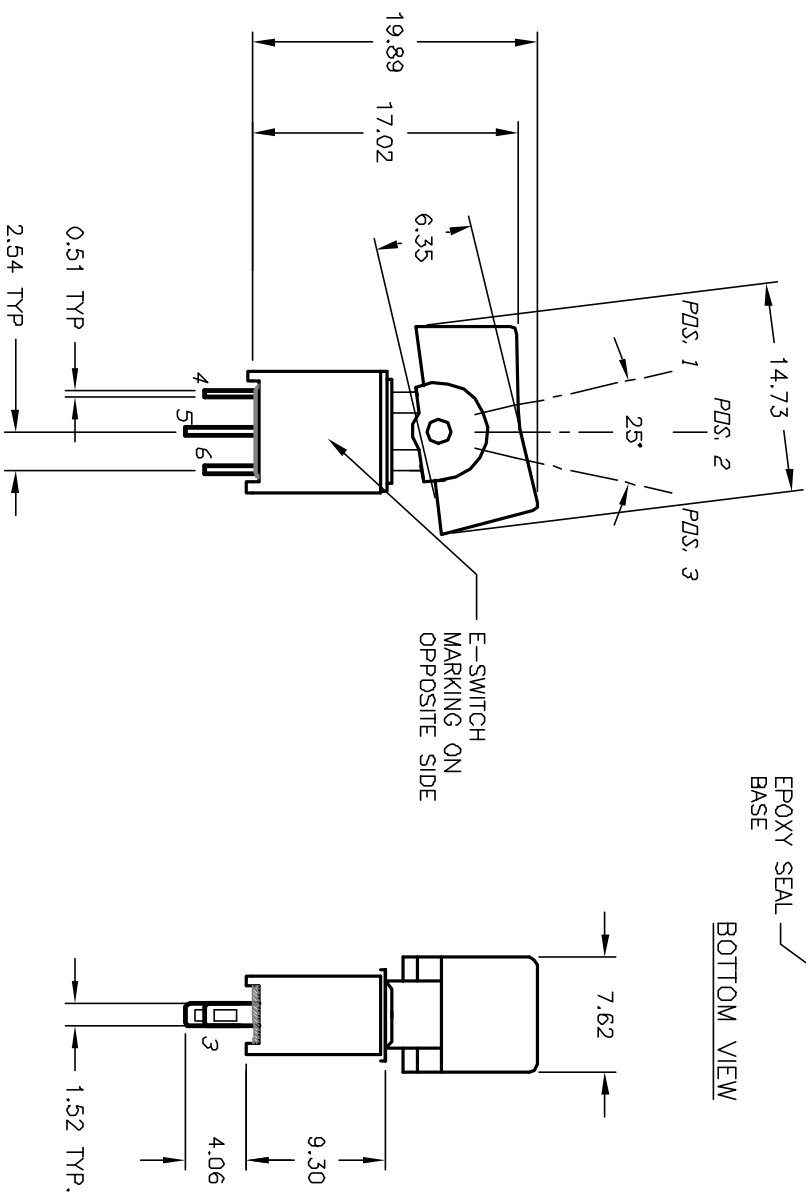

C		12664	REVISED NOTE 4	12/26/02	CB	E-SWITCH®		
B		12207	REMOVED P.C.B. LAYOUT	6/5/02	CB			
A		12082	RELEASED FOR PRODUCTION	4/22/02	CB			
REV.		ECN NO.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						SCALE	DATE	DR
						2:1	4/22/02	CB
						400A WMSP-3 R1 M1 QE		
						DWG	T413002	REV
						C		