




Circuit Diagram



PCB Layout(Pattern Side)



NOTE:
 1. Operating Force: $240gf \pm 80gf$
 2. Total Travel : $2.4 \pm 0.3mm$
 3. Pre Travel: $1.5 \pm 0.3mm$

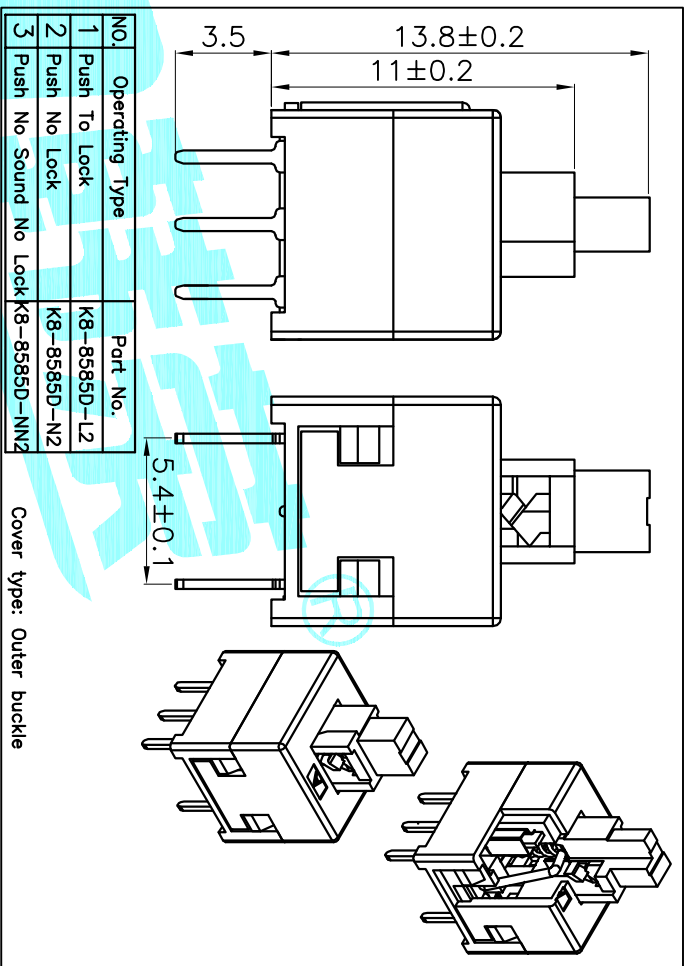

NO.	Operating Type	Part No.
1	Push To Lock	K8-8585D-L2
2	Push No Lock	K8-8585D-N2
3	Push No Sound No Lock	K8-8585D-NN2

Cover type: Outer buckle

NO.	Operating Type	Part No.
1	Push To Lock	K8-8585D-L1
2	Push No Lock	K8-8585D-N1
3	Push No Sound No Lock	K8-8585D-NN

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑧	Terminal	—	6	Brass strip	Plating silver	—
⑦	Contact	—	2	Phosphor bronze	Plating silver	—
⑥	Securing glue	—	2	PA66	Black	—
⑤	Spring	—	1	SUS	Natural	—
④	Base	—	1	PBT	Black	—
③	Crochet Needle	—	1	SUS	Natural	—
②	Cover	—	1	POM	Gray	—
①	KNOB	—	1	POM	White/Black	—

APPROVALS

DRAWN xu qi feng 2014.12.05

CHECKED

TITLE: PUSHBUTTON SWITCHS

ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS	DATE	PART NO.	SCALE: 1:1	PROJ.
TOLERANCES ARE				
$30^{+0.1}$	± 0.30	ANGLE		
$10^{+0.20}$	± 0.20	UNIT: mm		
$5^{+0.10}$	± 0.15	DRAWING NO.		
~ 5	± 0.10			