

C&K D Series

Typical Applications

- 



Materials

OPERATING TEMPERATURE: -30°C to +65°C

NOTE: Specifications and materials listed above are for standard switches.

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages H-62 through H-66. For additional options not shown in catalog, consult Customer Service Center.

Rocker





www.ittcannon.com

C&K D Series


Miniature Snap-in Power Rocker Switches

SWITCH FUNCTION

NO. POLES	MODEL NO.	AMP RATING*	SWITCH FUNCTION			CONNECTED TERMINALS			SCHEMATIC
			POS. 1	POS. 2	POS. 3	POS. 1	POS. 2	POS. 3	
SP	D102 D502	4 10	ON	NONE	OFF	1-1A	N/A	OPEN	SPST 
	D101 D501	4 10	ON	NONE	ON			1-1B	
	D103 D503	4 10		OFF					
	D105	4	MOM.	OFF	MOM.		N/A		
	D108 D508	4 10	MOM.	NONE	ON				


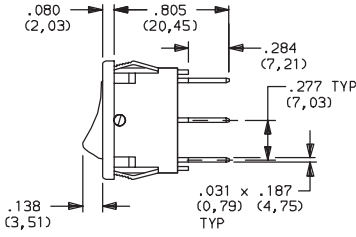



ACTUATOR SHOWN IN POSITION 1




TERMINAL NOS.
FOR REF. ONLY

Part number shown: D101J12S215QA

DP	D202 D602	4 10	ON	NONE	OFF	1-1A, 2-2A	N/A	OPEN	DPST 
	D201 D601	4 10	ON	NONE	ON			1-1B, 2-2B	
	D203	4		OFF					
	D608	10	MOM.	NONE			N/A		



ACTUATOR SHOWN IN POSITION 1



TERMINAL NOS.
FOR REF. ONLY

Part number shown: D201J12S215QA

MOM. = Momentary

*AMP RATING: D10X and D20X models: 4 AMPS @ 125 V AC; 2 AMPS @ 250 V AC. D50X and D60X models: 10 AMPS @ 125 V AC; 5 AMPS @ 250 V AC.

All models . DX01, DX02 models also available with . See CONTACT MATERIALS, page H-68.

Rocker



Third Angle Projection


Dimensions are shown: Inch (mm)

Specifications and dimensions subject to change


C&K D Series Miniature Snap-in Power Rocker Switches



J1 ROCKER

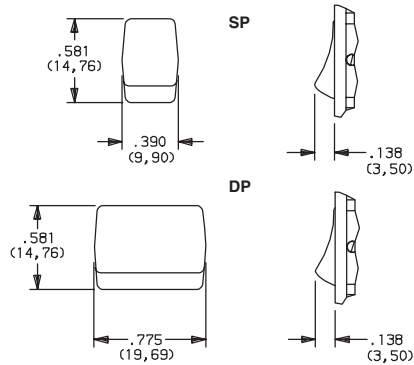

J5 LEVER

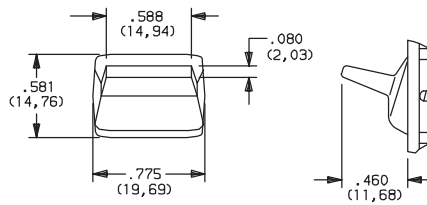


OPTION CODE	ACTUATOR COLOR
2	BLACK
1	WHITE
3	RED

NOTE: Actuator finish: matte. Other colors available, consult Customer Service Center.

J5 actuator available only with DP models D201, D202, D601 and D602.

MOUNTING STYLE/COLOR


S SNAP-IN



OPTION CODE	HOUSING COLOR
2	(STD.) BLACK
1	WHITE

NOTE: Frame finish on housing: matte. Other colors available, consult Customer Service Center.


B2 RECESSED SNAP-IN ACTUATOR GUARD, BLACK

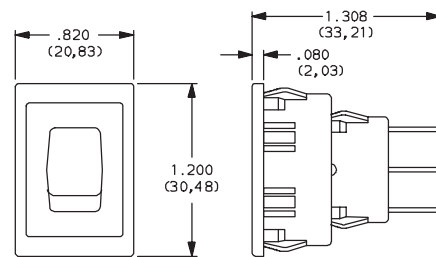

NOTE: Vertical mount, SP models only.


G2 ACTUATOR GUARD, BLACK

NEW!

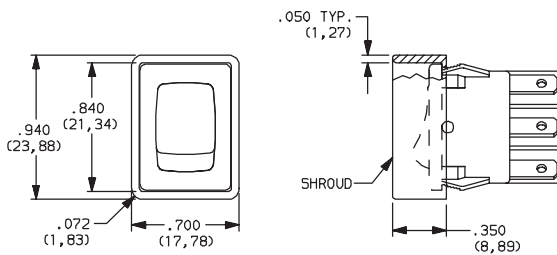


NOTE: Vertical mount, SP models only.

PANEL MOUNTING

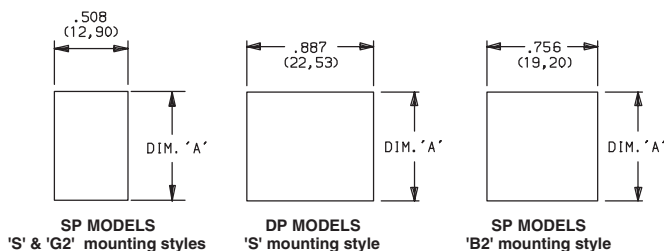

PANEL THICKNESS	DIM 'A' SP & DP MODELS 'S' MOUNTING STYLE	DIM 'A' WITH 'G2' OPTION SP MODELS ONLY	DIM 'A' SP MODELS 'B' MOUNTING STYLE
.030-.049 (0, 76) (1, 24)	.756 (19, 20)	.764 (19, 41)	1.068 (27, 13)
.049-.079 (1, 24) (2, 01)	.764 (19, 41)	.780 (19, 81)	1.076 (27, 33)
.079-.118 (2, 01) (3, 00)	.780 (19, 81)	n/a	1.092 (27, 74)

NOTE: Blank insert available for SP models only, see page H-68.



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

Rocker




H

C&K D Series Miniature Snap-in Power Rocker Switches

TERMINATIONS


A RIGHT ANGLE, PC THRU-HOLE

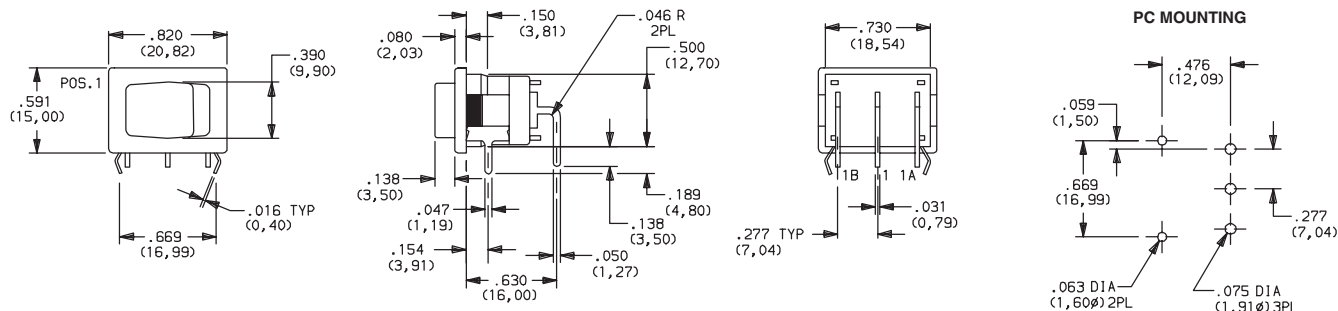


Available with D101, D102, D501, D502 SP models only.

TERMINATIONS


02 PC THRU-HOLE

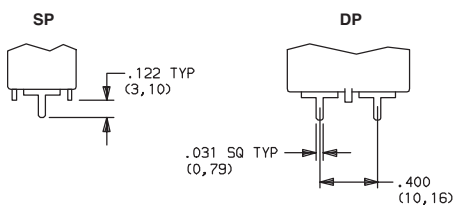

06 EXTENDED PC THRU-HOLE

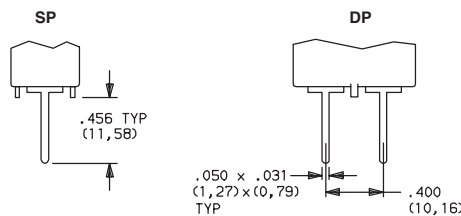


PC MOUNTING (02 and 06)




Available with DX01 and DX02 models only.

Available with DX01 and DX02 models only.

15 QUICK CONNECT

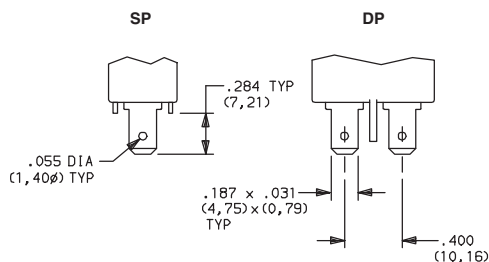


05 TWISTED QUICK CONNECT



NOTE: Terminals are twisted.

17 WIRABLE QUICK CONNECT

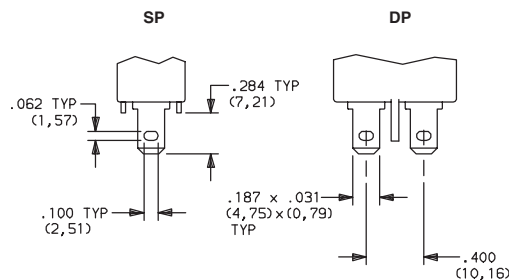

Available with DX01 and DX02 models only.

ACTUATORS

NONE NO MARKING


D ON-OFF

H O |

N LARGE DOT

P O -

R RED RECTANGLE U LARGE DOT ON END ON END



NOTE: Orientation of actuator markings and terminals.

'D, H, P & U' marking options: marking color white, standard for all actuator colors except white. Black marking color, standard for white actuators. 'R & N' marking option: red marking color, standard. Consult Customer Service Center for other available marking colors.



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

www.ittcannon.com



C&K D Series Miniature Snap-in Power Rocker Switches

CONTACT MATERIAL

OPTION CODE	RoHS COMPLIANT *	RoHS COMPATIBLE *	CONTACT AND TERMINAL MATERIAL	RATINGS	
QA	YES	YES	SILVER ¹	POWER	D10X and D20X MODELS: 4 AMPS @ 125 V AC; 2 AMPS @ 250 V AC (UL/CSA). D50X and D60X MODELS: 10 AMPS @ 125 V AC; 5 AMPS @ 250 V AC (UL/CSA).
QF	YES	YES			D10X and D20X MODELS: 4 AMPS @ 125 V AC; 2 AMPS @ 250 V AC (UL/CSA). 4(2) AMPS @ 125 V AC; 2(1) AMPS @ 250 V AC, T85 (VDE). D50X and D60X MODELS: 10 AMPS @ 125 V AC; 5 AMPS @ 250 V AC (UL/CSA). 10(6) AMPS @ 125 V AC; 5(3) AMPS @ 250 V AC, T85 (VDE).

¹MOVABLE CONTACT: D10X and D20X MODELS: Copper, silver plated.
D50X and D60X MODELS: Coin silver, silver plated.


STATIONARY CONTACTS & TERMINALS: Copper or brass, silver plated.

NOTE: For the latest information regarding RoHS compliance, please go to: www.ittcannon.com/rohs.

All models   with all options. DX01, DX02 models    when ordered with 'QF' contact material.

AVAILABLE HARDWARE

Insert
SP Only

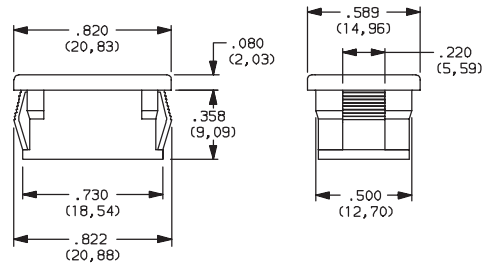

PART NO.

057190200 BLACK

Material: Nylon 6/6
Finish: Matte

Recessed Actuator Guard,
SP Only




PART NO.

057090100 BLACK

Material: 6/6 Nylon
Finish: Matte

Actuator Guard

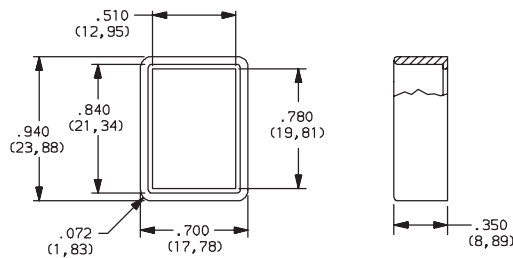

PART NO.

104C02000

Material: PBT thermoplastic
Finish: Matte



Third Angle Projection

Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

Rocker



H