

- GENERAL PURPOSE SILICON DIODES
- ALL JUNCTIONS COMPLETELY PROTECTED WITH SILICON DIOXIDE
- COMPATIBLE WITH ALL WIRE BONDING AND DIE ATTACH TECHNIQUES EXCEPT SOLDER REFLOW

CD483B
CD485B
CD486B
CD645
AND
CD5194 thru CD5196

MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C


Storage Temperature: -65°C to +175°C

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified

TYPE	V _{RM}	V _{RWM}	I _O	I _O T _A =+150°C	I _{FSM} t _p = 1/120 S T _A =25°C
	V(pk)	V(pk)	mA	mA	A
CD483B	80	70	200	50	2
CD485B	180	180	200	50	2
CD486B	250	225	200	50	2
CD645	270	225	400	150	5
CD5194	80	70	200	50	2
CD5195	180	180	200	50	2
CD5196	250	225	200	50	2

TYPE	V _F (1)	I _{R1} at V _{RWM} T _A +25°C	I _{R2} at V _{RM} T _A +25°C	I _{R3} at V _{RWM} T _A +150°C	CAP @V _R =4V
	V dc	nA dc	μA	μA dc	pF
CD483B	0.8 - 1.0	25	100	5	—
CD485B	0.8 - 1.0	25	100	5	—
CD486B	0.8 - 1.0	25	100	5	—
CD645	0.8 - 1.0	50	50	25	2.0
CD5194	0.8 - 1.0	25	100	5	—
CD5195	0.8 - 1.0	25	100	5	—
CD5196	0.8 - 1.0	25	100	5	—

NOTE 1 AT 100mA (pulsed) except for CD645
which is at 400mA (pulsed)

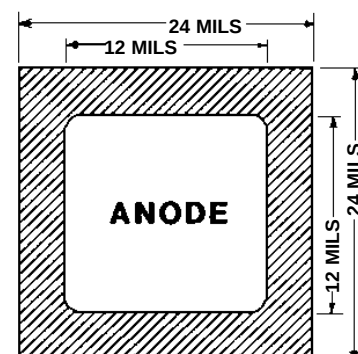

DESIGN DATA

METALLIZATION:

Top: (Anode)Al
Back: (Cathode).....Au

AL THICKNESS25,000 Å Min

GOLD THICKNESS4,000 Å Min

CHIP THICKNESS10 Mils

TOLERANCES: ALL
Dimensions ± 2 mils



COMPENSATED DEVICES INCORPORATED

22 COREY STREET, MELROSE, MASSACHUSETTS 02176
PHONE (781) 665-1071 FAX (781) 665-7379
WEBSITE: <http://www.cdi-diodes.com> E-mail: mail@cdi-diodes.com

CD483B, CD485B, CD486B, CD645, CD5194 thru CD5196


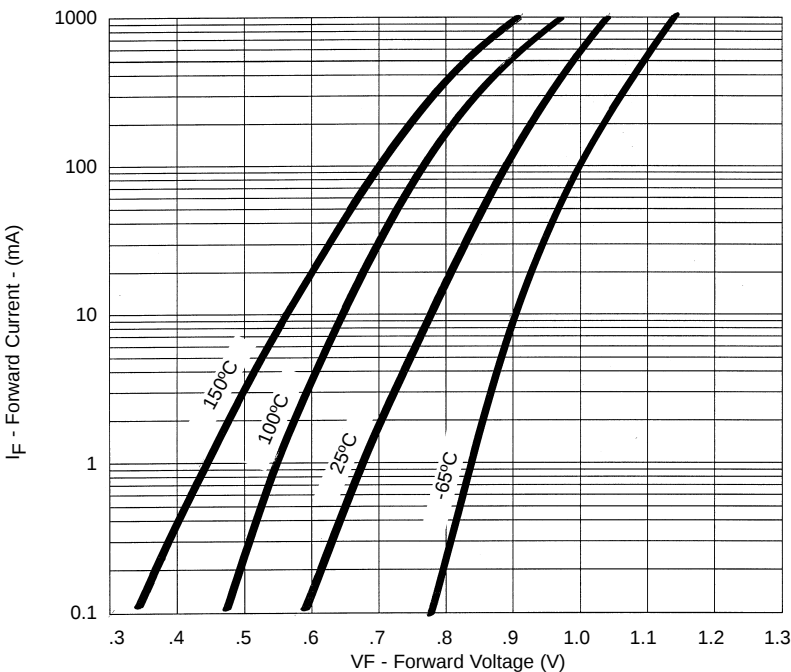


FIGURE 2
Typical Forward Current
vs Forward Voltage

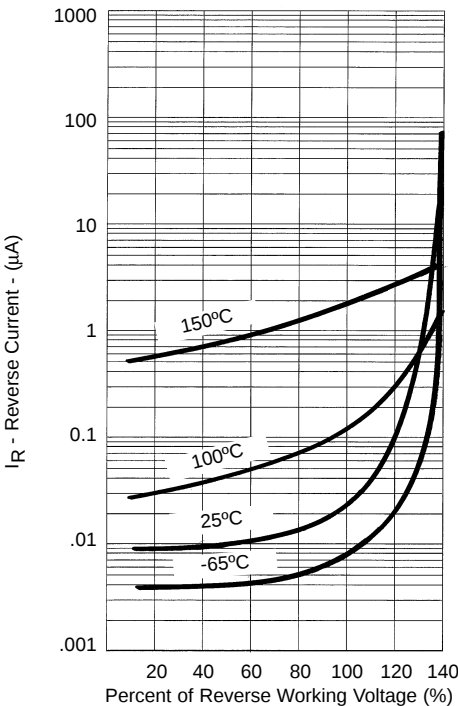

NOTE : All temperatures shown on graphs are junction temperatures

FIGURE 3
Typical Reverse Current
vs Reverse Voltage