
SSAC100GKXX


Solid State AC Switch(Anti-Parallel Thyristor-Thyristor Modules)





Type	V_{RSM} V_{DSM} V	V_{RRM} V_{DRM} V
SSAC100GK08	900	800
SSAC100GK12	1300	1200
SSAC100GK14	1500	1400
SSAC100GK16	1700	1600
SSAC100GK18	1900	1800
SSAC100GK20	2100	2000
SSAC100GK22	2300	2200

Dimensions in mm (1mm=0.0394")

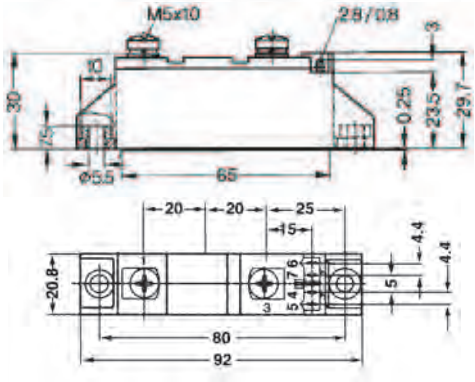

Symbol	Test Conditions		Maximum Ratings	Unit
I_{TRMS}, I_{FRMS} I_{TAVM}, I_{FAVM}	$T_{VJ}=T_{VJM}$ $T_C=85^oC$; 180° sine		180 100	A
I_{TSM}, I_{FSM}	$T_{VJ}=45^oC$ $V_R=0$	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	1700 1800	A
	$T_{VJ}=T_{VJM}$ $V_R=0$	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	1540 1640	
$\int i^2dt$	$T_{VJ}=45^oC$ $V_R=0$	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	14450 13500	A^2s
	$T_{VJ}=T_{VJM}$ $V_R=0$	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	11850 11300	
$(di/dt)_{cr}$	$T_{VJ}=T_{VJM}$ f=50Hz, t_P=200us $V_D=2/3V_{DRM}$ I_G=0.45A di_G/dt=0.45A/us	repetitive, I_T=250A non repetitive, $I_T=I_{TAVM}$	150 500	A/us
$(dv/dt)_{cr}$	$T_{VJ}=T_{VJM}$; $R_{GK}=\infty$; method 1 (linear voltage rise)	$V_{DR}=2/3V_{DRM}$	1000	V/us
P_{GM}	$T_{VJ}=T_{VJM}$ $I_T=I_{TAVM}$	t_P=30us t_P=300us	10 5	W
P_{GAV}			0.5	W
V_{RGM}			10	V
T_{VJ} T_{VJM} T_{stg}			-40...+125 125 -40...+125	°C
V_{ISOL}	50/60Hz, RMS $I_{ISOL}\leq$1mA	t=1min t=1s	3000 3600	V~
M_d	Mounting torque (M5) Terminal connection torque (M5)		2.5-4.0/22-35 2.5-4.0/22-35	Nm/lb.in.
Weight	Typical including screws		75	g

Sirectifier®

©2008SIRECTIFIER All rights reserved,
www.sirectifier.com
Tel: +86-519-86800000 Fax: +86-519-88019019 E-mail: sales@sirectifier.com

SSAC100GKXX

Solid State AC Controller(Anti-Parallel Thyristor-Thyristor Modules)

Symbol	Test Conditions	Characteristic Values	Unit
I_{RRM}, I_{DRM}	$T_{VJ}=T_{VJM}$; $V_R=V_{RRM}$; $V_D=V_{DRM}$	15	mA
V_T, V_F	I_T, I_F=300A; $T_{VJ}=25^oC$	1.74	V
V_{TO}	For power-loss calculations only ($T_{VJ}=T_{VJM}$)	0.85	V
r_T		3.2	mΩ
V_{GT}	V_D=6V; $T_{VJ}=25^oC$ $T_{VJ}=-40^oC$	1.5 1.6	V
I_{GT}	V_D=6V; $T_{VJ}=25^oC$ $T_{VJ}=-40^oC$	100 200	mA
V_{GD}	$T_{VJ}=T_{VJM}$; $V_D=2/3V_{DRM}$	0.25	V
I_{GD}	$T_{VJ}=T_{VJM}$; $V_D=2/3V_{DRM}$	10	mA
I_L	$T_{VJ}=25^oC$; t_p=30us; V_D=6V I_G=0.45A; di_G/dt=0.45A/us	200	mA
I_H	$T_{VJ}=25^oC$; V_D=6V; $R_{GK}=\infty$	150	mA
t_{gd}	$T_{VJ}=25^oC$; $V_D=1/2V_{DRM}$ I_G=0.45A; di_G/dt=0.45A/us	2	us
t_q	$T_{VJ}=T_{VJM}$; I_T=150A; t_p=200us; -di/dt=10A/us typ. V_R=100V; dv/dt=20V/us; $V_D=2/3V_{DRM}$	185	us
Q_S	$T_{VJ}=T_{VJM}$; I_T, I_F=50A; -di/dt=6A/us	170	uC
I_{RM}		45	A
R_{thJC}	per thyristor/diode; DC current per module	0.22 0.11	K/W
R_{thJK}	per thyristor/diode; DC current per module	0.42 0.21	K/W
d_S	Creeping distance on surface	12.7	mm
d_A	Creepage distance in air	9.6	mm
a	Maximum allowable acceleration	50	m/s^2

FEATURES

* International standard package
* DCB base plate
* Glass passivated chips
* Isolation voltage 3600 V~
* UL File NO.E310749
* RoHS compliant

APPLICATIONS

* DC motor control
* Softstart AC motor controller
* Light, heat and temperature control

ADVANTAGES

* Space and weight savings
* Simple mounting with two screws
* Improved temperature and power cycling
* Reduced protection circuits

Sirectifier®

©2008SIRECTIFIER All rights reserved,
www.sirectifier.com
Tel: +86-519-86800000 Fax: +86-519-88019019 E-mail: sales@sirectifier.com

SSAC100GKXX

Solid State AC Controller(Anti-Parallel Thyristor-Thyristor Modules)

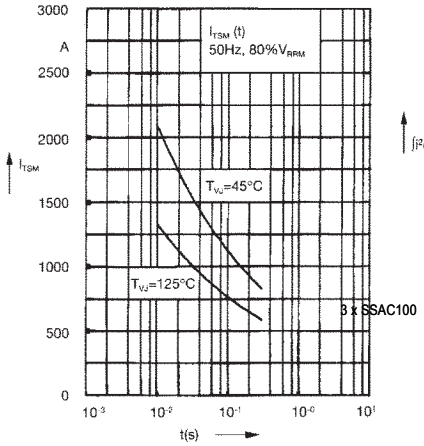


Fig. 1 Surge overload current
I_{TSM}, I_{FSM}: Crest value, t: duration

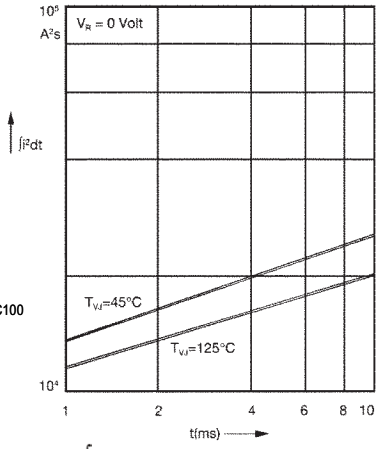


Fig. 2 $\int i^2dt$ versus time (1-10 ms)

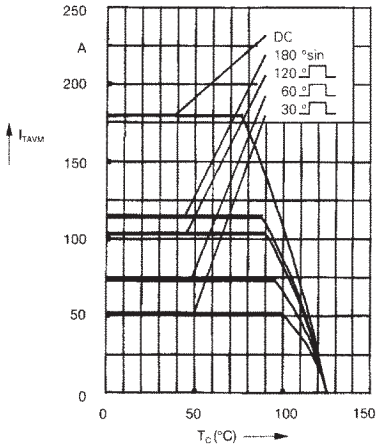


Fig. 2a Maximum forward current at case temperature

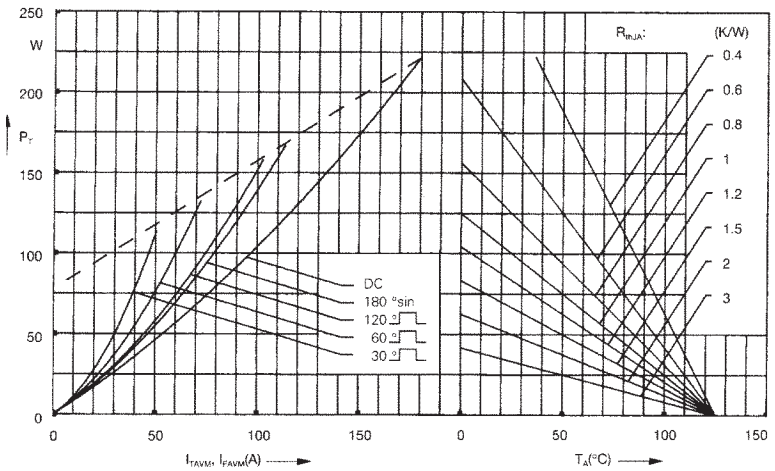


Fig. 3 Power dissipation versus on-state current and ambient temperature (per thyristor or diode)

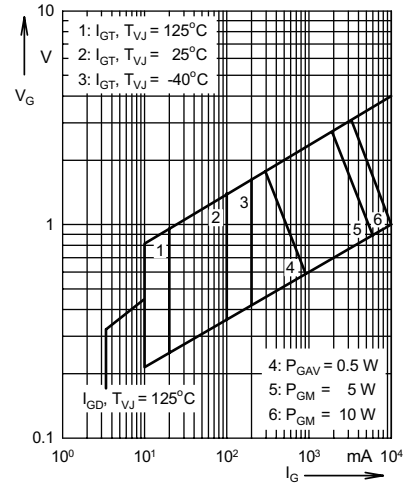


Fig. 4 Gate trigger characteristics

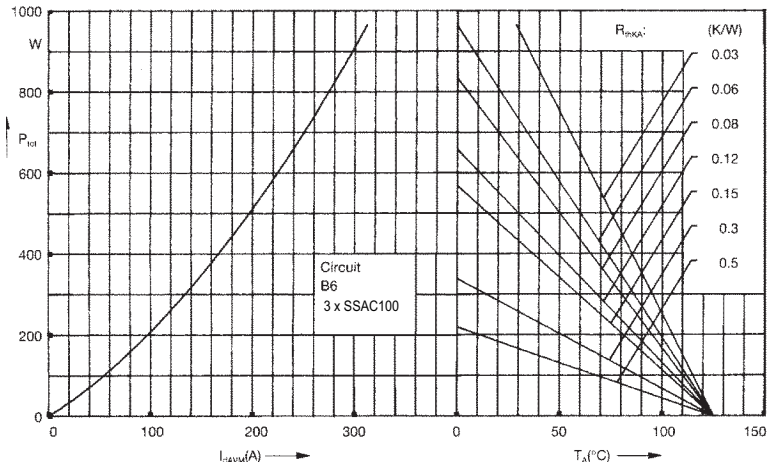


Fig. 5 Three phase rectifier bridge: Power dissipation versus direct output current and ambient temperature

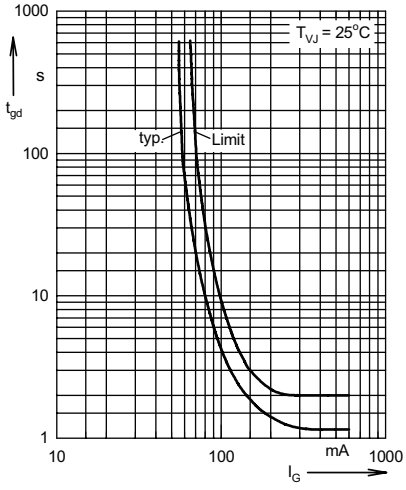


Fig. 6 Gate trigger delay time

©2008SIRECTIFIER All rights reserved,
www.sirectifier.com
Tel: +86-519-86800000 Fax: +86-519-88019019 E-mail: sales@sirectifier.com

SSAC100GKXX

Solid State AC Controller(Anti-Parallel Thyristor-Thyristor Modules)

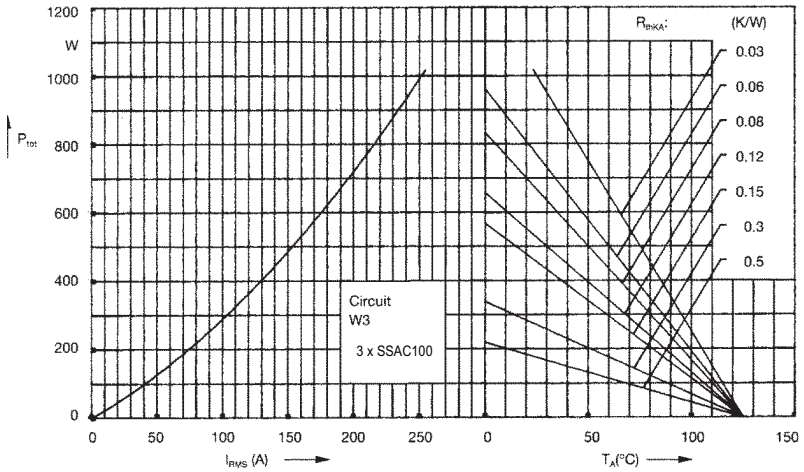


Fig. 7 Three phase AC-controller: Power dissipation versus RMS output current and ambient temperature

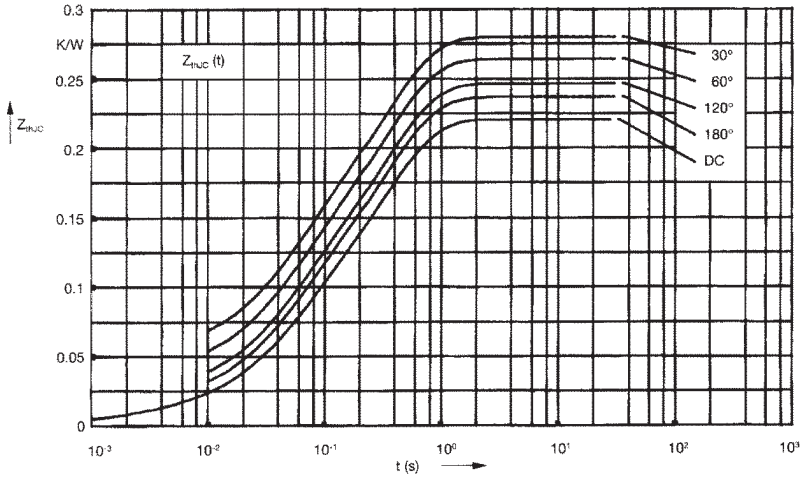


Fig. 8 Transient thermal impedance junction to case (per thyristor or diode)

R_{thJC} for various conduction angles d:

d	R_{thJC} (K/W)
DC	0.22
180°C	0.23
120°C	0.25
60°C	0.27
30°C	0.28

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0066	0.0019
2	0.0678	0.0477
3	0.1456	0.344

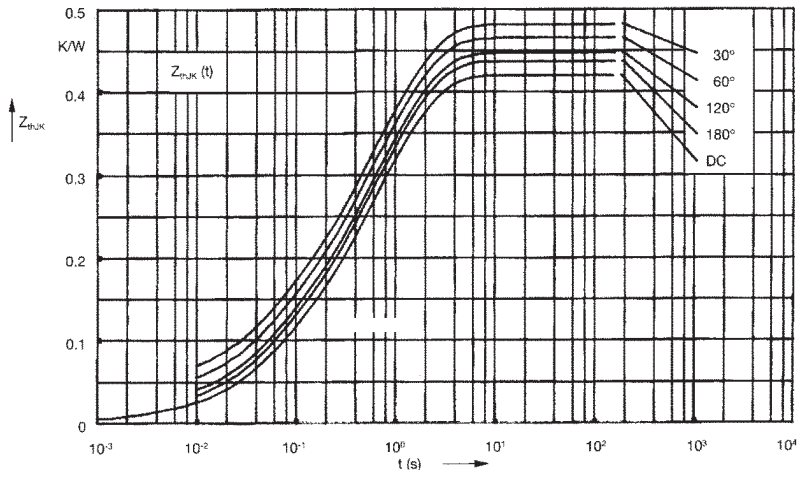


Fig. 9 Transient thermal impedance junction to heatsink (per thyristor or diode)

R_{thJK} for various conduction angles d:

d	R_{thJK} (K/W)
DC	0.42
180°C	0.43
120°C	0.45
60°C	0.47
30°C	0.48

Constants for Z_{thJK} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.0066	0.0019
2	0.0678	0.0477
3	0.1456	0.344
4	0.2	1.32

©2008SIRECTIFIER All rights reserved,
www.sirectifier.com
Tel: +86-519-86800000 Fax: +86-519-88019019 E-mail: sales@sirectifier.com