

# UG2KB05 THRU UG2KB100


SINGLE PHASE 2.0AMP GLASS PASSIVATED BRIDGE RECTIFIER

## Features

- Glass passivated die construction
- Low forward voltage drop
- High current capability
- High surge current capability
- Designed for surface mount application
- Plastic material-UL flammability 94V-0

## Mechanical Data

- Case: D3K,molded plastic
- Terminal: Plated leads solderable per MIL-STD 202,Method 208
- Polarity: As Marked on case
- Mounting Position:Any
- Marking: Type Number
- Lead Free: For RoHS/Lead Free Version

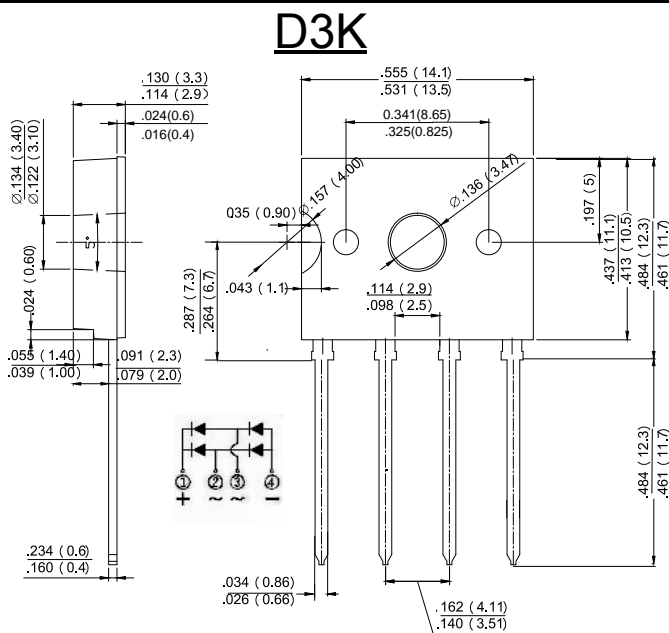

Dimensions in inches and ( millimeters )

## Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.  
Single Phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	UG2K B05	UG2K B10	UG2K B20	UG2K B40	UG2K B60	UG2K B80	UG2K B100	UNIT	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$								V	
	$V_{RWM}$	50	100	200	400	600	800	1000		
	$V_{DC}$									
RMS Reverse Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V	
Average Rectified Output Current Without heat sink @ $T_A=30^\circ C$ With heat sink @ $T_A=140^\circ C$	$I_o$	1.0								A
		2.0								
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	60								A
Forward Voltage per element @ $I_F=2.0A$	$V_{FM}$	1.1								V
Maximum DC reverse current at $T_A=25^\circ C$ rated DC blocking voltage per leg $T_A=125^\circ C$	$I_R$	5.0						500		$\mu A$
Typical Junction Capacitance per leg	$C_J$	21								pF
Typical thermal resistance per leg(Note 2)	$R_{\theta JA}$	55								$^\circ C/W$
	$R_{\theta JL}$	15								
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150								$^\circ C$

Note: 1.Measured at 1.0 MHZ and applied reverse voltage of 4.0VD.C.

Fig. 1 Output Current Derating Curve

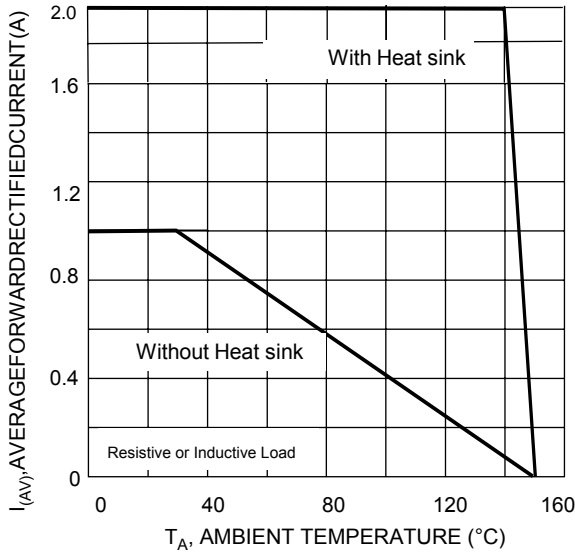


Fig. 2 Typical I Forward Characteristics (per leg)

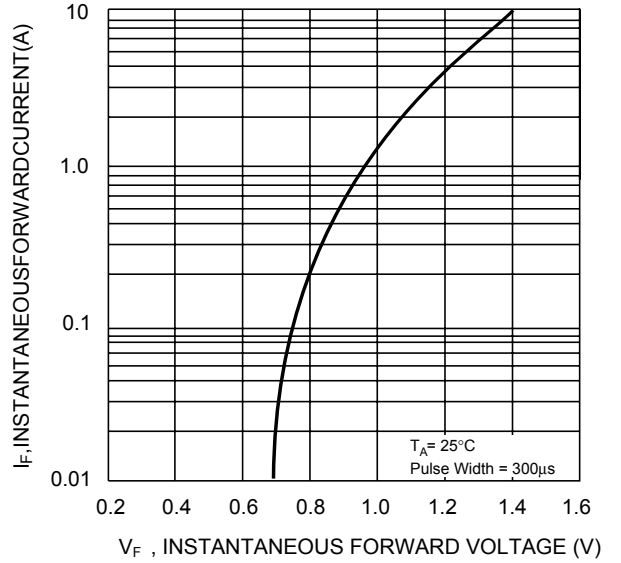


Fig. 3 Maximum Peak Forward Surge Current (per leg)

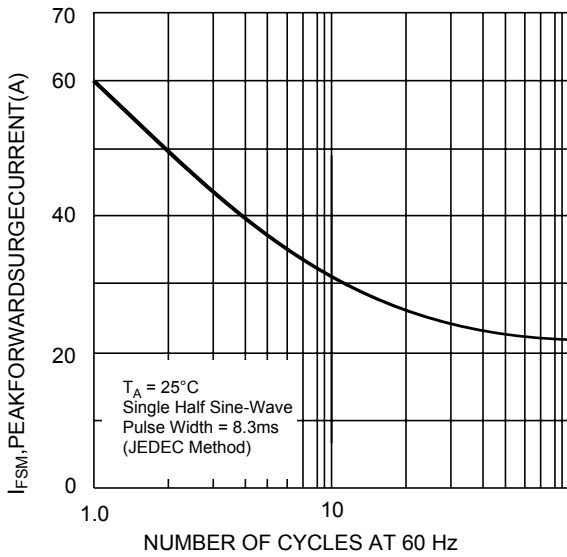


Fig.4 Typical Junction Capacitance Per Diode

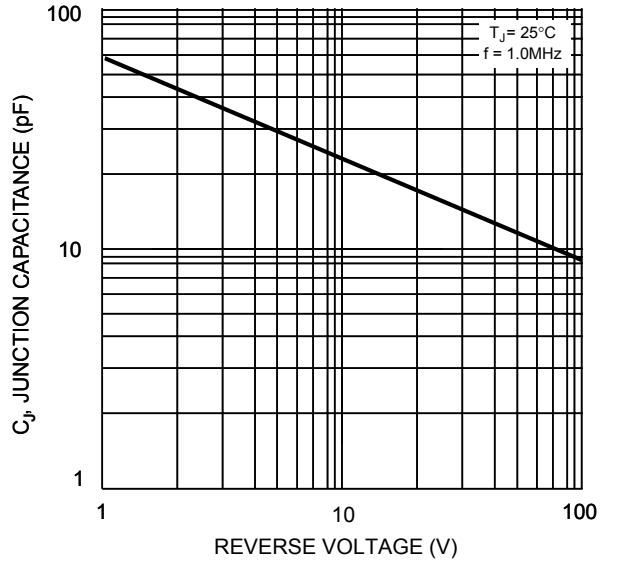


Fig. 5 Typical Reverse Characteristics (per element)

