



| CATALOG NUMBER | MATERIAL NUMBER | CABLE RANGE              | LENGTH "M"                 | N.P.T. FITTING SIZE | FORM SIZE |  UL LISTED |  CSA APPROVED | PRODUCT SELECTION NUMBER |
|----------------|-----------------|--------------------------|----------------------------|---------------------|-----------|-----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------|
| 36491          | -----           | .187-.250 / 4.75-6.35    | 4.000±0.500 / 101.60±12.70 | 3/8                 | 1         | ---                                                                                           |               | PG304F                   |
| 36433          | 1300970228      | .250-.312 / 6.35-7.92    | 4.250±0.500 / 107.95±12.70 |                     |           | ---                                                                                           |               | PG305F                   |
| 36434          | -----           | .312-.375 / 7.92-9.53    | 4.250±0.500 / 107.95±12.70 |                     |           | ---                                                                                           |               | PG306F                   |
| 36435          | 1300970229      | .375-.437 / 9.53-11.10   | 5.500±0.500 / 139.70±12.70 |                     |           | ---                                                                                           |               | PG307F                   |
| 36280          | 1300970184      | .187-.250 / 4.75-6.35    | 4.250±0.500 / 107.95±12.70 | 1/2                 | 2         | ---                                                                                           |               | PG404F                   |
| 36282          | 1300970185      | .250-.375 / 6.35-9.53    | 4.250±0.500 / 107.95±12.70 |                     |           | ---                                                                                           |               | PG406F                   |
| 36284          | 1300970186      | .375-.500 / 9.53-12.70   | 6.250±0.500 / 158.75±12.70 |                     |           | ---                                                                                           |               | PG408F                   |
| 36286          | 1300970187      | .500-.625 / 12.70-15.88  | 6.500±0.500 / 165.10±12.70 |                     |           | ---                                                                                           |               | PG410F                   |
| 36290          | 1300970191      | .250-.375 / 6.35-9.53    | 4.250±0.500 / 107.95±12.70 | 3/4                 | 2         | ---                                                                                           |               | PG606F                   |
| 36292          | 1300970627      | .375-.500 / 9.53-12.70   | 6.250±0.500 / 158.75±12.70 |                     |           | ---                                                                                           |               | PG608F                   |
| 36294          | 1300970192      | .500-.625 / 12.70-15.88  | 6.500±0.500 / 165.10±12.70 |                     |           | ---                                                                                           |               | PG610F                   |
| 36296          | 1300970496      | .625-.750 / 15.88-19.05  | 6.000±0.500 / 154.40±12.70 |                     |           | ---                                                                                           |               | PG612F                   |
| 36818          | 1300970293      | .375-.500 / 9.53-12.70   | 5.750±0.500 / 146.05±12.70 | 1                   | 4         | ---                                                                                           |               | PG809F                   |
| 36819          | 1300970628      | .500-.625 / 12.70-15.88  | 5.750±0.500 / 146.05±12.70 |                     |           | ---                                                                                           |              | PG811F                   |
| 36298          | 1300970193      | .625-.750 / 15.88-19.05  | 6.500±0.500 / 165.10±12.70 |                     |           | ---                                                                                           |             | PG812F                   |
| 36300          | 1300970194      | .750-.875 / 19.05-22.23  | 8.500±1.000 / 209.55±25.40 |                     |           | ---                                                                                           |             | PG814F                   |
| 36302          | 1300970195      | .875-1.000 / 22.23-25.40 | 9.250±1.000 / 234.95±25.40 |                     |           | ---                                                                                           |             | PG816F                   |

GRIP ASSEMBLED

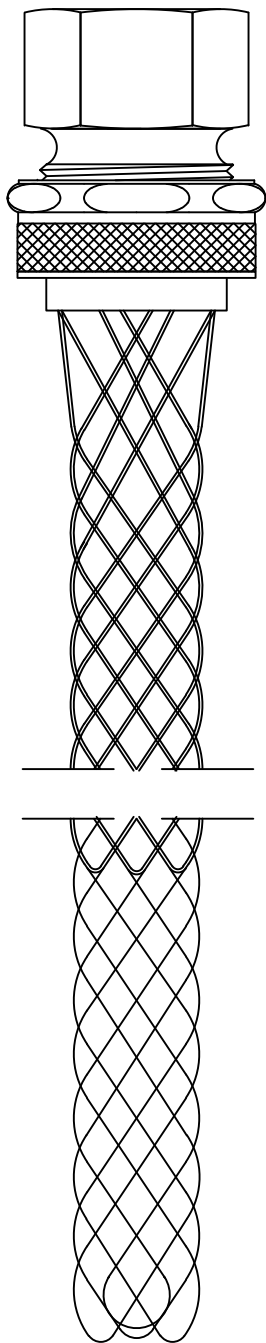

INSTRUCTIONS INCLUDED WITH GRIP

SINGLE/DOUBLE WEAVE MESH CONSTRUCTION

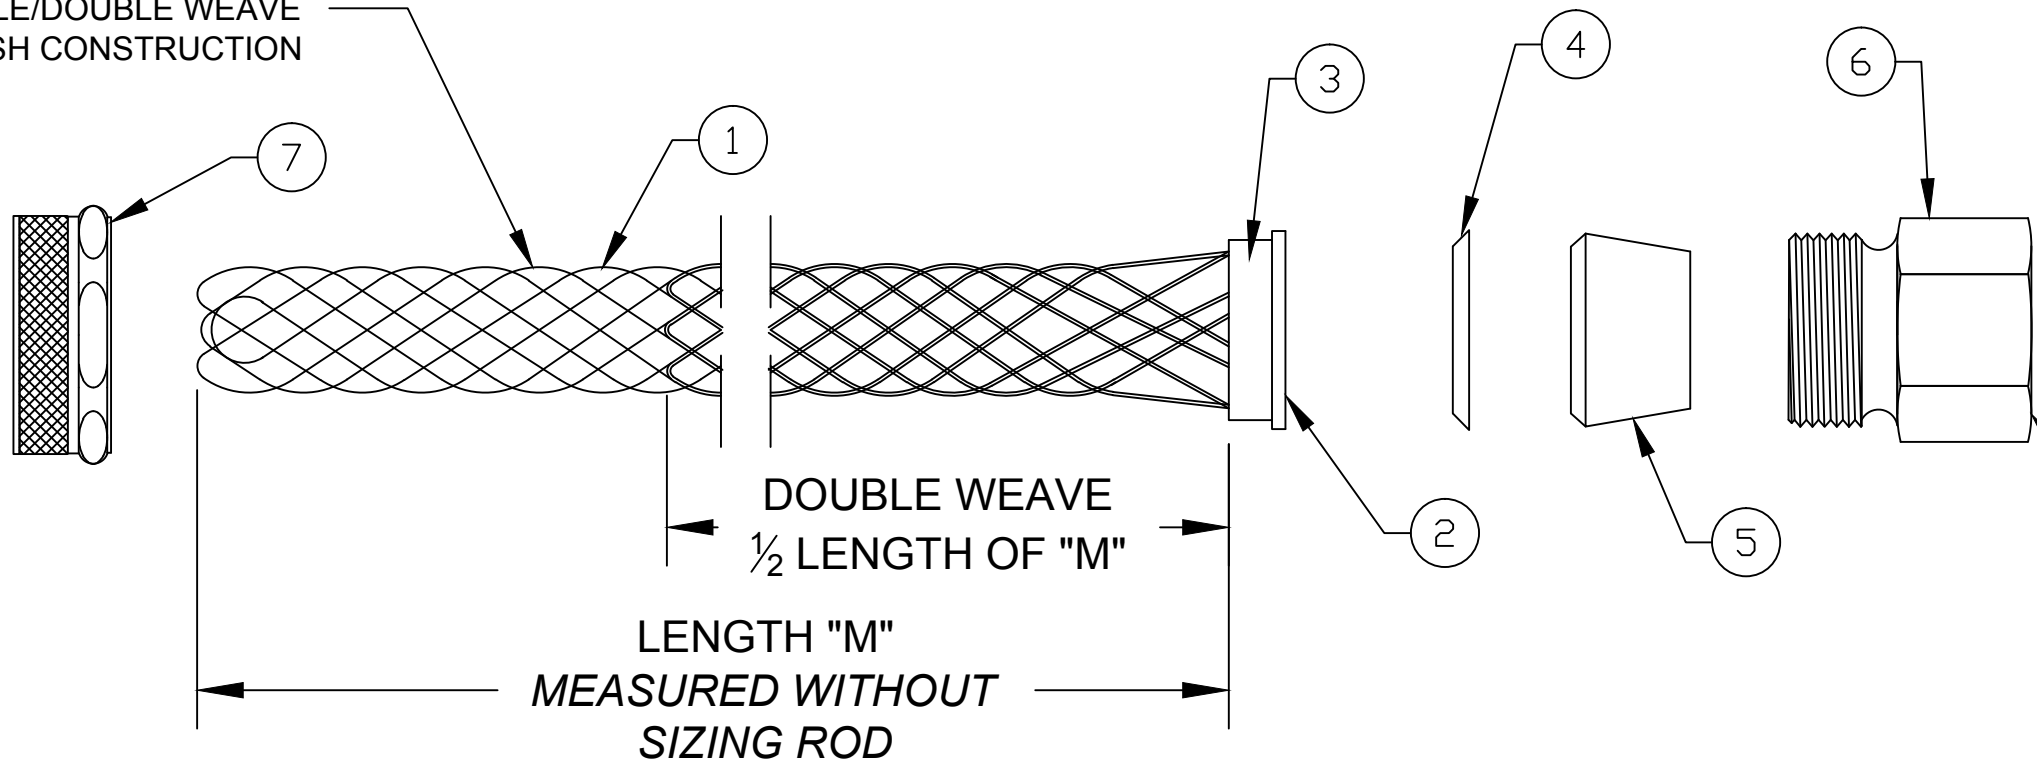

| ITEM | DESCRIPTION     | MATERIAL          |
|------|-----------------|-------------------|
| 1    | WIRE MESH       | STAINLESS STEEL   |
| 2    | INNER RING      | ALUMINUM          |
| 3    | OUTER RING      | ALUMINUM          |
| 4    | FRICTION RING   | ZINC PLATED STEEL |
| 5    | GROMMET         | RUBBER            |
| 6    | THREADED BODY   | ALUMINUM          |
| 7    | COMPRESSION NUT | ALUMINUM          |

36818 5.75" WAS 9.25"  
EC NO: IPG2017-0557  
DRWN: BPATTERS 12/1/16  
CH'KD: ---  
APPR: HKNEELAN 2016/05/04  
REV

QUALITY SYMBOL  
▽=0  
▽C=0

GENERAL TOLERANCES (UNLESS SPECIFIED)  
4 PLACES ±--- INCH  
3 PLACES ±--- INCH  
2 PLACES ±.13 INCH  
1 PLACE ±.25 INCH  
ANGULAR ±1/2°  
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE INCH/MM  
DRAWN BY HRUIZ01 DATE 2014/10/14  
CHECKED BY HKNEELAN DATE 2014/10/14  
APPROVED BY JFMURPHY DATE 2016/05/04  
MATERIAL NO. SEE TABLE  
SIZE C

SCALE NTS  
DESIGN UNITS INCH  
THIRD ANGLE PROJECTION  
STRAIN RELIEF DELUXE STRAIGHT FEMALE 3/8" TO 1" N.P.T.  
MOLEX INCORPORATED  
DOCUMENT NO. SD-130097-106  
SHEET NO. 1 OF 1