
This document was generated on 04/14/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0197114007

Status: Active

Description: PCB Tab Right Angle Quick Disconnect, Male, for Wire, Metal Strip, Tab 6.35mm (.250") x 0.81mm (.032")

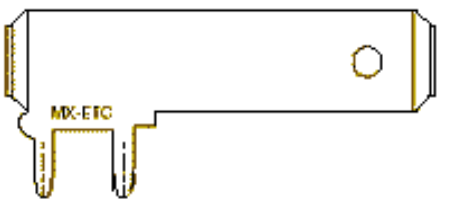

Series image - Reference only

Documents:

Drawing (PDF)

Product Specification PS-19902-010 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL	E79133

General

Product Family	Quick Disconnects
Series	19711
Crimp Quality Equipment	Yes
Product Name	PCB Tab
Type	Quick Disconnect

Physical

Barrel Type	N/A
Gender	Male
Glow-Wire Compliant	No
Insulation	None
Lock to Mating Part	None
Material - Metal	Brass
Orientation	PCB Flag Tab
Packaging Type	Reel
Polarized to Mating Part	No
Tab Thickness	0.81mm (.032")
Tab Width	6.35mm (.250")
Wire Insulation Diameter	N/A
Wire Size AWG	N/A

Electrical

Voltage - Maximum	N/A

Material Info

Reference - Drawing Numbers

Product Specification	PS-19902-010
Sales Drawing	SD-19711-400

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Not Reviewed
Halogen-Free Status
Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.


Search Parts in this Series
19711Series


This document was generated on 04/14/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


19711


MATERIAL NUMBER	ENGINEERING NUMBER	CARRIER
197114003	19711-4003	STRIP
197114007	19711-4007	

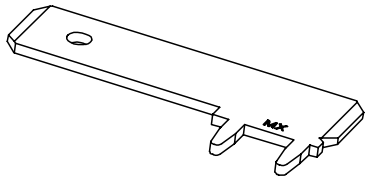

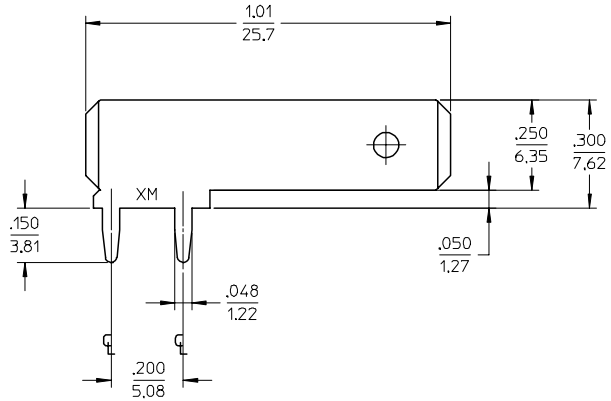

RECOMMENDED PCB HOLE LAYOUT

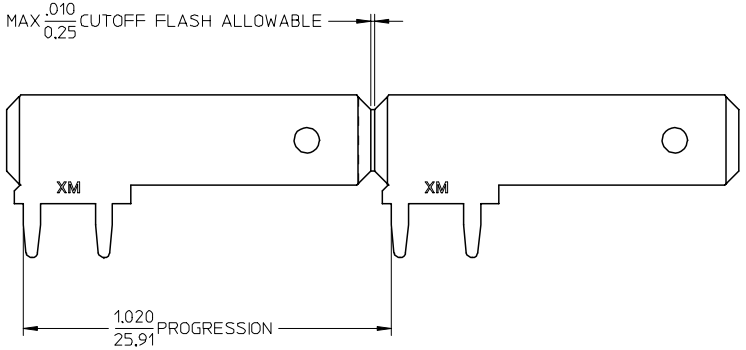

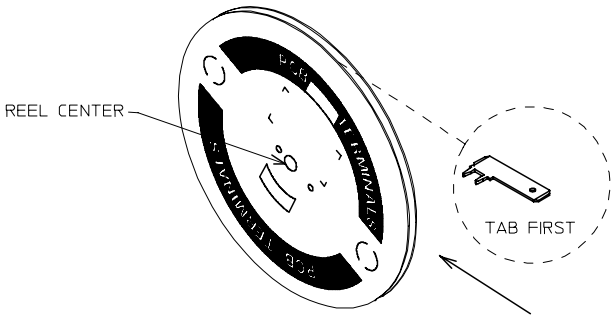

NOTES:

1. BARE EDGES PERMISSIBLE AT CARRIER CUT OFF.
2. MATERIAL: BRASS C26000 (.032/0.81) THICK
3. TAB CONFORMS TO NEMA SPECIFICATIONS.
4. ALL DIMENSIONS AND NOTES REFERENCE UNLESS OTHERWISE NOTED.
(G) 5. PLATING: MATTE TIN, 150µIN/3.81 µmm MINIMUM THICKNESS OVER NICKEL 50µIN/1.25µmm MINIMUM THICKNESS.
6. REF.: 5,000 MINIMUM PARTS PER REEL, REEL HAS 24" DIAMETER REEL WITH A 1.25" DIAMETER CENTER HOLE.

EC NO: ETC2003-0292
DRWN:DMYRICK 2004/05/13
CH'KD:H.BEITZE 2004/05/14
APPR:RDEROSS 2004/05/14
DESCRIPTION
REV
G

QUALITY SYMBOLS
▼- 0
▽- 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.25	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

SCALE 4:1
DESIGN UNITS INCH
DIMENSION STYLE IN/MM
THIRD ANGLE PROJECTION
REVISE ON CAD ONLY

DRAWN BY EDB DATE 11/08/96
CHECKED BY JH DATE 11/08/96
APPROVED BY RWD DATE 11/08/96

TITLE
QUICK DISCONNECT
PCB MOUNTABLE
.250 X .032 TAB

molex MOLEX INCORPORATED

MATERIAL NO. SEE CHART
DOCUMENT NO. SD-19711-400
SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

C

tb_frame_C-B1
rev. B1 2000/08/01