


Features

- Ultra low leakage: nA level
- Operating voltage: 5V
- Low clamping voltage
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 30\text{kV}$
 - Contact discharge: $\pm 30\text{kV}$
 - IEC61000-4-4 (EFT) 40A (5/50ns)
 - IEC61000-4-5 (Lightning) 6A (8/20 μs)
- RoHS Compliant



Applications

- USB 2.0 power and data line
- Set-top box and digital TV
- Digital video interface (DVI)
- Notebook Computers
- SIM Ports
- 10/100 Ethernet

Mechanical Characteristics

- Package: SOT-143
- Lead Finish: Matte Tin
- UL Flammability Classification Rating 94V-0

Absolute Maximum Ratings (Tamb=25°C unless otherwise specified)

Rating	Symbol	Value	Units
Peak Pulse Power ($tp = 8/20\mu\text{s}$)	P_{pk}	500	W
Peak Pulse Current ($tp = 8/20\mu\text{s}$)	I_{pp}	25	A
Peak Forward Voltage ($I_F = 1\text{A}$, $tp=8/20\mu\text{s}$)	V_{FP}	1.5	V
Lead Soldering Temperature	T_L	260 / 10S	°C
Operating Temperature	T_J	-55 to +125	°C
Storage Temperature	T_{STG}	-55 to +150	°C


Low Capacitance TVS Diode Array

Electrical Characteristics (TA=25°C unless otherwise specified)


Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_t = 1\text{mA}$	6			V
Reverse Leakage Current	I_R	$V_{RWM} = 5\text{V}, T=25^\circ\text{C}$			5	μA
Clamping Voltage	V_c	$I_{pp} = 1\text{A}, tp = 8/20\mu\text{s}$			9.8	V
Clamping Voltage	V_c	$I_{pp} = 10\text{A}, tp = 8/20\mu\text{s}$			12	V
Clamping Voltage	V_c	$I_{pp} = 25\text{A}, tp = 8/20\mu\text{s}$			20	V
Junction Capacitance	C_j	Between I/O pins and Ground $V_R = 0\text{V}, f = 1\text{MHz}$		6	10	pF
		Between I/O pins $V_R = 0\text{V}, f = 1\text{MHz}$		3		pF

Typical Characteristics


Non-Repetitive Peak Pulse Power vs. Pulse Time

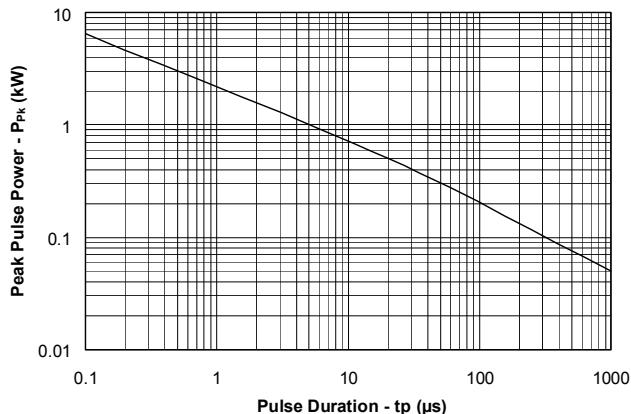


Power Derating Curve

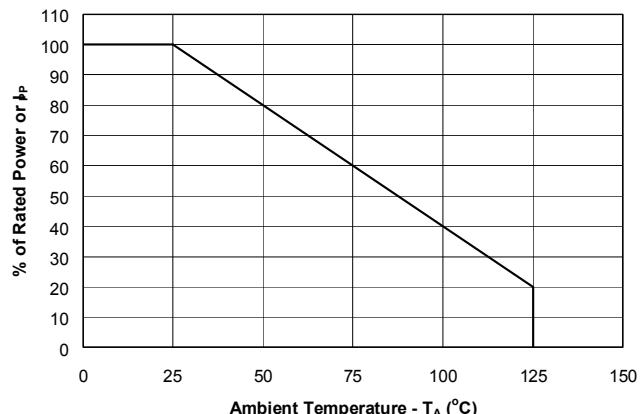


Pulse Waveform

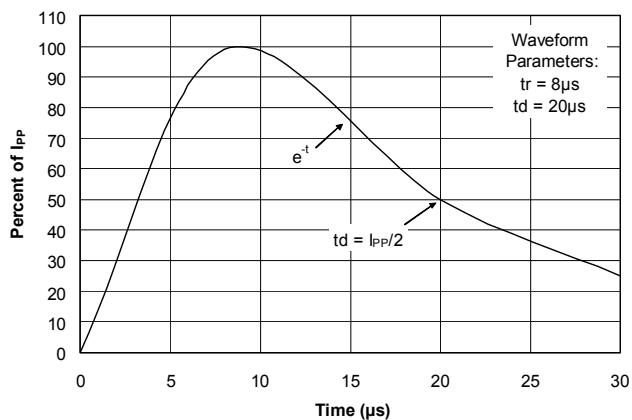


Clamping Voltage vs. Peak Pulse Current

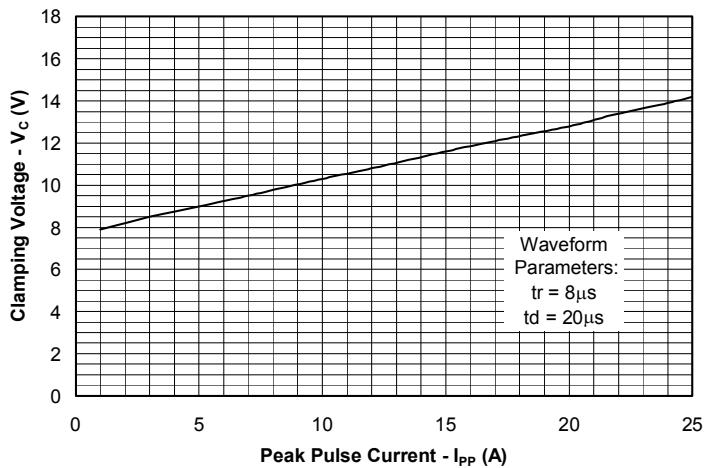


Forward Voltage vs. Forward Current

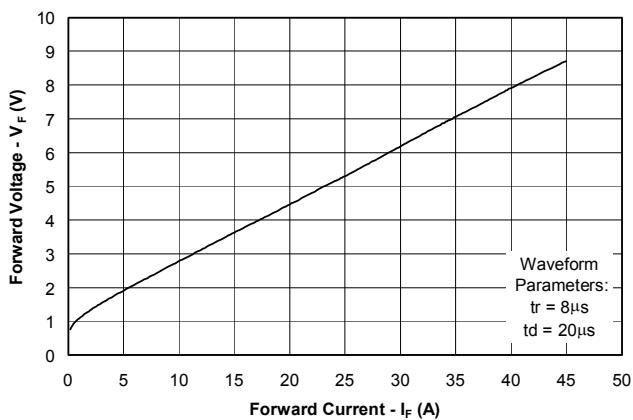

Capacitance vs. Reverse Voltage

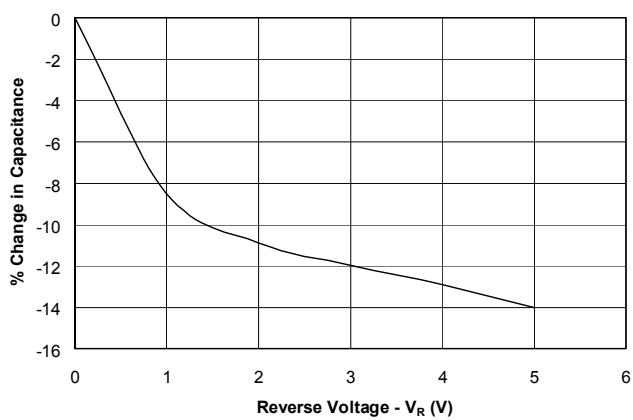


Outline Drawing - SOT-143

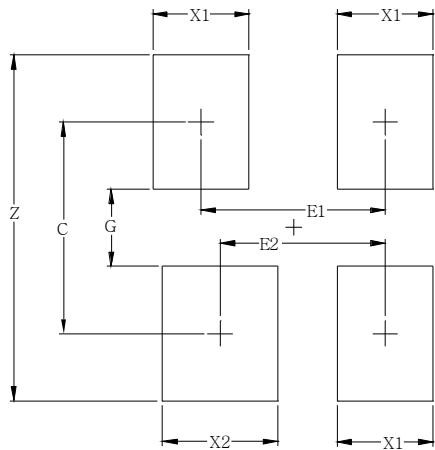

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
C	2.20	0.087
E1	1.92	0.076
E2	1.72	0.068
G	0.80	0.031
X1	1.00	0.039
X2	1.20	0.047
Y	1.40	0.055
Z	3.60	0.141

Marking



Ordering information

Order code	Package	Base qty	Delivery mode
UMW PSR05-LF-T7	SOT-143	3000	Tape and reel