


BS209

DMOS Transistors (P-Channel)

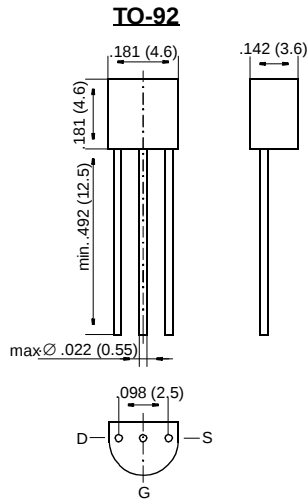

Dimensions in inches and (millimeters)

FEATURES

- ◆ High input impedance
- ◆ Low gate threshold voltage
- ◆ Low drain-source ON resistance
- ◆ High-speed switching
- ◆ No minority carrier storage time
- ◆ CMOS logic compatible input
- ◆ No thermal runaway
- ◆ No secondary breakdown



MECHANICAL DATA

Case: TO-92 Plastic Package

Weight: approx. 0.18 g

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Value	Unit
Drain-Source Voltage	$-V_{DSS}$	400	V
Drain-Gate Voltage	$-V_{DGS}$	400	V
Gate-Source Voltage (pulsed)	V_{GS}	± 20	V
Drain Current (continuous) at $T_{amb} = 25\text{ }^{\circ}\text{C}$	$-I_D$	120	mA
Power Dissipation at $T_{amb} = 25\text{ }^{\circ}\text{C}$	P_{tot}	830 ¹⁾	mW
Junction Temperature	T_j	150	$^{\circ}\text{C}$
Storage Temperature Range	T_S	-65 to +150	$^{\circ}\text{C}$

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 2 mm from case.

Inverse Diode

	Symbol	Value	Unit
Max. Forward Current (continuous) at $T_{amb} = 25\text{ }^{\circ}\text{C}$	I_F	400	mA
Forward Voltage Drop (typ.) at $V_{GS} = 0\text{ V}$, $I_F = 400\text{ mA}$, $T_j = 25\text{ }^{\circ}\text{C}$	V_F	1.0	V

BS209

ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage at $-I_D = 100 \mu A$, $V_{GS} = 0 V$	$-V_{(BR)DSS}$	400	430	—	V
Gate-Body Leakage Current, Forward at $-V_{GSF} = 20 V$, $V_{DS} = 0 V$	$-I_{GSSF}$	—	—	100	nA
Gate-Body Leakage Current, Reverse at $-V_{GSR} = 20 V$, $V_{DS} = 0 V$	$-I_{GSSR}$	—	—	100	nA
Drain Cutoff Current at $-V_{DS} = 400 V$, $V_{GS} = 0 V$	$-I_{DSS}$	—	—	500	nA
Gate-Source Threshold Voltage at $V_{GS} = V_{DS}$, $-I_D = 250 \mu A$	$-V_{GS(th)}$	1	1.5	2.5	V
Drain-Source ON Resistance at $-V_{GS} = 5 V$, $-I_D = 120 mA$	$R_{DS(on)}$	—	50	60	Ω
Capacitance at $-V_{DS} = 25 V$, $V_{GS} = 0$, $f = 1 MHz$ Input Capacitance Output Capacitance Feedback Capacitance	C_{iSS} C_{oSS} C_{rSS}	— — —	200 30 10	— — —	pF pF pF
Switching Times at $-V_{GS} = 10 V$, $-V_{DS} = 10 V$, $R_D = 100 \Omega$ Turn-On Time Turn-Off Time	t_{on} t_{off}	— —	10 50	— —	ns ns
Thermal Resistance Junction to Ambient Air	R_{thJA}	—	—	150 ¹⁾	K/W

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 2 mm from case.