Crystal Clock Oscillator

NDK Crystal Bridge to the Future

NZ3225SD Low Phase Noise Type

■ Application

- For High-quality-audio, Smartphone, Tablet computers, Wireles module, Notebook PC and DSC



■ Features

- Low phase noise make this product ideal for High quality audio.
- Compact and light. Dimensions : 3.2 x 2.5 x 0.9 mm, weight : 0.02 g.
- Wide frequency range: 1.5 to 80 MHz.
- Automatic mounting by taping and IR reflow (lead-free) are possible.
- Lead-free.

Pb Free

RoHS Compliant
Directive 2011/65/EU

Absolute maximum rating
Supply Voltage (V_{CC}) –0.6 to +6.0 V
Storage Temperature Range –55 to +125 °C


■ Specifications

Item			Model	NZ3225SD		
Output Level				CMOS		
Nominal Frequency Range			(MHz)	1.5 to 80		
Overall Frequency Tolerance			(×10^{-6})	±50	±30	±20
Operating Temperature Range			(°C)	–40 to +85	–10 to +70	–10 to +60
Supply Voltage			(V)	+1.8 to +3.3		
Current Consumption Max.	During Operation	+25 °C	(mA)	1.8 to 8.5		
	During Standby	+25 °C	(µA)	10		
V_{OL} Max. / V_{OH} Min.			(V)	0.1 V_{CC} / 0.9 V_{CC}		
Tr Max. / Tf Max.			(ns)	6 / 6		
Symmetry Min. to Max.			(%)	45 to 55		
Load (C_L) Max.			(pF)	15		
Start-up Time Max.			(ms)	4		
Standby function				Available (Three-state)		

■ Characteristics


			F=20MHz	F=40MHz	F=60MHz	F=80MHz
+1.8V, +25 °C	Fout±1 kHz (Typ.)	(dBc/Hz)	–147	–143	–139	–136
	Fout±100 kHz (Typ.)		–156	–154	–150	–150
+2.5 to +3.3V, +25 °C	Fout±1 kHz (Typ.)		–151	–148	–142	–136
	Fout±100 kHz (Typ.)		–157	–156	–156	–154

■ Dimensions

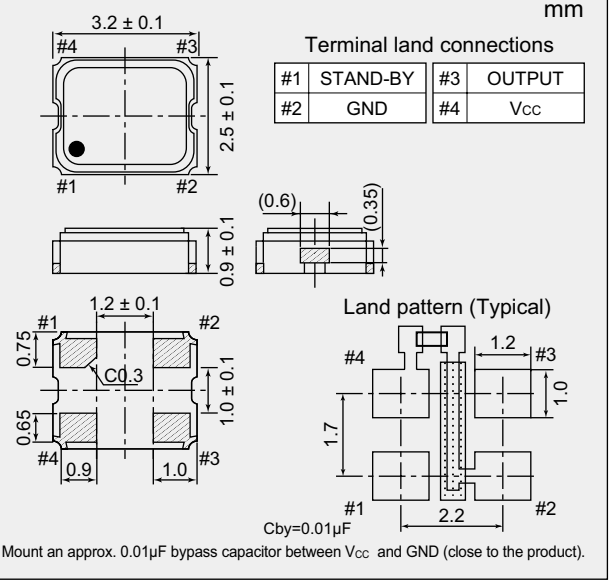

Mount an approx. 0.01µF bypass capacitor between V_{CC} and GND (close to the product).

■ Output Waveform <CMOS>

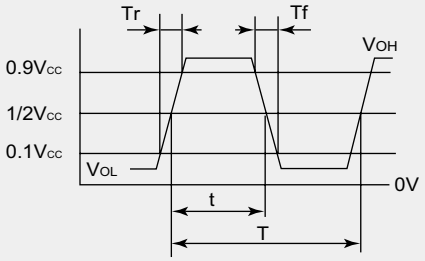

Symmetry = t/T × 100 [%]

■ Standby Function

#1 Input	#3 Output
Level H (0.7 V_{CC} ≤ V_{IH} ≤ V_{CC}) or OPEN is selected.	Oscillation output ON
Level L (V_{IL} ≤ 0.3 V_{CC}) is selected.	High impedance

Crystal Clock Oscillator

Crystal Bridge to the Future

NZ3225SD Low Phase Noise Type

■ Specification Number

Overall Frequency Tolerance	Operating Temperature Range(°C)	Supply Voltage (V)			
		+1.8±0.18	+2.5±0.25	+2.8±0.28	+3.3±0.33
±50 × 10^{-6}	–40 to +85	NSC5032A	NSC5032B	NSC5032C	NSC5032D
±30 × 10^{-6}	–10 to +70	NSC5034A	NSC5034B	NSC5034C	NSC5034D
±20 × 10^{-6}	–10 to +60	NSC5035A	NSC5035B	NSC5035C	NSC5035D

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.