



Specifications:
 Voltage rating:500V AC/DC
 Current rating:2A AC/DC
 Withstanding voltage:1500V AC/minute
 Temperature range: -40℃~85℃
 Insulation resistance:≥1000MΩ
 Contact resistance:≤40mΩ
 After environmental testing:≤80mΩ

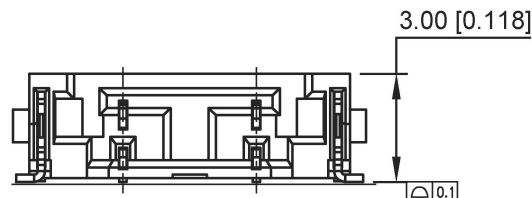

PCB LAYOUT

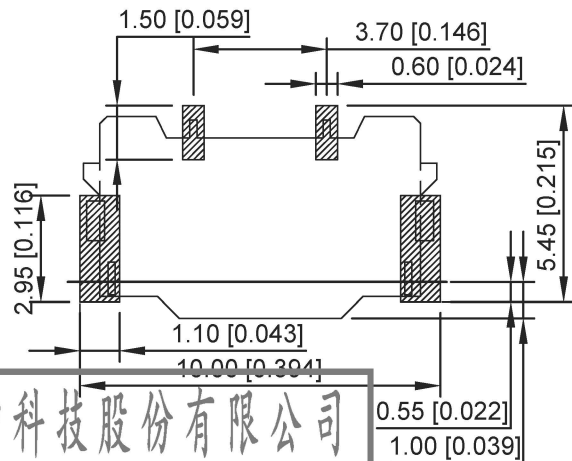

X3700W F-02HF-LPSN

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
- ② Category:W-WAFER
- ③ Welding Board Angle:F-Female
- ④ Row No.-Pin No.:XX-Single Row
- ⑤ Plug the Pin&Special No.:HF-Halogen Free
- ⑥ Material:LP-LCP 94V-0
- ⑦ Plating Category:SN-Bright Tin Plating

X3700WM-02HF-LPSN	LCP UL 94V-0 Halogen Free	Phosphor Bronze	Tin-Plated	Phosphor Bronze	Tin-Plated	X3700WM
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tab)	Finish (Solder Tab)	Mates With Housing

广东星坤科技股份有限公司

生 日期
 發 日期

ΔX
 MARK 文件工程章

REVISIONS

www.xk-lg.cn www.helloxkb.com www.helloxkb.cn

ANGULAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5

UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE: X3700WF-02HF-LPSN
DWN	DATE	VIEW:	PART NO.: 3.70mm BTB Style Connectors
CHKD	DATE	UNIT: mm/in	DWG NO.:
APPD	DATE	SIZE: A4	
KKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0