



1. Dimensions:

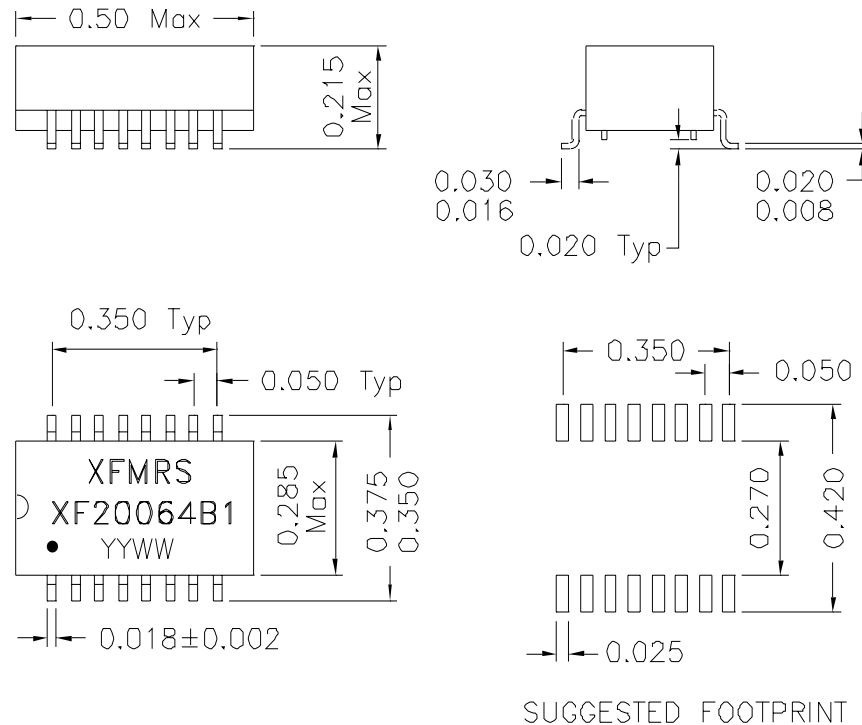

2. Schematic:

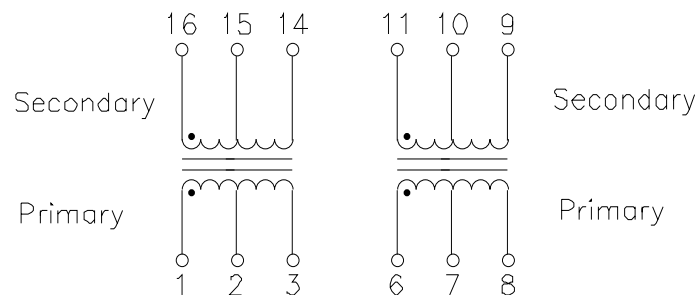

Doc Rev B/1

3. Electrical Specifications:@25°C

Isolation Voltage: 1500 VAC

Turns Ratio: (1-2-3):(16-15-14)=1CT:1CT $\pm 2\%$

Turns Ratio: (6-7-8):(11-10-9)=1CT:2CT $\pm 2\%$

PRI OCL: 200uH $\pm 20\%$ @100KHz 50mV

Cw/w: 15pF Maximum @100KHz 50mV (Pri/Sec)

Leakage Inductance: 0.3uH Maximum @100KHz 50mV
@PRI, WITH SEC SHORTED

DCR: 0.30 Ohms Maximum (PIN1-3, PIN16-14, PIN6-8)

DCR: 0.50 Ohms Maximum (PIN11-9)

XFMR5 Inc		Title: 10 BASE T ISOLATION MAGNETICS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF20064B1		REV. B
	DWN.	李湾儿	Jan13, 99
	CHK.	孙小松	Jan13, 99
	APP.	BUDDY W.	Jan13, 99
SHEET 1 OF 1			