# Silicon Standard Recovery Diode

$V_{RRM}$ = 100 V - 600 V

$I_F$ =16 A

**Features**

- High Surge Capability
- Types from 100 V to 600 V $V_{RRM}$
- Not ESD Sensitive

**Note:**

1. Standard polarity: Stud is cathode.
2. Reverse polarity (R): Stud is anode.
3. Stud is base.

**DO-4 Package**






RoHS COMPLIANT

REACH COMPLIANCE


**Maximum ratings, at $T_j$ = 25 °C, unless otherwise specified ("R" devices have leads reversed)**

| Parameter | Symbol | Conditions | S16B (R) | S16D (R) | S16G (R) | S16J (R) | Unit |
|---|---|---|---|---|---|---|---|
| Repetitive peak reverse voltage | $V_{RRM}$ | | 100 | 200 | 400 | 600 | V |
| RMS reverse voltage | $V_{RMS}$ | | 70 | 140 | 280 | 420 | V |
| DC blocking voltage | $V_{DC}$ | | 100 | 200 | 400 | 600 | V |
| Continuous forward current | $I_F$ | $T_C \leq 140$ °C | 16 | 16 | 16 | 16 | A |
| Surge non-repetitive forward current, Half Sine Wave | $I_{F,SM}$ | $T_C$ = 25 °C, $t_p$ = 8.3 ms | 370 | 370 | 370 | 370 | A |
| Operating temperature | $T_j$ | | -55 to 150 | -55 to 150 | -55 to 150 | -55 to 150 | °C |
| Storage temperature | $T_{stg}$ | | -55 to 150 | -55 to 150 | -55 to 150 | -55 to 150 | °C |

**Electrical characteristics, at Tj = 25 °C, unless otherwise specified**


| Parameter | Symbol | Conditions | S16B (R) | S16D (R) | S16G (R) | S16J (R) | Unit |
|---|---|---|---|---|---|---|---|
| Diode forward voltage | $V_F$ | $I_F$ = 16 A, $T_j$ = 25 °C | 1.1 | 1.1 | 1.1 | 1.1 | V |
| Reverse current | $I_R$ | $V_R$ = 50 V, $T_j$ = 25 °C | 10 | 10 | 10 | 10 | µA |
| | | $V_R$ = 50 V, $T_j$ = 175 °C | 12 | 12 | 12 | 12 | mA |
| **Thermal characteristics** | | | | | | | |
| Thermal resistance, junction - case | $R_{thJC}$ | | 2.50 | 2.50 | 2.50 | 2.50 | °C/W |

Figure .1-Typical Forward Characteristics

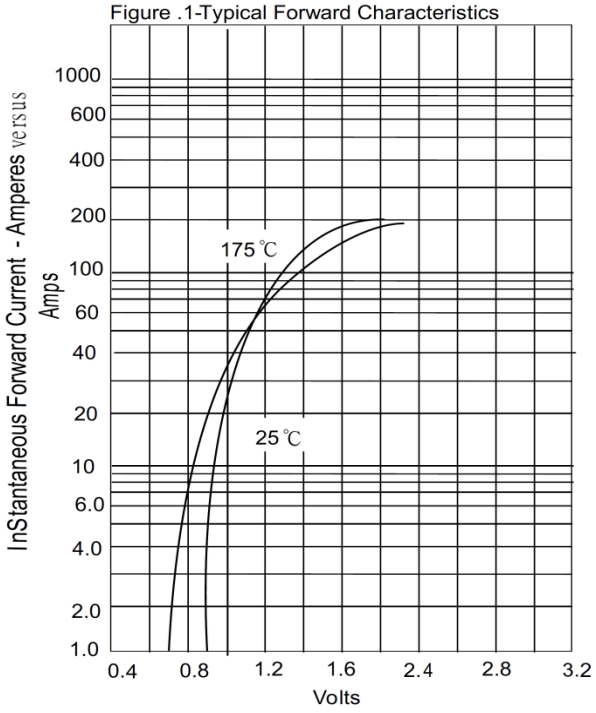



Instantaneous Forward Voltage - Volts

Figure .2-Forward Derating Curve

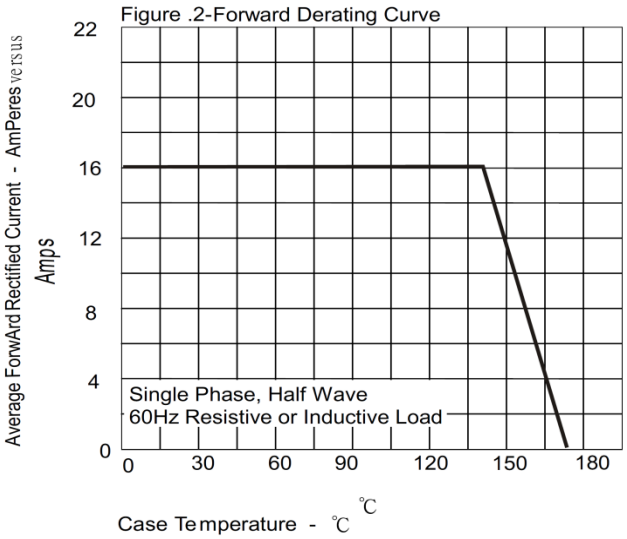



Case Temperature - ℃

Figure .3-Peak Forward Surge Current

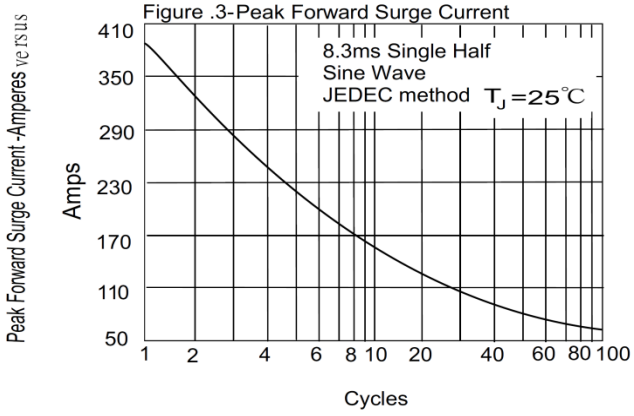


Number Of Cycles At 60Hz - Cycles

Figure .4-Typical Reverse Characteristics

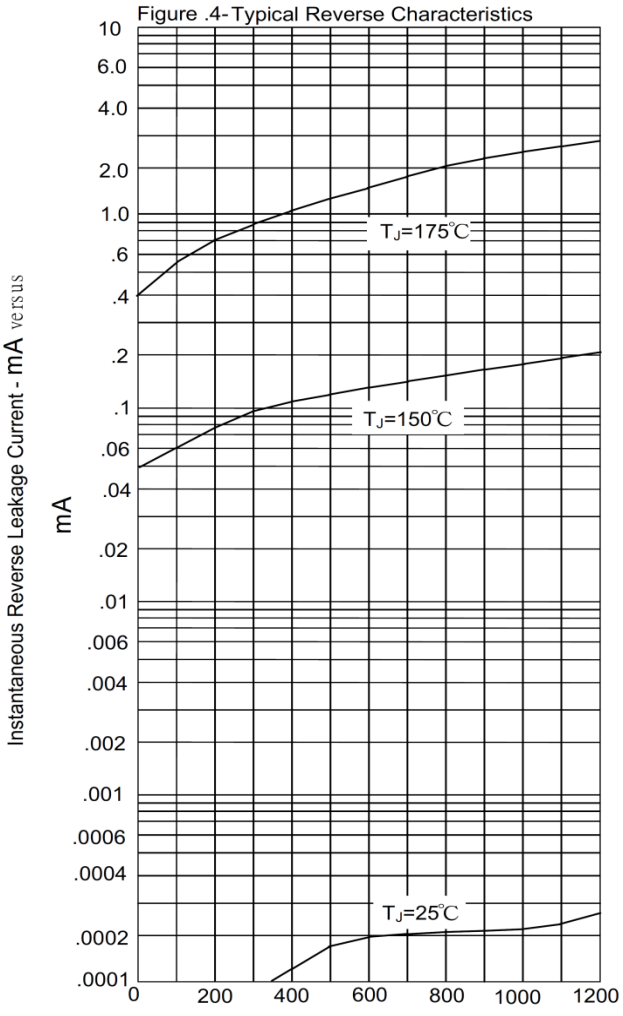



Reverse Voltage - Volts

## Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

**DO- 4 (DO-203AA)**

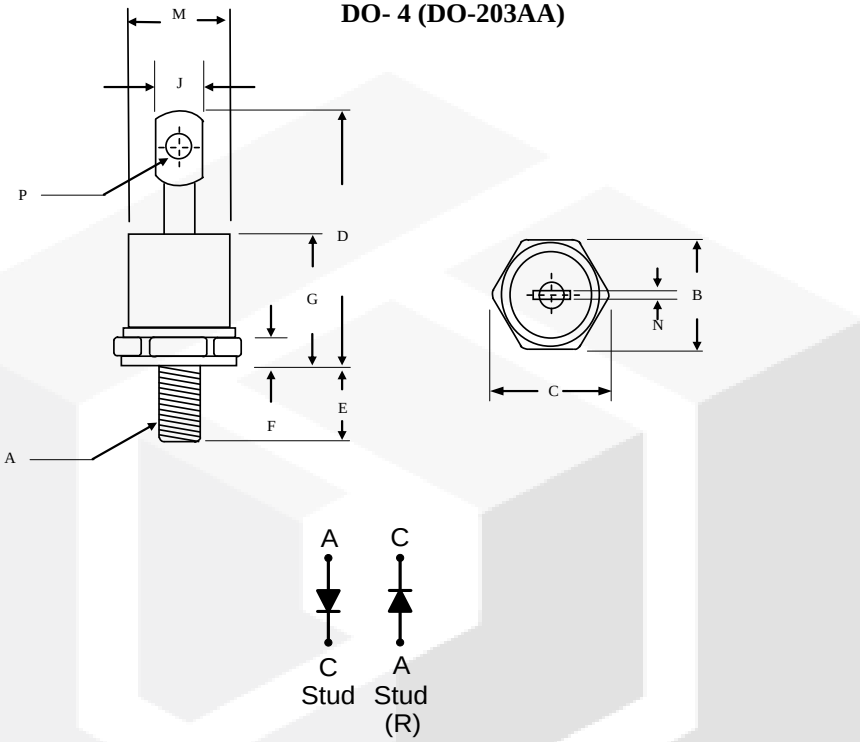


| | Inches | | Millimeters | |
|---|---|---|---|---|
| | Min | Max | Min | Max |
| A | 10-32 UNF | | | |
| B | 0.424 | 0.437 | 10.77 | 11.10 |
| C | ----- | 0.505 | ----- | 12.82 |
| D | ------ | 0.800 | ----- | 20.30 |
| E | 0.453 | 0.492 | 11.50 | 12.50 |
| F | 0.114 | 0.140 | 2.90 | 3.50 |
| G | ----- | 0.405 | ----- | 10.29 |
| J | ----- | 0.216 | ----- | 5.50 |
| M | ----- | φ0.302 | ----- | φ7.68 |
| N | 0.031 | 0.045 | 0.80 | 1.15 |
| P | 0.070 | 0.79 | 1.80 | 2.00 |
| | | | | |