

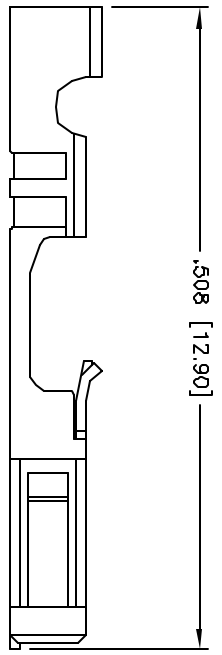


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	

APPROVED: _____
 DATE: _____ TITLE: _____



SPECIFICATIONS:

Material:
Contact: Phosphor Bronze

Plating:
 Tin over Copper underplate overall
 or Gold flash over Nickel underplate overall

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 30 mohms max
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +105°C

Packaging:
 R = Chain on reel
 B = Loose in bag
Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 230°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HILES
.10	±.10
XX ±.020	ØXX ±.013
.XX ±.015	ØXXX ±.010
APPROVALS	DATE
DRAWN SS	4/7/05
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	CRIMP CONTACT
SIZE	PART NO.
X	CDHCX
REF:	SCALE: NIB
	SHEET 1 OF 1
	REV: -

6 5 4 3 2 1